Low voltage
Extract from Tesys Catalogue | 2018

TeSys

Coordination and standards

Life Is On Schneider Electric

Complementary technical information: coordination and standards

Coordination between protection and control components

Type of information	Page
Types of coordination, according to the standard currents in the circuit to be considered	A6/2
Selection of the coordination type	A6/3

Suggested coordinated Direct-On-Line motor starter combinations

Fuse + contactors + thermal overload relay	A6/4
Circuit breaker (with built in overload protection) + contactors	A6/9
Circuit breaker + contactors + thermal overload relay	A6/11

Suggested coordinated Star-delta motor starter combinations

Fuse + contactors + thermal overload relay	A6/15
Circuit breaker (with built in overload protection) + contactors	A6/18
Circuit breaker + contactors + thermal overload relay	A6/20

Contactors: Utilisation categories – Standard characteristics – Selection tables per categorie

Definition: utilisation categories : AC-1, AC-2, AC-3	A6/24
Definition: contactor standard characteristics	A6/25
Contactor selection tables per utilisation categorie	A6/26

Contactors for specific application – Design information

Selection of contactors for lighting circuits	A6/40
Selection of contactors for heating circuits	A6/46
Selection of contactors for switching primaries of 3P LV/LV transformers	A6/48
Selection of contactors for switching 3P capacitor banks (factor correction)	A6/49
Selection of contactors auto-transformer starting	A6/50
Selection of contactors for rotor circuit of slip-ring motors	A6/52
Design of long distance remote control for contactors	A6/54
Current of asynchronous squirrel cage motors at nominal load	A6/58

Standards – Protection against contact – Protective treatments

International standards and certifications	A6/59
Protective product treatments, according environment or climate	A6/61
Protection against accidental direct contacts / IP codes	A6/63

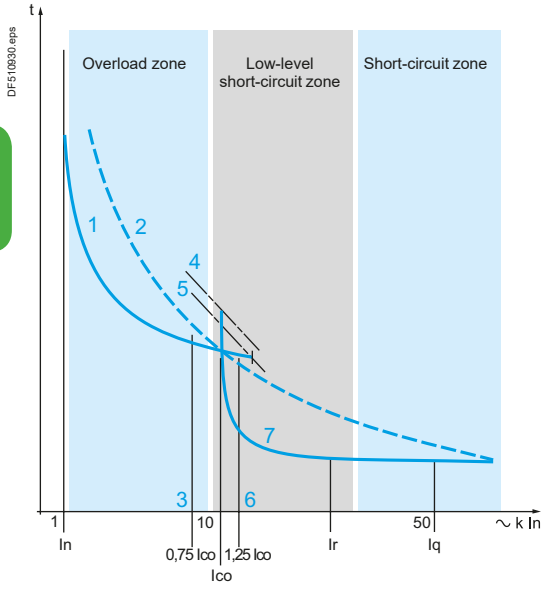

1 Thermal overload relay curve.
2 Fuse.
3 Tripping of thermal overload relay only.
4 Thermal limit of the circuit breaker.
5 Thermal overload relay limit.
6 Current broken by the SCPD (1).
7 Circuit breaker magnetic trip.

Type 1 and type 2 coordination according to the standard

The standard defines tests at different levels of current; the purpose of these tests is to place the equipment in extreme conditions.
The standard defines 2 types of coordination, according to the condition of the components after testing:
type 1,
type 2.
To determine the type of coordination, the standard requires that the behaviour of the equipment be tested under overload and short-circuit conditions for 3 fault current values, covering overload and short-circuit conditions.

Type 1 coordination

Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.

Type 2 coordination

Type 2 coordination requires that In a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must subsequently be able to resume operation. The risk of contact welding is permissible; in this case, the manufacturer must indicate measures to be taken regarding maintenance of the equipment.

Type 2 coordination increases reliability of operation.

Current values

Current “Ico” (overload I < 10 In)

The thermal overload relay associated with the contactor provides protection against this type of fault, up to a value Ico (see curve) defined by the manufacturer.

Standard IEC 60947-4-1 specifies the 2 current values to be used for checking coordination between the thermal overload relay and the short-circuit protection device:
- at 0.75 Ico only the thermal overload relay must trip,
- at 1.25 Ico the short-circuit protection device must operate.

Current “r” (low level short-circuit 10 < I < 50 In)

The main cause of this type of fault is the deterioration of insulating materials.
Standard IEC 60947-4-1 defines an intermediate short-circuit current “r”. This test current makes it possible to check whether the protection device is providing protection against low-level short-circuits.

Operational current Ie (AC-3) (A)	**Current “r”** (kA)
Ie ⩽ 16	1
16 < Ie ⩽ 63	3
63 < Ie ⩽ 125	5
125 < Ie ⩽ 315	10
315 < Ie ⩽ 630	18
630 < Ie ⩽ 1000	30

Current “Iq” (short-circuit > current “r”)

This type of fault corresponds to a dead short and is relatively rare. It can be caused by a connection error during maintenance work. Short-circuit protection is provided by fast operating devices.

Standard IEC 60947-4-1 defines a current “Iq”. The coordination tables supplied by Schneider Electric are based on a current “Iq” that is generally ⩾ 50 kA.

(1) SCPD: short-circuit protection device.

Selection

No coordination

Considerable risks to both persons and equipment.

Not authorised by standards:
□ NF C 15-100 and IEC 60364-1, article 133-1
(installation regulations),
□ EN/IEC 60204-1, article 7
(electrical equipment in machines),
□ IEC 60947-4-1, article 8.2.5. (starters)

Type 1 coordination

The most frequently used solution.

■ Equipment costs are lower.
■ Reliability of operation is not a requirement.
■ Before restarting, it may be necessary to repair the motor starter.

Consequences:
□ significant amount of machine downtime,
□ skilled maintenance personnel required to repair, check, obtain supplies.

Example: air conditioning in commercial premises.

Type 2 coordination

This solution ensures reliability of operation.

Consequences:
□ reduced machine downtime,
□ reduced maintenance after a short-circuit.

Example: escalators.

Total coordination

With this solution, no damage or misadjustment is permissible and reliability of operation is guaranteed.

Consequences:
□ immediate return to service,
□ no special precautions required.

Examples: smoke extraction, fire-fighting pumps.

TeSys motor starters - open version

D.O.L starters with fuse protection (NF C or DIN fuses, type aM), contactor and thermal overload relay

0.06 to 55 kW at 400/415 V: type 1 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Fuse carrier [1] (basic block)	aM fuses		Contactor	Thermal overload relay class 10	
400/415 V		440 V		500 V		Reference	Size	Rating	Reference [2]	Reference	Setting range
P	Ie	P	Ie	P	Ie						
kW	A	kW	A	kW	A			A			A
0.06	0.2	**0.06**	0.19	**–**	–	**LS1D32**	10 x 38	2	**LC1K06**	**LR2K0302**	0.16…0.23
–	–	**0.09**	0.28	**–**	–	**LS1D32**	10 x 38	2	**LC1K06**	**LR2K0303**	0.23…0.36
0.09 **0.12**	0.3 0.44	**–** **0.12**	– 0.37	**–** **–**	– –	**LS1D32**	10 x 38	2	**LC1K06**	**LR2K0304**	0.36…0.54
0.18 **–**	0.6 –	**0.18** **0.25**	0.55 0.76	**–** **–**	– –	**LS1D32**	10 x 38	2	**LC1K06**	**LR2K0305**	0.54…0.8
0.25 **0.37**	0.85 1.1	**–** **0.37**	– 1	**–** **0.37**	– 0.88	**LS1D32**	10 x 38	2	**LC1K06**	**LR2K0306**	0.8…1.2
0.55 **–**	1.5 –	**0.55** **0.75**	1.36 1.68	**0.55** **0.75**	1.2 1.5	**LS1D32**	10 x 38	2	**LC1K06**	**LR2K0307**	1.2…1.8
0.75 **1.1**	1.9 2.7	**–** **1.1**	– 2.37	**1.1** **1.5**	2.2 2.9	**LS1D32**	10 x 38	4	**LC1K06**	**LR2K0308**	1.8…2.6
1.5	3.6	**1.5**	3.06	**–**	–	**LS1D32**	10 x 38	4	**LC1K06**	**LR2K0310**	2.6…3.7
2.2 **–**	4.9 –	**–** **–**	– –	**2.2** **3**	3.9 5.2	**LS1D32**	10 x 38	6	**LC1K06**	**LR2K0312**	3.7…5.5
–	–	**2.2**	4.42	**–**	–	**LS1D32**	10 x 38	8	**LC1K06**	**LR2K0312**	3.7…5.5
3	6.5	**3**	5.77	**4**	6.8	**LS1D32**	10 x 38	8	**LC1K09**	**LR2K0314**	5.5…8
4	8.5	**4**	7.9	**5.5**	9.2	**LS1D32**	10 x 38	12	**LC1K09**	**LR2K0316**	8…11.5

(1) For breaking under load, add a rotary switch-disconnector.
(2) For reversing operation, replace the prefix LC1 with LC2.

Life Is On Schneider Electric

TeSys motor starters - open version

D.O.L starters with fuse protection (NF C or DIN fuses, type aM), contactor and thermal overload relay

0.06 to 55 kW at 400/415 V: type 1 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Fuse carrier [1] (basic block)	aM fuses		Contactor	Thermal overload relay classe 10	
400/415 V		440 V		500 V		Reference	Size	Rating	Reference [2]	Reference	Setting range
P	Ie	P	Ie	P	Ie						
kW	A	kW	A	kW	A			A			A
5.5	11.5	**5.5**	10.4	**7.5**	12.4	**LS1D32**	10 x 38	16	**LC1K12**	**LR2K0321**	10…14
7.5	15.5	**7.5**	13.7	**9**	13.9	**LS1D32**	10 x 38	16	**LC1D18**	**LRD21**	12…18
–	–	**9**	16.9	**–**	–	**LS1D32**	10 x 38	20	**LC1D25**	**LRD21**	12…18
9	18.1	**–**	–	**11**	17.6						
11	22	**11**	20.1	**15**	23	**GK1EK**	14 x 51	25	**LC1D25**	**LRD22**	16…24
15	29	**15**	26.5	**18.5**	28	**GK1EK**	14 x 51	32	**LC1D32**	**LRD32**	23…32
18.5	35	**18.5**	32.8	**22**	33	**GK1EK**	14 x 51	40	**LC1D40A**	**LRD340**	30…40
22	41	**22**	39	**30**	44	**GS●J**	22 x 58	50	**LC1D50A**	**LRD350**	37…50
–	–	**30**	51.5	**–**	–	**GS●J**	22 x 58	80	**LC1D50A**	**LRD365**	48…65
–	–	**–**	–	**37**	53	**GS●J**	22 x 58	80	**LC1D65A**	**LRD365**	48…65
30	55	**37**	64	**–**	–	**GS●J**	22 x 58	80	**LC1D65A**	**LRD365**	48…65
–	–	**–**	–	**45**	64	**GS●J**	22 x 58	80	**LC1D80**	**LRD3361**	55…70
37 [3]	66	**45**	76	**–**	–	**GS●J**	22 x 58	100	**LC1D80**	**LRD3363**	63…80
45	80	**–**	–	**55**	78	**GS●J**	22 x 58	100	**LC1D95**	**LRD3365**	80…93
–	–	**55**	90	**–**	–	**GS●J**	22 x 58	125	**LC1D115**	**LRD4365**	80…104
55	97	**–**	–	**75**	106	**GS●J**	22 x 58	125	**LC1D115**	**LRD4367**	95…120

(1) For breaking under load, add a rotary switch-disconnector.
(2) For reversing operation, replace the prefix LC1 with LC2.
(3) 400 V maximum.

TeSys motor starters - open version

D.O.L starters with fuse protection (NF C or DIN fuses, type aM), contactor and thermal overload relay

0.06 to 315 kW at 400/415 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Switch-disconnector	aM fuses		Contactor	Thermal overload relay classe 10	
400/415 V		440 V		500 V		Reference (1)	Size	Rating	Reference (2)	Reference	Setting range
P	Ie	P	Ie	P	Ie						
kW	A	kW	A	kW	A			A			A
0.06	0.2	0.06	0.19	–	–	GS1DD	10 x 38	2	LC1D09	LRD02	0.16…0.25
–	–	0.09	0.28	–	–	GS1DD	10 x 38	2	LC1D09	LRD03	0.25…0.4
0.09 0.12	0.3 0.44	– 0.12	– 0.37	– –	– –	GS1DD	10 x 38	2	LC1D09	LRD04	0.4…0.63
0.18 –	0.6 –	0.18 0.25	0.55 0.76	– –	– –	GS1DD	10 x 38	2	LC1D09	LRD05	0.63…1
0.25 0.37 0.55	0.85 1.1 1.5	– 0.37 0.55	– 1 1.36	0.37 0.55 0.75	0.88 1.2 1.5	GS1DD	10 x 38	2	LC1D09	LRD06	1…1.7
0.75 –	1.9 –	0.75 1.1	1.68 2.37	– 1.1	– 2.2	GS1DD	10 x 38	4	LC1D09	LRD07	1.6…2.5
1.1 1.5	2.7 3.6	– 1.5	– 3.06	1.5 2.2	2.9 3.9	GS1DD	10 x 38	4	LC1D09	LRD08	2.5…4
2.2	4.9	2.2	4.42	3	5.2	GS1DD	10 x 38	6	LC1D09	LRD10	4…6
3	6.5	3	5.77	4	6.8	GS1DD	10 x 38	8	LC1D09	LRD12	5.5…8
4	8.5	4	7.9	5.5	9.2	GS1DD	10 x 38	10	LC1D09	LRD14	7…10
5.5	11.5	5.5	10.4	7.5	12.4	GS1DD	10 x 38	16	LC1D12	LRD16	9…13
7.5	15.5	7.5	13.7	9	13.9	GS1DD	10 x 38	16	LC1D18	LRD21	12…18
–	–	9	16.9	–	–	GS●F	14 x 51	20	LC1D25	LRD21	12…18
9 11	18.1 22	11 –	20.1 –	11 15	17.6 23	GS●F	14 x 51	25	LC1D25	LRD22	16…24
15	29	15	26.5	18.5	28	GS●F	14 x 51	32	LC1D32	LRD32	23…32
18.5	35	18.5	32.8	22	33	GS●F	14 x 51	40	LC1D40A	LRD340	30…40
22	41	22	39	30	44	GS●J	22 x 58	50	LC1D50A	LRD350	37…50
–	–	30	51.5	–	–	GS●J	22 x 58	80	LC1D65A	LRD365	48…65
–	–	–	–	37	53	GS●J	22 x 58	80	LC1D65A	LRD365	48…65
30	55	37	64	–	–	GS●J	22 x 58	80	LC1D65A	LRD365	48…65
–	–	–	–	45	64	GS●J	22 x 58	80	LC1D95	LRD3361	55…70
37	66	45	76	–	–	GS●J	22 x 58	100	LC1D80	LRD3363	63…80
–	–	–	–	55	78	GS●J	22 x 58	100	LC1D115	LR9D5367	60…100
45	80	–	–	–	–	GS●J	22 x 58	100	LC1D95	LRD3365	80…93
55	97	55	90	75	106	GS●L	T0	125	LC1D150	LR9D5369	90…150
75	132	75	125	90	128	GS●L	T0	160	LC1D150	LR9D5369	90…150
90	160	90	146	110	156	GS●N	T1	200	LC1F185	LR9F5371	132…220
110	195	110	178	132	184	GS●N	T1	250	LC1F225	LR9F5371	132…220
132	230	132	215	160	224	GS●QQ	T2	315	LC1F265	LR9F7375	200…330
–	–	160	256	–	–	GS●QQ	T2	315	LC1F330	LR9F7375	200…330
160	280	200	321	200	280	GS●QQ	T2	400	LC1F330	LR9F7375	200…330
–	–	–	–	220	310	GS●QQ	T2	400	LC1F400	LR9F7375	200…330
200 220	350 388	– 220	– 353	– 250	– 344	GS2S	T3	500	LC1F400	LR9F7379	300…500
250	430	250	401	–	–	GS2S	T3	500	LC1F500	LR9F7379	300…500
– –	– –	– –	– –	315 355	432 488	GS2S	T3	630	LC1F500	LR9F7381	380…630
315	540	315	505	–	–	GS2S	T3	630	LC1F630	LR9F7381	380…630
– –	– –	355 400	549 611	– 400	– 552	GS2V	T4	800	LC1F630	LR9F7381	380…630

(1) GS●: GS1 for direct operator or GS2 for external operator.
(2) For reversing operation, replace the prefix LC1 with LC2.

Life Is On Schneider Electric

TeSys motor starters - open version

D.O.L starters with fuse protection (NF C or DIN fuses, type aM), contactor and thermal overload relay

0.75 to 400 kW at 690 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3		Switch-disconnector	aM fuses		Contactor	Thermal overload relay classe 10	
P	Ie	Reference (1)	Size	Rating	Reference (2)	Reference	Setting range
kW	A			A			A
0.75	1.1	**GS●F**	14 x 51	2	**LC1D09**	**LRD06**	1…1.6
1.1	1.6	**GS●F**	14 x 51	2	**LC1D09**	**LRD06**	1…1.6
1.5	2.1	**GS●F**	14 x 51	4	**LC1D09**	**LRD07**	1.6…2.5
2.2	2.8	**GS●F**	14 x 51	4	**LC1D09**	**LRD08**	2.5…4
3	3.8	**GS●F**	14 x 51	6	**LC1D09**	**LRD08**	2.5…4
4	4.9	**GS●F**	14 x 51	6	**LC1D09**	**LRD10**	4…6
5.5	6.7	**GS●F**	14 x 51	8	**LC1D09**	**LRD12**	5.5…8
7.5	8.9	**GS●F**	14 x 51	10	**LC1D25**	**LRD16**	9…13
11	12.8	**GS●F**	14 x 51	16	**LC1D25**	**LRD16**	9…13
15	17	**GS●F**	14 x 51	20	**LC1D25**	**LRD22**	16…24
18.5	21	**GS●F**	14 x 51	25	**LC1D32**	**LRD22**	16…24
22	24	**GS●J**	22 x 58	32	**LC1D40A**	**LRD332**	23…32
30	32	**GS●J**	22 x 58	40	**LC1D40A**	**LRD340**	30…40
37	39	**GS●J**	22 x 58	50	**LC1D65A**	**LRD350**	37…50
45	47	**GS●J**	22 x 58	63	**LC1D80**	**LRD3357**	37…50
55	57	**GS●J**	22 x 58	80	**LC1D115**	**LRD3359**	48…65
75	77	**GS●KK**	T00	100	**LC1D115**	**LRD3363**	63…80
90	93	**GS●KK**	T00	125	**LC1D150**	**LR9D5369**	90…150
110	113	**GS●KK**	T00	125	**LC1F185**	**LR9D5369**	90…150
132	134	**GS●L**	T0	160	**LC1F265**	**LR9F5371**	132…220
160	162	**GS●N**	T1	200	**LC1F265**	**LR9F5371**	132…220
200	203	**GS●N**	T1	250	**LC1F330**	**LR9F7375**	200…330
220	224	**GS●QQ**	T2	250	**LC1F400**	**LR9F7375**	200…330
250	250	**GS●QQ**	T2	315	**LC1F400**	**LR9F7375**	200…330
315	313	**GS●QQ**	T2	355	**LC1F500**	**LR9F7379**	300…500
355	354	**GS●QQ**	T2	400	**LC1F630**	**LR9F7379**	300…500
400	400	**GS2S**	T3	500	**LC1F630**	**LR9F7379**	300…500

(1) GS●: GS1 for direct operator or GS2 for external operator.
(2) For reversing operation, replace the prefix LC1 with LC2.

TeSys motor starters - open version

D.O.L starters with fuse protection (NF C or DIN fuses, type aM), contactor and electronic thermal overload relay

0.18 to 55 kW at 400/415 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Switch-disconnector	aM fuses		Contactor	Electronic thermal overload relay	
400/415 V			690 V			Reference	Size	Rating	Reference	Reference	Setting range
P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA			A			A
0.18	0.6	100	**–**	–	–	**GS1DD**	10 x 38	2	**LC1D09**	**LR9D02**	0.4…2.0
0.25	0.85	100	**–**	–	–	**GS1DD**	10 x 38	2	**LC1D09**	**LR9D02**	0.4…2.0
0.37	1.1	100	**–**	–	–	**GS1DD**	10 x 38	2	**LC1D09**	**LR9D02**	0.4…2.0
0.55	1.5	100	**–**	–	–	**GS1DD**	10 x 38	2	**LC1D09**	**LR9D02**	0.4…2.0
0.75	1.9	100	**–**	–	–	**GS1DD**	10 x 38	4	**LC1D09**	**LR9D02**	0.4…2.0
1.1	2.7	100	**–**	–	–	**GS1DD**	10 x 38	4	**LC1D18**	**LR9D08**	1.6…8.0
1.5	3.6	100	**–**	–	–	**GS1DD**	10 x 38	4	**LC1D18**	**LR9D08**	1.6…8.0
2.2	4.9	100	**–**	–	–	**GS1DD**	10 x 38	6	**LC1D18**	**LR9D08**	1.6…8.0
3	6.5	100	**–**	–	–	**GS1DD**	10 x 38	8	**LC1D18**	**LR9D32**	6.4…32
4	8.5	100	**–**	–	–	**GS1DD**	10 x 38	10	**LC1D18**	**LR9D32**	6.4…32
5.5	11.5	100	**–**	–	–	**GS1DD**	10 x 38	16	**LC1D25**	**LR9D32**	6.4…32
7.5	15.5	50	**–**	–	–	**GS1DD**	10 x 38	16	**LC1D25**	**LR9D32**	6.4…32
11	22	50	**–**	–	–	**GS●F**	14 x 51	25	**LC1D25**	**LR9D32**	6.4…32
15	29	50	**–**	–	–	**GS●J**	22 x 58	32	**LC1D65A**	**LR9D110S**	22…110
18.5	35	50	**–**	–	–	**GS●J**	22 x 58	40	**LC1D65A**	**LR9D110S**	22…110
22	41	50	**–**	–	–	**GS●J**	22 x 58	50	**LC1D65A**	**LR9D110S**	22…110
45 (1)	80	100	**–**	–	–	**GS●N**	T 1	100	**LC1D150**	**LR9D110S**	22…110
55 (1)	97	100	**–**	–	–	**GS●N**	T 1	125	**LC1D150**	**LR9D110S**	22…110
–	–	–	**0.37**	0.64	100	**GS●F**	14 x 51	2	**LC1D09**	**LR9D02**	0.4…2.0
–	–	–	**0.55**	0.87	100	**GS●F**	14 x 51	2	**LC1D09**	**LR9D02**	0.4…2.0
–	–	–	**0.75**	1.1	100	**GS●F**	14 x 51	2	**LC1D09**	**LR9D02**	0.4…2.0
–	–	–	**1.1**	1.6	100	**GS●F**	14 x 51	2	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**1.5**	2.1	100	**GS●F**	14 x 51	4	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**2.2**	2.8	100	**GS●F**	14 x 51	4	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**3**	4	100	**GS●F**	14 x 51	6	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**4**	5	100	**GS●F**	14 x 51	6	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**5.5**	7	50	**GS●F**	14 x 51	8	**LC1D25**	**LR9D32**	6.4…32
–	–	–	**7.5**	8.9	50	**GS●F**	14 x 51	10	**LC1D25**	**LR9D32**	6.4…32
–	–	–	**11**	13	50	**GS●F**	14 x 51	16	**LC1D32**	**LR9D32**	6.4…32
–	–	–	**15**	16.5	50	**GS●F**	14 x 51	20	**LC1D32**	**LR9D32**	6.4…32
–	–	–	**18.5**	21	100	**GS●F**	14 x 51	25	**LC1D95**	**LR9D32**	6.4…32
–	–	–	**18.5**	21	50	**GS●F**	14 x 51	25	**LC1D65A**	**LR9D32**	6.4…32
–	–	–	**22**	25	50	**GS●F**	14 x 51	32	**LC1D65A**	**LR9D32**	6.4…32
–	–	–	**30**	33	100	**GS●F**	14 x 51	40	**LC1D95**	**LR9D110**	22…110
–	–	–	**37**	40	100	**GS●F**	14 x 51	50	**LC1D95**	**LR9D110**	22…110
–	–	–	**45**	49	100	**GS●J**	22 x 58	63	**LC1D95**	**LR9D110**	22…110

(1) Ratings valid up to 400 V AC only.

Life Is On Schneider Electric

TeSys motor starters - open version

D.O.L. starters with fuse protection (BS fuses), contactor and thermal overload relay

0.06 to 375 kW at 415 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Switch-disconnector-fuse	BS fuses		Contactor	Thermal overload relay	
415 V		440 V		500 V		Reference	Size	Rating	Reference (1)	Reference	Setting range
P	Ie	P	Ie	P	Ie						
kW	A	kW	A	kW	kA			A			A
0.06	0.22	**0.06**	0.19	**–**	–	**GS1DDB**	A1	NIT 2	**LC1D09**	**LRD02**	0.16…0.25
–	–	**0.09**	0.28	**–**	–	**GS1DDB**	A1	NIT 2	**LC1D09**	**LRD03**	0.25…0.4
0.09 **0.12**	0.36 0.42	**–** **0.12**	– 0.37	**–** **–**	– –	**GS1DDB**	A1	NIT 2	**LC1D09**	**LRD04**	0.4…0.63
0.18	0.6	**0.18**	0.55	**–**	–	**GS1DDB**	A1	NIT 2	**LC1D09**	**LRD05**	0.63…1
–	–	**0.25**	0.76	**–**	–	**GS1DDB**	A1	NIT 4	**LC1D09**	**LRD05**	0.63…1
0.25 **0.37** **0.55**	0.88 1 1.5	**0.37** **0.55** **0.75**	1 1.36 1.68	**0.37** **0.55** **0.75**	1 1.2 1.5	**GS1DDB**	A1	NIT 6	**LC1D09**	**LRD06**	1…1.7
0.75	2	**–**	–	**–**	–	**GS1DDB**	A1	NIT 10	**LC1D09**	**LRD07**	1.6…2.5
–	–	**–**	–	**1.5**	2.6	**GS1DDB**	A1	NIT 10	**LC1D09**	**LRD08**	2.5…4
1.5	3.5	**1.5**	3.06	**2.2**	3.8	**GS1DDB**	A1	NIT 16	**LC1D09**	**LRD08**	2.5…4
2.2	5	**2.2**	4.42	**3**	5	**GS1DDB**	A1	NIT 16	**LC1D09**	**LRD10**	4…6
3	6.5	**3**	5.77	**4**	6.5	**GS1DDB**	A1	NIT 20	**LC1D09**	**LRD12**	5.5…8
4	8.4	**4**	7.9	**5.5**	9	**GS1DDB**	A1	NIT 20	**LC1D09**	**LRD14**	7…10
5.5	11	**5.5**	10.4	**7.5**	12	**GS1DDB**	A1	NIT 20M25	**LC1D12**	**LRD16**	9…13
7.5	14	**7.5**	13.7	**9**	13.9	**GS1DDB**	A1	NIT 20M32	**LC1D18**	**LRD21**	12…18
9	18.1	**9**	16.9	**–**	–	**GS2GB**	A2	TIA 32M35	**LC1D18**	**LRD21**	12…18
11 **–**	21 –	**11** **–**	20 –	**11** **15**	18.4 23	**GS2GB**	A2	TIA 32M50	**LC1D25**	**LRD22**	16…24
15	28.5	**15**	26.5	**–**	–	**GS2GB**	A2	TIA 32M63	**LC1D32**	**LRD32**	23…32
18.5	35	**18.5**	32.8	**–**	–	**GS2GB**	A3	TIS 63M80	**LC1D40A**	**LRD340**	25…40
22	41	**22**	39	**–**	–	**GS2GB**	A3	TIS 63M80	**LC1D50A**	**LRD350**	37…50
30	55	**30**	51.5	**–**	–	**GS2GB**	A3	TIS 63M100	**LC1D65A**	**LRD365**	48…65
–	–	**37**	64	**–**	–	**GS2GB**	A3	TIS 63M100	**LC1D65A**	**LRD365**	48…65
–	–	**45**	76	**45**	65	**GS2LLB**	A4	TCP 100M125	**LC1D80**	**LRD3363**	63…80
45	81	**–**	–	**55**	80	**GS2LLB**	A4	TCP 100M125	**LC1D95**	**LRD3365**	80…93
55	100	**–**	–	**–**	–	**GS2LLB**	A4	TCP 100M160	**LC1D115**	**LR9D5369**	90…150
–	–	**55**	90	**–**	–	**GS2LLB**	A4	TCP 100M160	**LC1D115**	**LR9D5367**	60…100
–	–	**–**	–	**80**	116	**GS2LB**	B2	TF 200	**LC1D150**	**LR9D5369**	90…150
80	138	**80**	132	**–**	–	**GS2LB**	B2	TF 200M250	**LC1D150**	**LR9D5369**	90…150
– **–**	– –	**–** **–**	– –	**100** **110**	143 156	**GS2LB**	B2	TF 200M250	**LC1F185**	**LR9F5371**	132…220
100	182	**100**	162	**–**	–	**GS2MMB**	B2	TF 200M250	**LC1F185**	**LR9F5371**	132…220
110	196	**110**	178	**–**	–	**GS2MMB**	B2	TF 200M315	**LC1F225**	**LR9F5371**	132…220
–	–	**–**	–	**140**	200	**GS2NB**	B3	TKF 315M355	**LC1F265**	**LR9F5371**	132…220
140	250	**140**	226	**160**	220	**GS2NB**	B3	TKF 315M355	**LC1F265**	**LR9F7375**	200…330
160	285	**160**	256	**–**	–	**GS2QQB**	B4	TKF 315M355	**LC1F330**	**LR9F7375**	200…330
–	–	**–**	–	**220**	310	**GS2QQB**	B4	TMF 400	**LC1F400**	**LR9F7379**	300…500
220	388	**220**	353	**257**	362	**GS2QQB**	B4	TMF 400M450	**LC1F400**	**LR9F7379**	300…500
–	–	**–**	–	**270**	380	**GS2SB**	C2	TTM 500	**LC1F500**	**LR9F7379**	300…500
257 **270**	450 460	**257** **270**	412 433	**–** **–**	– –	**GS2SB**	C2	TTM 500	**LC1F500**	**LR9F7381**	380…630
375 **–**	610 –	**375** **–**	577 –	**375** **425**	508 556	**GS2SB**	C2	TTM 630	**LC1F630**	**LR9F7381**	380…630

(1) For reversing operation, replace the prefix LC1 with LC2.

TeSys motor starters - open version

D.O.L. starters with circuit breaker and overload protection built into the circuit breaker

0.06 to 110 kW at 400/415 V: type 1 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Circuit breaker		Contactor
	400/415 V			440 V			500 V		Reference	Setting range of thermal trips	Reference (2)
P	Ie	Iq (1)	P	Ie	Iq (1)	P	Ie	Iq (1)			
kW	A	kA	kW	A	kA	kW	A	kA		A	
0.06	0.2	50	**0.06**	0.19	50	–	–	–	**GV2ME02**	0.16…0.25	**LC1K06** or **LC1D09**
0.09	0.3	50	**0.09**	0.28	50	–	–	–	**GV2ME03**	0.25…0.40	**LC1K06** or **LC1D09**
			0.12	0.37	50						
0.12	0.44	50	–	–	–	–	–	–	**GV2ME04**	0.40…0.63	**LC1K06** or **LC1D09**
0.18	0.6	50	**0.18**	0.55	50	–	–	–			
0.25	0.85	50	**0.25**	0.76	50				**GV2ME05**	0.63…1	**LC1K06** or **LC1D09**
0.37	1.1	50	**0.37**	0.99	50						
–	–	–	–	–	–	**0.37**	0.88	50	**GV2ME06**	1…1.6	**LC1K06** or **LC1D09**
0.55	1.5	50	**0.55**	1.36	50	**0.55**	1.2	50			
–	–	–	–	–	–	**0.75**	1.5	50	**GV2ME06**	1…1.6	**LC1K06** or **LC1D09**
0.75	1.9	50	**0.75**	1.68	50	–	–	–	**GV2ME07**	1.6….2.5	**LC1K06** or **LC1D09**
–	–	–	**1.1**	2.37	50	**1.1**	2.2	50			
1.1	2.7	50	–	–	–	**1.5**	2.9	50	**GV2ME08**	2.5…4	**LC1K06** or **LC1D09**
1.5	3.6	50	**1.5**	3.06	50	**2.2**	3.9	50			
2.2	4.9	50	**2.2**	4.42	50	–	–	–	**GV2ME10**	4…6.3	**LC1K06** or **LC1D09**
–	–	–	**3**	5.77	50	**3**	5.2	50			
3	6.5	50	–	–	–	**4**	6.8	10	**GV2ME14**	6…10	**LC1K09** or **LC1D09**
4	8.5	50	**4**	7.9	15	**5.5**	9.2	10			
5.5	11.5	15	**5.5**	10.4	8	**7.5**	12.4	6	**GV2ME16**	9…14	**LC1K12** or **LC1D12**
7.5	15.5	15	**7.5**	13.7	8	**9**	13.9	6	**GV2ME20**	13…18	**LC1D18**
–	–	–	**9**	16.9	8	–	–	–			
9	18.1	15	**11**	20.1	6	**11**	17.6	4	**GV2ME21**	17…23	**LC1D25**
11	22	15	–	–	–	**15**	23	4	**GV2ME22**	20…25	**LC1D25**
15	29	10	**15**	26.5	6	**18.5**	28	4	**GV2ME32**	24…32	**LC1D32**
18.5	35	50	**18.5**	32.8	50	**22**	33	10	**GV3P40**	30…40	**LC1D40A**
22	41	50	**22**	39	50	**30**	44	10	**GV3P50**	37…50	**LC1D50A**
30	55	50	**30**	51.5	50	**37**	53	10	**GV3P65**	48…65	**LC1D65A**
37	66	50	–	–	–	–	–	–	**GV3P73**	62...73	**LC1D80A**
–	–	–	**37**	64	70	**45**	64	30	**GV4P80**	40…80	**LC1D65A**
37	66	100	**45**	76	70	**55**	78	30	**GV4P80**	40…80	**LC1D80**
45	80	100	–	–	–	–	–	–	**GV4P115**	65...115	**LC1D95**
55	97	100	**55**	90	70	**75**	106	30	**GV4P115**	65...115	**LC1D115**
75	132	35	**75**	125	35	**90**	128	30	**GV7RE150**	90…150	**LC1D150**
–	–	–	**90**	146	35	–	–	–	**GV7RE150**	90…150	**LC1F185**
90	160	35	–	–	–	**110**	156	30	**GV7RE220**	132…220	**LC1F185**
–	–	–	–	–	–	**132**	184	30	**GV7RE220**	132…220	**LC1F265**
–	–	–	**110**	178	35	**160**	224	30			
110	195	35	**132**	215	35	–	–	–	**GV7RE220**	132…220	**LC1F225**

*(1) The breaking performance of circuit breakers **GV2 ME** can be increased by adding a current limiter **GV1 L3**, see page 24509/5.*
(2) For reversing operation, replace the prefix LC1 with LC2.

Life Is On Schneider Electric

TeSys motor starters - open version

D.O.L. starters with circuit breaker and overload protection built into the circuit breaker

0.06 to 110 kW at 400/415 V: type 2 coordination

Standard power ratings of 3-phase mot or s 50/60 Hz in categ or y AC-3									Circuit breaker		Contactor
400/415 V			440 V			500 V			Reference	Setting range of thermal trips	Reference (2)
P	Ie	Iq (1)	P	Ie	Iq (1)	P	Ie	Iq (1)			
kW	A	kA	kW	A	kA	kW	A	kA		A	
0.06	0.2	130	**0.06**	0.19	130	–	–	–	**GV2P02** or **GV2ME02**	0.16…0.25	**LC1D09**
–	–	–	**0.09**	0.28	130	–	–	–	**GV2P03** or **GV2ME03**	0.25…0.4	**LC1D09**
0.09	0.3	130	**0.12**	0.37	130	–	–	–			
0.12	0.44	130	–	–	–	–	–	–	**GV2P04** or **GV2ME04**	0.4…0.63	**LC1D09**
0.18	0.6	130	**0.18**	0.55	130	–	–	–			
0.25	0.85	130	**0.25**	0.76	130	–	–	–	**GV2P05** or **GV2ME05**	0.63…1	**LC1D09**
0.37	1.1	130	**0.37**	0.99	130	–	–	–			
–	–	–	–	–	–	**0.37**	0.88	130	**GV2P06** or **GV2ME06**	1…1.6	**LC1D09**
0.55	1.5	130	**0.55**	1.36	130	**0.55**	1.2	130			
–	–	–	–	–	–	**0.75**	1.5	130	**GV2P06** or **GV2ME06**	1…1.6	**LC1D09**
0.75	1.9	130	**0.75**	1.68	130	–	–	–	**GV2P07** or **GV2ME07**	1.6…2.5	**LC1D09**
–	–	–	**1.1**	2.37	130	**1.1**	2.2	130			
1.1	2.7	130	–	–	–	**1.5**	2.9	130	**GV2P08** or **GV2ME08**	2.5…4	**LC1D09**
1.5	3.6	130	**1.5**	3.06	130	**2.2**	3.9	130			
–	–	–	–	–	–	–	–	–	**GV2P10** or **GV2ME10**	4…6.3	**LC1D09**
2.2	4.9	130	–	–	–	–	–	–			
–	–	–	**2.2**	4.42	50	–	–	–	**GV2ME10**	4…6.3	**LC1D09**
–	–	–	**3**	5.77	50	**3**	5.2	50			
–	–	–	**2.2**	4.42	130	–	–	–	**GV2P10**	4…6.3	**LC1D09**
–	–	–	**3**	5.77	130	**3**	5.2	130			
3	6.5	130	–	–	–	–	–	–	**GV2P14** or **GV2ME14**	6…10	**LC1D09**
4	8.5	130	–	–	–	–	–	–			
–	–	–	**4**	7.9	15	**4**	6.8	10	**GV2ME14**	6…10	**LC1D09**
–	–	–	–	–	–	**5.5**	9.2	10			
–	–	–	–	–	–	**4**	6.8	50	**GV2P14**	6…10	**LC1D12**
–	–	–	**4**	7.9	130	**5.5**	9.2	50			
5.5	11.5	130	**5.5**	10.4	50 or 8	**7.5**	12.4	42 or 6	**GV2P16** or **GV2ME16**	9…14	**LC1D25**
–	–	–	**7.5**	13.7	50 or 8	**9**	13.9	42 or 6			
7.5	15.5	50 or 15	**9**	16.9	20 or 8	–	–	–	**GV2P20** or **GV2ME20**	13…18	**LC1D25**
9	18.1	50 or 15	**11**	20.1	20 or 8	**11**	17.6	10 or 6	**GV2P21** or **GV2ME21**	17…23	**LC1D25**
11	22	50 or 15	–	–	–	–	–	–	**GV2P22** or **GV2ME22**	20…25	**LC1D25**
–	–	–	–	–	–	**15**	23	10 or 6	**GV2P22**	20…25	**LC1D32**
15	29	50 or 10	**15**	26.5	20 or 6	**18.5**	28	10 or 4	**GV2P32** or **GV2ME32**	25…40	**LC1D32**
18.5	35	50	–	–	–	–	–	–	**GV3P40**	30…40	**LC1D50A**
–	–	–	**18.5**	32.8	50	**22**	33	10	**GV3P40**	30…40	**LC1D65A**
22	41	50	–	–	–	–	–	–	**GV3P50**	37…50	**LC1D50A**
–	–	–	**22**	39	50	**30**	44	10	**GV3P50**	37…50	**LC1D65A**
30	55	50	**30**	51.5	50	–	–	–	**GV3P65**	48…65	**LC1D65A**
–	–	–	–	–	–	**37**	53	10	**GV3P65**	48…65	**LC1D65A**
37	66	50	–	–	–	–	–	–	**GV3P73**	62...73	**LC1D80A**
–	–	–	**37**	64	70	–	–	–	**GV4P80**	40…80	**LC1D65A**
37	66	100	**45**	76	70	(3)	(3)	(3)	**GV4P80**	40…80	**LC1D80**
45	80	100	**55**	90	70	(3)	(3)	(3)	**GV4P115**	65 …115	**LC1D115/F115**
55	97	100	–	–	–	(3)	(3)	(3)			
55	97	70	**75**	125	65	–	–	–	**GV7RS150**	90…150	**LC1D150**
75	132	70	**90**	146	65	**90**	128	50			
90	160	70	**110**	178	65	**110**	156	50	**GV7RS220**	132…220	**LC1F185**
110	195	70	**132**	215	65	–	–	–	**GV7RS220**	132…220	**LC1F225**
–	–	–	–	–	–	**132**	184	50	**GV7RS220**	132…220	**LC1F265**
–	–	–	–	–	–	**160**	224	50			

*(1) The breaking perf or mance of circuit breakers **GV2 P** can be increased by adding a current limiter **GV1 L3**, see page 24509/5.*
*(2) Combinations with circuit breaker **GV2 ME** are type 2 co or dinated only at 400/415 V and 440 V.*
(3) Please consult your regional sales office.

TeSys motor starters - open version

D.O.L. starters with circuit breaker, contactor and thermal overload relay

0.06 to 250 kW at 400/415 V: type 1 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Circuit breaker			Contactor	Thermal overload relay	
400/415 V			440 V			500 V			Reference	Rating	Irm (1)	Reference (2)	Reference	Setting range
P	Ie	Iq	P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA	kW	A	kA		A	A			A
0.06	0.2	50	0.06	0.19	50	–	–	–	GV2LE03	0.4	5	LC1K06	LR2K0302	0.16…0.23
–	–	–	0.09	0.28	50	–	–	–	GV2LE03	0.4	5	LC1K06	LR2K0303	0.23…0.36
0.09	0.3	50	0.12	0.37	50	–	–	–	GV2LE03	0.4	5	LC1K06	LR2K0304	0.36…0.54
0.12	0.44	50				–	–	–	GV2LE04	0.63	8	LC1K06	LR2K0304	0.36…0.54
0.18	0.6	50	0.18	0.55	50	–	–	–	GV2LE04	0.63	8	LC1K06	LR2K0305	0.54…0.8
–	–	–	0.25	0.76	50	–	–	–	GV2LE05	1	13	LC1K06	LR2K0305	0.54…0.8
0.25 0.37	0.85 1.1	50 50	– 0.37	– 1	– 50	– 0.37	– 0.88	– 50	GV2LE05	1	13	LC1K06	LR2K0306	0.8…1.2
0.55 –	1.5 –	50 –	0.55 –	1.36 –	50 –	0.55 0.75	1.2 1.5	50 50	GV2LE06	1.6	22.5	LC1K06	LR2K0307	1.2…1.8
–	–	–	0.75	1.68	50	–	–	–	GV2LE07	2.5	33.5	LC1K06	LR2K0307	1.2…1.8
0.75 1.1	1.9 2.7	50 50	– 1.1	– 2.37	– 50	– 1.1	– 2.2	– 50	GV2LE07	2.5	33.5	LC1K06	LR2K0308	1.8…2.6
1. 5	3.6	50	1.5	3.06	50	1.5	2.9	50	GV2LE08	4	51	LC1K06	LR2K0310	2.6…3.7
–	–	–	–	–	–	2.2	3.9	50	GV2LE08	4	51	LC1K06	LR2K0312	3.7…5.5
2.2	4.9	50	2.2	4.4	50	3	5.2	50	GV2LE10	6.3	78	LC1K06	LR2K0312	3.7…5.5
–	–	–	3	5.77	50	–	–	–	GV2LE10	6.3	78	LC1K06	LR2K0314	5.5…8
–	–	–	4	7.9	15	–	–	–	GV2LE14	10	138	LC1K09	LR2K0314	5.5…8
3	6.5	50	–	–	–	4	6.8	10	GV2LE14	10	138	LC1K09	LR2K0314	5.5…8
4	8.5	50	–	–	–	–	–	–	GV2LE14	10	138	LC1K09	LR2K0316	8…11.5
5.5	11.5	15	5.5	10.4	8	7.5	12.4	6	GV2LE16	14	170	LC1K12	LR2K0321	10…14
–	–	–	7.5	13.7	8	9	13.9	6	GV2LE16	14	170	LC1D18	LRD21	12…18
7.5	15.5	15	9	16.9	8	–	–	–	GV2LE20	18	223	LC1D18	LRD21	12…18
9	18.1	15	–	–	–	11	17.6	4	GV2LE22	25	327	LC1D25	LRD22	16…24
11	22	15	11	20.1	6	15	23	4	GV2LE22	25	327	LC1D25	LRD22	16…24
15	29	10	15	26.5	6	18.5	28	4	GV2LE32	32	416	LC1D32	LRD32	23…32
18.5	35	50	18.5	32.5	50	22	33	10	GV3L40	40	560	LC1D40A	LRD340	30…40
22	41	50	22	39	50	30	44	10	GV3L50	50	700	LC1D50A	LRD350	37…50

(1) Irm: setting current of the magnetic trip.
(2) For reversing operation, replace the prefix LC1 with LC2.

Life Is On Schneider Electric

TeSys motor starters - open version

D.O.L. starters with circuit breaker, contactor and thermal overload relay

0.06 to 250 kW at 400/415 V: type 1 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Circuit breaker			Contactor	Thermal overload relay	
400/415 V			440 V			500 V			Reference	Rating	Irm (1)	Reference (2)	Reference	Setting range
P	Ie	Iq	P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA	kW	A	kA		A	A			A
30	55	50	30	51.5	50	37	53	10	GV3L65	65	910	LC1D65A	LRD365	48…65
–	–	–	37	64	50	37	53	10	GV3L65	65	910	LC1D65A	LRD365	48…65
–	–	–	–	–	–	45	64	50	GV3L65	65	910	LC1D80	LRD3361	48…65
37	66	50	–	–	–	–	–	–	GV3L73	73	1120	LC1D80A	LRD380	62...80
–	–	–	37	64	70	–	–	–	GV4L80	80	880	LC1D65A	LRD365	48…65
–	–	–	–	–	–	45	64	30	GV4L80	80	880	LC1D80	LRD3361	48…65
37	66	100	–	–	–	–	–	–	GV4L80	80	1040	LC1D80	LRD3361	48…65
–	–	–	45	76	70	55	78	30	GV4L80	80	1040	LC1D80	LRD3363	63…80
45	80	100	–	–	–	–	–	–	GV4L115	115	1380	LC1D95	LRD3365	80…104
–	–	–	–	–	–	75	106	30	GV4L115	115	1380	LC1D115	LRD4367	95…120
–	–	–	55	90	70	–	–	–	GV4L115	115	1380	LC1D115	LRD4365	80…104
55	97	100	–	–	–	–	–	–	GV4L115	115	1495	LC1D115	LRD4367	95…120
–	–	–	–	–	–	50	90	(3)	NSX100●MA (3)	100	1200	LC1D115	LRD4365	80…104
–	–	–	–	–	–	75	106	(3)	NSX160●MA (3)	150	1500	LC1D115	LRD4367	95…120
55	97	(3)	–	–	–	–	–	–	NSX160●MA (3)	150	1350	LC1D115	LRD4367	95…120
75	132	(3)	75	125	(3)	90	128	(3)	NSX160●MA (3)	150	1800	LC1D150	LRD4369	110…140
–	–	–	90	146	(3)	–	–	–	NSX160●MA (3)	150	1950	LC1F185	LR9F5371	132…220
90	160	(3)	–	–	–	110	156	(3)	NSX250●MA (3)	220	2200	LC1F185	LR9F5371	132…220
110	195	(3)	–	–	–	–	–	–	NSX250●MA (3)	220	2640	LC1F225	LR9F5371	132…220
–	–	–	110	178	(3)	–	–	–	NSX250●MA (3)	220	2420	LC1F225	LR9F5371	132…220
–	–	–	–	–	–	132	184	(3)	NSX250●MA (3)	220	2640	LC1F265	LR9F5371	132…220
–	–	–	132	215	(3)	–	–	–	NSX250●MA (3)	220	2860	LC1F265	LR9F5371	132…220
132	230	(3)	–	–	–	–	–	–	NSX400● + Micrologic 1.3M (3)	320	3200	LC1F265	LR9F7375	200…330
–	–	–	–	–	–	160	224	(3)	NSX400● + Micrologic 1.3M (3)	320	2860	LC1F265	LR9F7375	200…330
–	–	–	160	256	(3)	–	–	–	NSX400● + Micrologic 1.3M (3)	320	3520	LC1F330	LR9F7375	200…330
160	280	(3)	200	321	(3)	–	–	–	NSX400● + Micrologic 1.3M (3)	320	4160	LC1F330	LR9F7375	200…330
–	–	–	–	–	–	200	280	(3)	NSX400● + Micrologic 1.3M (3)	320	3840	LC1F330	LR9F7375	200…330
–	–	–	–	–	–	220	310	(3)	NSX400● + Micrologic 1.3M (3)	320	4160	LC1F400	LR9F7379	300…500
200	350	(3)	220	353	(3)	–	–	–	NSX400● + Micrologic 1.3M (3)	500	5000	LC1F400	LR9F7379	300…500
–	–	–	250	401	(3)	–	–	–	NSX630● + Micrologic 1.3M (3)	500	5550	LC1F400	LR9F7379	300…500
–	–	–	–	–	–	250	344	(3)	NSX630● + Micrologic 1.3M (3)	500	5000	LC1F400	LR9F7379	300…500
220	388	(3)	–	–	–	–	–	–	NSX630● + Micrologic 1.3M (3)	500	5500	LC1F400	LR9F7379	300…500
250	430	(3)	280	470	(3)	315	432	(3)	NSX630● + Micrologic 1.3M (3)	500	6000	LC1F500	LR9F7379	300…500
–	–	–	–	–	–	355	488	(3)	NSX630● + Micrologic 1.3M (3)	500	6500	LC1F500	LR9F7381	380…630

(1) Irm: setting current of the magnetic trip.
(2) For reversing operation, replace the prefix LC1 with LC2.
(3) Reference to be completed by replacing the ● with the breaking performance code:

Breaking performance Iq (kA)	NSX100●MA		NSX160●MA and NSX250●MA		NSX400● and NSX630●	
400/415 V	36	70	36	70	70	150
440 V	35	65	35	65	65	130
500 V	25	50	25	50	50	70
660/690 V	8	10	8	10	20	20
Code	F	H	F	H	H	L

TeSys motor starters - open version

D.O.L. starters with circuit breaker, contactor and thermal overload relay

0.06 to 250 kW at 400/415 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Circuit breaker			Contactor	Thermal overload relay	
400/415 V			440 V			500 V			Reference	Rating	Irm (1)	Reference (2)	Reference	Setting range
P	Ie	Iq	P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA	kW	A	kA		A	A			A
0.06	0.2	130	**0.06**	0.19	130	**–**	–	–	**GV2L03** or **LE03**	0.4	5	**LC1D09**	**LRD02**	0.16…0.25
0.09	0.3	130	**0.09**	0.28	130	**–**	–	–	**GV2L03** or **LE03**	0.4	5	**LC1D09**	**LRD03**	0.25…0.40
–	–	–	**0.12**	0.37	130	**–**	–	–						
0.12	0.44	130	**–**	–	–	**–**	–	–	**GV2L04** or **LE04**	0.63	8	**LC1D09**	**LRD04**	0.4…0.63
0.18	0.6	130	**0.18**	0.55	130	**–**	–	–						
0.25	0.85	130	**0.25**	0.76	130	**–**	–	–	**GV2L05** or **LE05**	1	13	**LC1D09**	**LRD05**	0.63…1
0.37	1.1	130	**0.37**	0.99	130	**–**	–	–						
–	–	–	**–**	–	–	**0.37**	0.88	130	**GV2L05** or **LE05**	1	13	**LC1D09**	**LRD06**	1…1.7
0.55	1.5	130	**–**	–	–	**0.55**	1.2	130	**GV2L06** or **LE06**	1.6	22.5	**LC1D09**	**LRD06**	1…1.7
–	–	–	**0.55**	1.36	130	**0.75**	1.5	130						
0.75	1.9	130	**0.75**	1.68	130	**1.1**	2.2	130	**GV2L07** or **LE07**	2.5	33.5	**LC1D09**	**LRD07**	1.6…2.5
1.1	2.7	130	**1.1**	2.37	130	**1.5**	2.9	130	**GV2L08** or **LE08**	4	51	**LC1D09**	**LRD08**	2.5…4
1.5	3.6	130	**–**	–	–	**2.2**	3.9	130						
–	–	–	**1.5**	3.06	130	**–**	–	–	**GV2L08** or **LE08**	4	51	**LC1D09**	**LRD10**	4…6
2.2	4.9	130	**–**	–	–	**–**	–	–	**GV2L10** or **LE10**	6.3	78	**LC1D09**	**LRD10**	4…6
–	–	–	**–**	–	–	**3**	5.2	13						
–	–	–	**2.2**	4.42	50	**–**	–	–	**GV2LE10**	6.3	78	**LC1D09**	**LRD10**	4…6
–	–	–	**3**	5.77	50	**3**	5.2	50						
–	–	–	**2.2**	4.42	130	**–**	–	–	**GV2L10**	6.3	78	**LC1D09**	**LRD10**	4…6
–	–	–	**3**	5.77	130	**3**	5.2	130						
3	6.5	130	**–**	–	–	**–**	–	–	**GV2L14** or **LE14**	10	10	**LC1D09**	**LRD12**	5.5…8
–	–	–	**–**	–	–	**4**	6.8	10	**GV2LE14**	10	138	**LC1D12**	**LRD12**	5.5…8
–	–	–	**–**	–	–	**4**	6.8	50	**GV2L14**	10	138	**LC1D12**	**LRD12**	5.5…8
4	8.5	130	**–**	–	–	**–**	–	–	**GV2L14** or **LE14**	10	138	**LC1D09**	**LRD14**	7…10
–	–	–	**4**	7.9	15	**–**	–	–	**GV2LE14**	10	138	**LC1D09**	**LRD14**	7…10
–	–	–	**4**	7.9	130	**–**	–	–	**GV2L14**	10	138	**LC1D09**	**LRD14**	7…10
–	–	–	**–**	–	–	**5.5**	9.2	10	**GV2LE14**	10	138	**LC1D09**	**LRD14**	7…10
–	–	–	**–**	–	–	**5.5**	9.2	50	**GV2L14**	10	138	**LC1D09**	**LRD14**	7…10
5.5	11.5	130	**5.5**	10.4	50	**7.5**	12.4	42	**GV2L16**	14	170	**LC1D25**	**LRD16**	9…13
–	–	–	**7.5**	13.7	50	**–**	–	–	**GV2L16**	14	170	**LC1D25**	**LRD21**	12…18
7.5	15.5	50	**9**	16.9	20	**9**	13.9	10	**GV2L20**	18	223	**LC1D25**	**LRD21**	12…18
9	18.1	50	**–**	–	–	**–**	–	–	**GV2L22**	25	327	**LC1D25**	**LRD22**	16…24
11	22	50	**11**	20.1	20	**–**	–	–						
–	–	–	**–**	–	–	**11**	17.6	10	**GV2L22**	25	327	**LC1D32**	**LRD22**	16…24
–	–	–	**–**	–	–	**15**	23	10						
15	29	50	**15**	26.5	50	**–**	–	–	**GV3L32**	32	448	**LC1D40A**	**LRD332**	23…32
–	–	–	**–**	–	–	**18.5**	28	10	**GV3L32**	32	448	**LC1D65A**	**LRD332**	23…32

(1) Irm: setting current of the magnetic trip.
(2) For reversing operation, replace the prefix LC1 with LC2.

Life Is On Schneider Electric

TeSys motor starters - open version

D.O.L. starters with circuit breaker, contactor and thermal overload relay

0.06 to 250 kW at 400/415 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3									Circuit breaker			Contactor	Thermal overload relay	
400/415 V			440 V			500 V			Reference	Rating	Irm (1)	Reference (2)	Reference	Setting range
P	Ie	Iq	P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA	kW	A	kA		A	A			A
18.5	35	50	–	–	–	–	–	–	**GV3L40**	40	560	**LC1D50A**	**LRD340**	30…40
–	–	–	**18.5**	32.5	50	–	–	–	**GV3L40**	40	560	**LC1D65A**	**LRD340**	30…40
22	41	50	–	–	–	–	–	–	**GV3L50**	50	700	**LC1D50A**	**LRD350**	37…50
–	–	–	**22**	39	50	**30**	44	10	**GV3L50**	50	700	**LC1D65A**	**LRD350**	37…50
30	55	50	**30**	51.5	50	**37**	53	10	**GV3L65**	65	910	**LC1D65A**	**LRD365**	48…65
37	66	50	–	–	–	–	–	–	**GV3L73**	73	1120	**LC1D80A**	**LRD380**	62...80
45	60	50	–	–	–	–	–	–	**GV3L80**	80	1120	**LC1D95**	**LRD3363**	63...80
–	–	–	**37**	64	70	–	–	–	**GV4L80**	80	880	**LC1D65A**	**LRD365**	48…65
37	66	100	**45**	76	70	(4)	(4)	(4)	**GV4L80**	80	1040	**LC1D80**	**LRD3363**	63…80
45	80	100	**55**	90	70	(4)	(4)	(4)	**GV4L115**	115	1380	**LC1D115** **LC1F115**	**LR9D5367** **LR9F5367**	60…100 60…100
55	97	100	–	–	–	(4)	(4)	(4)	**GV4L115**	115	1495	**LC1D115** **LC1F115**	**LR9D5369** **LR9F5369**	90…150 90…150
–	–	–	–	–	–	**55**	78	(3)	**NSX100●MA** (3)	100	1040	**LC1D80**	**LRD3363**	63…80
45	80	(3)	**55**	90	(3)	–	–	–	**NSX100●MA** (3)	100	1300	**LC1D115**	**LR9D5367**	60…100
55	97	(3)	–	–	–	–	–	–	**NSX160●MA** (3)	150	1500	**LC1D115**	**LR9D5369**	90…150
–	–	–	–	–	–	**75**	106	(3)	**NSX160●MA** (3)	150	1950	**LC1D115**	**LR9D5369**	90…150
75	132	(3)	**75**	125	(3)	–	–	–	**NSX160●MA** (3)	150	1950	**LC1D150**	**LR9D5369**	90…150
–	–	–	**90**	146	(3)	–	–	–	**NSX160●MA** (3)	150	1950	**LC1D150**	**LR9D5369**	90…150
–	–	–	–	–	–	**90**	128	(3)	**NSX160●MA** (3)	150	1200	**LC1D150**	**LR9D5369**	90…150
90	160	(3)	**110**	178	(3)	–	–	–	**NSX250●MA** (3)	220	2420	**LC1F185**	**LR9F5371**	132…220
–	–	–	–	–	–	**110**	156	(3)	**NSX250●MA** (3)	220	1540	**LC1F185**	**LR9F5371**	132…220
110	195	(3)	–	–	–	–	–	–	**NSX250●MA** (3)	220	2860	**LC1F225**	**LR9F5371**	132…220
–	–	–	**132**	215	(3)	**132**	184	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	3500	**LC1F265**	**LR9F5371**	132…220
132	230	(3)	**160**	256	(3)	–	–	–	**NSX400●** + **Micrologic 1.3M** (3)	320	3520	**LC1F265**	**LR9F7375**	200…330
–	–	–	–	–	–	**160**	224	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	2200	**LC1F265**	**LR9F7375**	200…330
160	280	(3)	–	–	–	–	–	–	**NSX400●** + **Micrologic 1.3M** (3)	320	4000	**LC1F330**	**LR9F7375**	200…330
–	–	–	**200**	321	(3)	–	–	–	**NSX400●** + **Micrologic 1.3M** (3)	320	4000	**LC1F330**	**LR9F7379**	300…500
–	–	–	–	–	–	**200**	280	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	3500	**LC1F400**	**LR9F7375**	200…330
–	–	–	–	–	–	**220**	310	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	3500	**LC1F400**	**LR9F7379**	300…500
– **200**	– 350	– (3)	**220** **250**	353 401	(3) (3)	– –	– –	– –	**NSX630●** + **Micrologic 1.3M** (3)	500	5500	**LC1F400**	**LR9F7379**	300…500
– –	– –	– –	– –	– –	– –	**250** **315**	344 432	(3) (3)	**NSX630●** + **Micrologic 1.3M** (3)	500	4500	**LC1F500**	**LR9F7379**	300…500
220 **250**	388 430	(3) (3)	– –	– –	– –	– –	– –	– –	**NSX630●** + **Micrologic 1.3M** (3)	500	6250	**LC1F500**	**LR9F7379**	300…500
–	–	–	–	–	–	**355**	488	(3)	**NSX630●** + **Micrologic 1.3M** (3)	500	5000	**LC1F630**	**LR9F7381**	380…630

(1) Irm: setting current of the magnetic trip.
(2) For reversing operation, replace the prefix LC1 with LC2.
(3) Reference to be completed by replacing the ● with the breaking performance code:

Breaking performance Iq (kA)	NSX100●MA		NSX160●MA and NSX250●MA		NSX400● and NSX630●	
400/415 V	36	70	36	70	70	150
440 V	35	65	35	65	65	130
500 V	25	50	25	50	50	70
660/690 V	8	10	8	10	20	20
Code	**F**	**H**	**F**	**H**	**H**	**L**

(4) Please consult your regional sales office.

TeSys motor starters - open version

D.O.L. starters with circuit breaker, contactor and electronic thermal overload relay

0.06 to 30 kW at 400/415 V: type 2 coordination

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Circuit breaker			Contactor	Electronic thermal overload relay	
400/415 V			690 V			Reference	Rating	Irm	Reference	Reference	Setting range
P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA		A	A			A
0.06	0.2	100	**–**	–	–	**GV2L03**	0.4	5	**LC1D09**	**LR9D01**	0.1…0.5
0.09	0.3	100	**–**	–	–	**GV2L03**	0.4	5	**LC1D09**	**LR9D01**	0.1…0.5
0.12	0.44	100	**–**	–	–	**GV2L04**	0.63	8	**LC1D18**	**LR9D02**	0.4…2.0
0.18	0.6	100	**–**	–	–	**GV2L04**	0.63	8	**LC1D18**	**LR9D02**	0.4…2.0
0.25	0.85	100	**–**	–	–	**GV2L05**	1	13	**LC1D18**	**LR9D02**	0.4…2.0
0.37	1.1	100	**–**	–	–	**GV2L05**	1	13	**LC1D18**	**LR9D02**	0.4…2.0
0.55	1.5	100	**–**	–	–	**GV2L06**	1.6	22.5	**LC1D18**	**LR9D02**	0.4…2.0
0.75	1.9	100	**–**	–	–	**GV2L07**	2.5	33.5	**LC1D18**	**LR9D08**	1.6…8.0
1.1	2.7	100	**–**	–	–	**GV2L08**	4	51	**LC1D18**	**LR9D08**	1.6…8.0
1.5	3.6	100	**–**	–	–	**GV2L08**	4	51	**LC1D18**	**LR9D08**	1.6…8.0
2.2	4.9	100	**–**	–	–	**GV2L10**	6.3	78	**LC1D18**	**LR9D08**	1.6…8.0
3	6.5	100	**–**	–	–	**GV2L14**	10	138	**LC1D25**	**LR9D32**	6.4…32
4	8.5	100	**–**	–	–	**GV2L14**	10	138	**LC1D25**	**LR9D32**	6.4…32
5.5	11.5	100	**–**	–	–	**GV2L16**	14	170	**LC1D25**	**LR9D32**	6.4…32
7.5	15.5	50	**–**	–	–	**GV2L20**	18	223	**LC1D25**	**LR9D32**	6.4…32
11	22	50	**–**	–	–	**GV2L22**	25	327	**LC1D25**	**LR9D32**	6.4…32
15	29	50	**–**	–	–	**GV3L32**	40	448	**LC1D65A**	**LR9D110S**	22…110
18.5	35	50	**–**	–	–	**GV3L40**	40	560	**LC1D65A**	**LR9D110S**	22…110
22	41	50	**–**	–	–	**GV3L50**	50	700	**LC1D65A**	**LR9D110S**	22…110
30	55	50	**–**	–	–	**GV3L65**	65	910	**LC1D65A**	**LR9D110S**	22…110
–	–	–	**0.37**	0.64	50	**GV2L05**	1	13	**LC1D09**	**LR9D02**	0.4…2.0
–	–	–	**0.55**	0.87	50	**GV2L05**	1	13	**LC1D09**	**LR9D02**	0.4…2.0
–	–	–	**0.75**	1.1	50	**GV2L06**	1.6	22.5	**LC1D09**	**LR9D02**	0.4…2.0
–	–	–	**1.1**	1.6	50	**GV2L07 + LA9LB920**	2.5	33.5	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**1.5**	2.1	50	**GV2L07 + LA9LB920**	2.5	33.5	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**2.2**	2.8	50	**GV2L08 + LA9LB920**	4	51	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**3**	4	50	**GV2L08 + LA9LB920**	4	51	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**4**	5	50	**GV2L10 + LA9LB920**	6.3	78	**LC1D25**	**LR9D08**	1.6…8.0
–	–	–	**5.5**	7	50	**GV2L14 + LA9LB920**	10	138	**LC1D25**	**LR9D32**	6.4…32
–	–	–	**7.5**	8.9	50	**GV2L14 + LA9LB920**	10	138	**LC1D25**	**LR9D32**	6.4…32
–	–	–	**11**	13	3	**GV3L18+ LA9LB920**	14	252	**LC1D32**	**LR9D32**	6.4…32
–	–	–	**15**	16.5	3	**GV2L22 + LA9LB920**	18	327	**LC1D32**	**LR9D32**	6.4…32
–	–	–	**18.5**	21	3	**GV3L25 + LA9LB920**	25	350	**LC1D65A**	**LR9D32**	6.4…32
–	**–**	**–**	**22**	25	3	**GV2L32 + LA9LB920**	32	416	**LC1D65A**	**LR9D32**	6.4…32

Life Is On Schneider Electric

TeSys motor starters - open version

Star-delta starters with fuse protection (NF C or DIN fuses), contactor and thermal overload relay

1.5 to 315 kW at 400/415 V: type 1 coordination

Maximum operating rate: LC3 K and LC3 F: 12 starts/hour; LC3 D: 30 starts/hour.
Maximum starting time: LC3 K and LC3 D: 30 seconds; LC3 F: 20 seconds.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3								Fuse carrier (basic block)	aM fuses		Star-delta contactors	Thermal overload relay	
400/415 V				440 V				Reference	Size	Rating	Reference	Reference	Setting range
P	Ie	IrD (1)	Iq	P	Ie	IrD (1)	Iq						
kW	A	A	kA	kW	A	A	kA			A			A
1.5	3.5	2	50	1.5	3.06	2	50	LS1D32	10 x 38	4	LC3K06	LR2K0308	1.8…2.6
2.2	5	3	50	–	–	–	–	LS1D32	10 x 38	6	LC3K06	LR2K0310	2.6…3.7
–	–	–	–	2.2	4.42	3	50						
–	–	–	–	3	5.77	3	50	LS1D32	10 x 38	8	LC3K06	LR2K0310	2.6…3.7
3	6.5	4	50	–	–	–	–	LS1D32	10 x 38	8	LC3K06	LR2K0312	3.7…5.5
4	8.4	5	50	4	7.9	5	50	LS1D32	10 x 38	12	LC3K06	LR2K0312	3.7…5.5
5.5	11	6	50	5.5	10.4	6	50	LS1D32	10 x 38	16	LC3K06	LR2K0314	5.5…8
7.5	14.8	9	50	7.5	13.7	8	50	LS1D32	10 x 38	16	LC3K09	LR2K0316	8…11.5
9	18.1	10	100	9	16.9	10	50	LS1D32	10 x 38	20	LC3D12A	LRD16	9…13
11	21	12	100	11	20.1	12	100	GK1EK	14 x 51	25	LC3D12A	LRD16	9…13
15	28.5	16	100	15	26.5	15	100	GK1EK	14 x 51	32	LC3D18A	LRD21	12…18
18.5	35	20	100	18.5	32.8	19	100	GK1EK	14 x 51	40	LC3D18A	LRD22	16…24
–	–	–	–	22	39	23	100	GS●J	22 x 58	50	LC3D18A	LRD22	16…24
22	42	24	100	–	–	–	–	GS●J	22 x 58	50	LC3D32A	LRD32	23…32
–	–	–	–	30	51.5	30	100	GS●J	22 x 58	63	LC3D32A	LRD32	23…32
30	57	33	100	37	64	37	100	GS●J	22 x 58	80	3 x LC1D40A	LRD340	30…40
37	69	40	100	–	–	–	–	GS●J	22 x 58	80	3 x LC1D40A	LRD350	37…50
–	–	–	–	45	76	44	100	GS●J	22 x 58	80	3 x LC1D50A	LRD350	37…50
45	81	47	100	–	–	–	–	GS●J	22 x 58	100	3 x LC1D50A	LRD350	37…50
–	–	–	–	55	90	52	100	GS●K	22 x 58	100	3 x LC1D50A	LRD365	48…65
55	100	58	100	–	–	–	–	GS●K	22 x 58	125	3 x LC1D65A	LRD365	48…65
75	135	78	100	75	125	72	100	GS●L	T0	160	LC3D80	LRD3363	63…80
–	–	–	–	90	146	84	100	GS●L	T0	160	LC3D115	LRD4365	80…104
90	165	95	100	–	–	–	–	GS●N	T1	200	LC3D115	LRD4367	95…120
110	200	115	100	110	178	103	100	GS●N	T1	200	LC3D115	LRD4367	95…120
132	240	139	100	132	215	124	100	GS●QQ	T2	250	LC3D150	LRD4369	110…140
160	285	165	100	160	256	148	100	GS●QQ	T2	315	LC3F185	LR9F5371	132…220
–	–	–	–	200	321	185	100	GS●QQ	T2	400	LC3F225	LR9F5369	132…220
220	388	225	100	–	–	–	–	GS●QQ	T2	400	LC3F265	LR9F7375	200…330
–	–	–	–	250	401	233	100	GS2S	T3	500	LC3F265	LR9F7375	200…330
280	480	278	100	–	–	–	–	GS2S	T3	500	LC3F330	LR9F7375	200…330
–	–	–	–	315	505	293	100						
315	555	322	100	355	518	300	100	GS2S	T3	630	LC3F330	LR9F7375	200…330
–	–	–	–	375	575	334	100	GS2S	T3	630	LC3F400	LR9F7379	300…500

(1) IrD: current in the motor windings in delta connection.

TeSys motor starters - open version

Star-delta starters with fuse protection (NF C or DIN fuses), contactors and thermal overload relay

1.5 to 355 kW at 400/415 V: type 2 coordination

Maximum operating rate: LC1 D: 30 starts/hour; LC1 F: 12 starts/hour.
Maximum starting time: LC1 D: 30 seconds; LC1 F: 20 seconds.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Switch-disconnector-fuse	aM fuses		Star-delta contactors	Thermal overload relay	
400/415 V			440 V			Reference	Size	Rating	Reference	Reference	Setting range
P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA			A			A
1.5	3.5	50	**1.5**	3.06	50	**GS1DD**	10 x 38	4	3 x **LC1D09**	**LRD08**	2.5…4
2.2	5	50	**2.2**	4.42	50	**GS1DD**	10 x 38	6	3 x **LC1D09**	**LRD10**	4…6
3	6.5	50	**3**	5.77	50	**GS1DD**	10 x 38	8	3 x **LC1D09**	**LRD12**	5.5…8
4	8.4	50	**4**	7.9	50	**GS1DD**	10 x 38	10	3 x **LC1D09**	**LRD14**	7…10
5.5	11	50	**5.5**	10.4	50	**GS1DD**	10 x 38	16	3 x **LC1D12**	**LRD16**	9…13
7.5	14.8	50	**7.5**	13.7	50	**GS1DD**	10 x 38	16	3 x **LC1D18**	**LRD21**	12…18
9	18.1	100	**9**	16.9	100						
11	21	100	**11**	20.1	100	**GS●F**	14 x 51	25	3 x **LC1D25**	**LRD22**	16…24
15	28.5	100	**15**	26.5	100	**GS●F**	14 x 51	32	3 x **LC1D32**	**LRD32**	23…32
18.5	35	100	**18.5**	32.8	100	**GS●F**	14 x 51	40	3 x **LC1D40A**	**LRD340**	30…40
22	42	100	**22**	39	100	**GS●J**	22 x 58	50	3 x **LC1D50A**	**LRD350**	37…50
30	57	100	**30**	51.5	100	**GS●J**	22 x 58	80	3 x **LC1D65A**	**LRD365**	48…65
37	69	100	**37**	64	100	**GS●J**	22 x 58	80	3 x **LC1D80**	**LRD3363**	63…80
–	–	–	**45**	76	100	**GS●J**	22 x 58	80	3 x **LC1D80**	**LRD3365**	80…93
45	81	100	–	–	–	**GS●J**	22 x 58	100	3 x **LC1D115**	**LR9D5367**	60…100
–	–	–	**55**	90	100	**GS●L**	T0	125	3 x **LC1D115**	**LR9D5369**	90…150
55	100	100	–	–	–	**GS●L**	T0	125	3 x **LC1D150**	**LR9D5369**	90…150
–	–	–	**75**	125	100	**GS●L**	T0	160	3 x **LC1D150**	**LR9D5369**	90…150
75	135	100	–	–	–	**GS●L**	T0	160	3 x **LC1F185**	**LR9D5369**	90…150
90	165	100	**90**	146	100	**GS●N**	T1	200	3 x **LC1F185**	**LR9F5371**	132…220
110	200	100	**110**	178	100	**GS●N**	T1	250	3 x **LC1F225**	**LR9F5371**	132…220
132	240	100	**132**	215	100	**GS●QQ**	T2	315	3 x **LC1F265**	**LR9F7375**	200…330
160	285	100	**160**	256	100	**GS●QQ**	T2	400	3 x **LC1F330**	**LR9F7375**	200…330
–	–	–	**200**	321	100	**GS●QQ**	T2	400	3 x **LC1F330**	**LR9F7379**	300…500
200	352	100	**220**	353	100						
220	388	100	**250**	401	100	**GS2S**	T3	500	3 x **LC1F400**	**LR9F7379**	300…500
250	437	100	–	–	–	**GS2S**	T3	500	3 x **LC1F500**	**LR9F7379**	300…500
315	555	100	**315**	505	100	**GS2S**	T3	630	3 x **LC1F630**	**LR9F7381**	380…630
–	–	–	**355**	549	100						
–	–	–	**400**	611	100	**GS2V**	T4	800	3 x **LC1F630**	**LR9F7381**	380…630
355	605	100	–	–	–	**GS2V**	T4	800	3 x **LC1F780**	**LR9F7381**	380…630

Life Is On Schneider Electric

TeSys motor starters - open version

Star-delta starters with fuse protection (BS fuses), contactors and thermal overload relay

1.5 to 375 kW at 415 V: type 2 coordination

Maximum operating rate: LC1 D: 30 starts/hour; LC1 F: 12 starts/hour.
Maximum starting time: LC1 D: 30 seconds; LC1 F: 20 seconds.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Switch-disconnector-fuse	BS fuses		Star-delta contactors	Thermal overload relay	
415 V			440 V			Reference	Size	Rating	Reference	Reference	Setting range
P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA			A			A
1.5	3.5	50	**1.5**	3.06	50	**GS1DDB**	A1	NIT 16	3 x **LC1D09**	**LRD08**	2.5…4
2.2	5	50	**2.2**	4.42	50	**GS1DDB**	A1	NIT 16	3 x **LC1D09**	**LRD10**	4…6
3	6.5	50	**3**	5.77	50	**GS1DDB**	A1	NIT 20	3 x **LC1D09**	**LRD12**	5.5…8
4	8.4	50	**4**	7.9	50	**GS1DDB**	A1	NIT 20	3 x **LC1D09**	**LRD14**	7…10
5.5	11	50	**5.5**	10.4	50	**GS1DDB**	A1	NIT 20M25	3 x **LC1D12**	**LRD16**	9…13
7.5	14.8	50	**7.5**	13.7	50	**GS1DDB**	A1	NIT 20M32	3 x **LC1D18**	**LRD21**	12…18
9	18.1	50	**9**	16.9	50	**GS2GB**	A2	TIA 32M35	3 x **LC1D18**	**LRD21**	12…18
11	21	50	**11**	20.1	50	**GS2GB**	A2	TIA 32M50	3 x **LC1D25**	**LRD22**	16…24
15	28.5	50	**15**	26.5	50	**GS2GB**	A2	TIA 32M63	3 x **LC1D32**	**LRD32**	23…32
22	42	50	**22**	39	50	**GS2GB**	A3	TIS 63M80	3 x **LC1D50A**	**LRD350**	37…50
–	–	–	**30**	51.5	50	**GS2GB**	A3	TIS 63M100	3 x **LC1D65A**	**LRD365**	48…65
30	57	50	**–**	–	–	**GS2GB**	A3	TIS 63M100	3 x **LC1D65A**	**LRD365**	48…65
45	81	50	**45**	76	50	**GS2LLB**	A4	TCP 100M125	3 x **LC1D80**	**LRD3363**	63…80
55	100	80	**55**	90	80	**GS2LLB**	A4	TCP 100M160	3 x **LC1D115**	**LR9D5369**	90…150
80	138	80	**80**	132	80	**GS2LB**	B2	TF 200M250	3 x **LC1D150**	**LR9D5369**	90…150
100	182	80	**100**	162	80	**GS2MMB**	B2	TF 200M250	3 x **LC1F185**	**LR9F5371**	132…220
110	196	80	**110**	178	80	**GS2MMB**	B2	TF 200M315	3 x **LC1F225**	**LR9F5371**	132…220
140	250	80	**140**	226	80	**GS2NB**	B3	TFK 315M355	3 x **LC1F265**	**LR9F7375**	200…330
160	285	80	**160**	256	80	**GS2QQB**	B3	TFK 315M355	3 x **LC1F330**	**LR9F7375**	200…330
220	388	80	**220**	353	80	**GS2QQB**	B4	TMF 400M450	3 x **LC1F400**	**LR9F7379**	300…500
257 **270**	450 460	80 80	**257** **270**	412 433	80 80	**GS2SB**	C2	TTM 500	3 x **LC1F500**	**LR9F7379**	300…500
375	610	80	**375**	577	80	**GS2SB**	C2	TTM 630	3 x **LC1F630**	**LR9F7381**	380…630

TeSys motor starters - open version

Star-delta starters with circuit breaker and overload protection built into the circuit breaker

1.5 to 110 kW at 400/415 V: type 1 coordination

Maximum operating rate: LC3 K: 12 starts/hour; LC3 D: 30 starts/hour.
Maximum starting time: 30 seconds.

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3								Circuit breaker		Star-delta contactors
400/415 V				440 V				Reference	Setting range of thermal trips	Reference
P	Ie	IrD (1)	Iq (2)	P	Ie	IrD (1)	Iq (2)			
kW	A	A	kA	kW	A	A	kA		A	
1.5	3.6	2	50	**1.5**	3.06	1.8	50	**GV2ME08**	2.5…4	**LC3K06**
2.2	4.9	2.9	50	**2.2**	4.42	2.6	50	**GV2ME10**	4…6.3	**LC3K06**
–	–	–	–	**3**	5.77	3.3	50			
3	6.5	3.8	50	–	–	–	–	**GV2ME14**	6…10	**LC3K06**
4	8.5	4.9	50	**4**	7.9	4.6	15			
5.5	11.5	6.4	15	**5.5**	10.4	6	8	**GV2ME16**	9…14	**LC3K06**
7.5	15.5	8.6	15	**7.5**	13.7	7.9	8	**GV2ME20**	13…18	**LC3K09**
–	–	–	–	**9**	16.9	9.8	8	**GV2ME20**	13…18	**LC3D12A**
9	18.1	10	15	**11**	20.1	12	6	**GV2ME21**	17…23	**LC3D12A**
11	22	12	15	–	–	–	–	**GV2ME22**	20…25	**LC3D12A**
15	29	17	10	**15**	26.5	15	6	**GV2ME32**	24…32	**LC3D18A**
18.5	35	20	50	**18.5**	32.8	19	50	**GV3P40**	30…40	**LC3D18A**
–	–	–	–	**22**	39	23	50	**GV3P50**	37…50	**LC3D32A**
22	41	24	50	**30**	51.5	30	50	**GV3P50**	37…50	**LC3D32A**
30	55	33	50	**30**	51.5	30	50	**GV3P65**	48…65	**LC3D32A**
37	66	40	50	**37**	64	37	50	**GV3P65**	48…65	3 x **LC1D40A** (3)
37	66	40	100	**37**	64	37	70	**GV4P80**	40…80	3 x **LC1D40A** (3)
–	–	–	–	**45**	76	44	70	**GV4P80**	40…80	2 x **LC1D50A** +1 x **LC1D40A** (3)
45	80	47	100	–	–	–	–	**GV4P115**	65…115	2 x **LC1D50A** +1 x **LC1D40A** (3)
55	97	58	100	**55**	90	52	70	**GV4P115**	65…115	2 x **LC1D65A** +1 x **LC1D40A** (3)
75	132	78	35	**75**	125	72	35	**GV7RE150**	90…150	**LC3D80**
–	–	–	–	**90**	146	84	35	**GV7RE150**	90…150	**LC3D115**
90	160	95	35	**110**	178	103	35	**GV7RE220**	132…220	**LC3D115**
110	195	115	35							
–	–	–	–	**132**	215	124	35	**GV7RE220**	132…220	**LC3D150**

(1) IrD: current in the motor windings in delta connection.
*(2) The breaking performance of circuit breakers **GV2 ME** can be increased by adding a current limiter **GV1 L3**, see page B6/23.*
*(3) For mounting 3 contactors **LC1 D●●A**, star-delta starter kit **LAD 9SD3** must be ordered separately, see page B8/31.*

TeSys motor starters - open version

Star-delta starters with circuit breaker and overload protection built into the circuit breaker

1.5 to 110 kW at 400/415 V: type 2 coordination

Maximum operating rate: LC1 D: 30 starts/hour; LC1 F: 12 starts/hour.
Maximum starting time: LC1 D: 30 seconds; LC1 F: 20 seconds.

Standard power ratings of 3-phase motors 50-60 Hz in category AC-3						Circuit breaker		Star-delta contactors
400/415 V			440 V			Reference	Setting range of thermal trips	Reference
P	Ie	Iq	P	Ie	Iq (1)			
kW	A	kA	kW	A	kA		A	
1.5	3.6	130	**1.5**	3.06	130	**GV2P08**	2.5…4	3 x **LC1D09** (2)
2.2	4.9	130	**2.2**	4.42	130	**GV2P10**	4…6.3	3 x **LC1D18** (3)
–	–	–	**3**	5.77	130	**GV2P10**	4...6.3	3 x **LC1D18** (3)
3	6.5	130	–	–	–	**GV2P14**	6…10	3 x **LC1D18** (3)
4	8.5	130	**4**	7.9	130	**GV2P14**	6…10	3 x **LC1D18** (3)
5.5	11.5	130	**5.5**	10.4	50	**GV2P16**	9…14	3 x **LC1D25** (3)
–	–	–	**7.5**	13.7	50	**GV2P16**	9…14	3 x **LC1D25** (3)
7.5	15.5	50	**9**	16.9	20	**GV2P20**	13…18	3 x **LC1D25** (3)
9	18.1	50	**11**	20.1	20	**GV2P21**	17…23	3 x **LC1D25** (3)
11	22	50	–	–	–	**GV2P22**	20…25	3 x **LC1D25** (3)
15	29	50	**15**	26.5	50	**GV3P32**	23…32	3 x **LC1D40A** (4)
18.5	35	50	–	–	–	**GV3P40**	30…40	2 x **LC1D50A** +1 x **LC1D40A** (3)
–	–	–	**18.5**	32.8	50	**GV3P40**	30…40	2 x **LC1D65A** +1 x **LC1D40A** (4)
22	41	50	–	–	–	**GV3P50**	37…50	2 x **LC1D50A** +1 x **LC1D40A** (3)
–	–	–	**22**	39	50	**GV3P50**	37…50	2 x **LC1D65A** +1 x **LC1D40A** (4)
30	55	50	**30**	51.5	50	**GV3P65**	48…65	2 x **LC1D65A** +1 x **LC1D40A** (4)
37	66	100	**45**	76	70	**GV4P80**	40…80	3 x **LC1D80** (5)
–	–	–	**37**	64	70	**GV4P80**	40…80	3 x **LC1D65A** (4)
45	80	100	–	–	–	**GV4P115**	65…115	3 x **LC1D115** (6)
55	97	100	**55**	90	70	**GV4P115**	65…115	3 x **LC1D115** (6)
75	132	70	**75**	125	65	**GV7RS150**	90…150	3 x **LC1D150** (6)
–	–	–	**90**	146	65	**GV7RS150**	90…150	3 x **LC1D150** (6)
90	160	70	**110**	178	65	**GV7RS220**	132…220	3 x **LC1F185** (7)
110	195	70	**132**	215	65	**GV7RS220**	132…220	3 x **LC1F225** (7)

*(1) The breaking performance of circuit breakers **GV2 P** can be increased by adding a current limiter **GV1 L3**, see page B6/54.*
*(2) For mounting 3 contactors **LC1 D09**, star-delta starter kit **LAD 91217** must be ordered separately, see page B8/31.*
*(3) For mounting 3 contactors **LC1 D18** or **LC1 D25**, star-delta starter kit **LAD 93217** must be ordered separately, see page B8/31.*
*(4) For mounting 3 contactors **LC1 D●●A**, star-delta starter kit **LAD 9SD3** must be ordered separately, see page B8/31.*
*(5) For mounting 3 contactors **LC1 D80**, star-delta starter kit **LA9 D8017** must be ordered separately, see page B8/31.*
*(6) For mounting 3 contactors **LC1 D115** or **LC1 D150**, see A2/15.*
*(7) For mounting 3 contactors **LC1 F185** or **LC1 F225**, see pages A2/17 and A2/19.*

TeSys motor starters - open version

Star-delta starters with circuit breaker, contactors and thermal overload relay

1.5 to 315 kW at 400/415 V: type 1 coordination

Maximum operating rate: LC3 K and LC3 F: 12 starts/hour; LC3 D: 30 starts/hour.
Maximum starting time: LC3 K and LC3 D: 30 seconds; LC3 F: 20 seconds.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3								Circuit breaker			Star-delta contactors	Thermal overload relay	
400/415 V				440 V				Reference	Rating	Irm (2)	Reference	Reference	Setting range
P	Ie	IrD (1)	Iq	P	Ie	IrD (1)	Iq						
kW	A	A	kA	kW	A	A	kA		A	A			A
–	–	–	–	**1.5**	3.06	1.8	50	**LC3D32A**	4	51	**LC3K06**	**LR2K0308**	1.8…2.6
1.5	3.6	2	50	**2.2**	4.42	3	50						
2.2	4.9	3	50	**3**	5.77	3	50	**GV2LE10**	6.3	78	**LC3K06**	**LR2K0310**	2.6…3.7
3	6.5	4	50	–	–	–	–	**GV2LE14**	10	138	**LC3K06**	**LR2K0312**	3.7…5.5
–	–	–	–	**4**	7.9	5	50	**GV2LE10**	6.3	78	**LC3K06**	**LR2K0312**	3.7…5.5
4	8.5	5	50	–	–	–	–	**GV2LE14**	10	138	**LC3K06**	**LR2K0312**	3.7…5.5
–	–	–	–	**5.5**	10.4	6	15	**GV2LE14**	10	138	**LC3K06**	**LR2K0314**	5.5…8
5.5	11.5	6	15	–	–	–	–	**GV2LE16**	14	170	**LC3K06**	**LR2K0314**	5.5…8
–	–	–	–	**7.5**	13.7	8	8	**GV2LE16**	14	170	**LC3K09**	**LR2K0316**	8…11.5
7.5	15.5	9	15	–	–	–	–	**GV2LE20**	18	223	**LC3K09**	**LR2K0316**	8…11.5
–	–	–	–	**9**	16.9	1	8	**GV2LE16**	14	170	**LC3D12A**	**LRD16**	9…13
9	18.1	10	15	–	–	–	–	**GV2LE22**	25	327	**LC3K12**	**LR2K0316**	8…11.5
–	–	–	–	**11**	20.1	12	8	**GV2LE20**	18	223	**LC3K12**	**LR2K0321**	10…14
11	22	12	15	–	–	–	–	**GV2LE22**	25	327	**LC3K12**	**LR2K0321**	10…14
–	–	–	–	**15**	26.5	15	6	**GV2LE22**	25	327	**LC3D18A**	**LRD21**	12…18
15	29	16	10	–	–	–	–	**GV2LE32**	32	384	**LC3D18A**	**LRD21**	12…18
18.5	35	20	50	**18.5**	32.8	19	50	**GV3L40**	40	560	**LC3D18A**	**LRD22**	16…24
22	41	24	50	**22**	39	23	50	**GV3L50**	50	700	**LC3D32A**	**LRD32**	23…32
–	–	–	–	**30**	51.5	30	50	**GV3L65**	65	910	**LC3D32A**	**LRD32**	23…32
30	55	33	50	–	–	–	–	**GV3L65**	65	910	**LC3D32A**	**LRD35**	30…38
–	–	–	–	**37**	64	37	50	**GV3L65**	65	910	3 x **LC1D40A** (4)	**LRD340**	30…40
37	66	40	100	–	–	–	–	**GV4L80**	80	640	3 x **LC1D40A** (4)	**LRD350**	37…50
–	–	–	–	**37**	64	37	70	**GV4L80**	80	640	3 x **LC1D40A** (4)	**LRD340**	30…40
–	–	–	–	**45**	76	44	70	**GV4L80**	80	800	2 x **LC1D50A** +1 x **LC1D40A** (4)	**LRD350**	30…40
45	80	47	100	–	–	–	–	**GV4L115**	115	805	2 x **LC1D50A** +1 x **LC1D40A** (4)	**LRD350**	30…40
55	97	58	100	**55**	90	52	70	**GV4L115**	115	805	2 x **LC1D50A** +1 x **LC1D40A** (4)	**LRD350**	30…40
–	–	–	–	**75**	125	72	(3)	**NSX160●MA** (3)	150	1200	**LC3D80**	**LRD3363**	63…80
75	132	78	(3)	–	–	–	–	**NSX160●MA** (3)	150	1200	**LC3D80**	**LRD3363**	63…80
–	–	–	–	**90**	146	85	(3)	**NSX160●MA** (3)	150	1200	**LC3D115**	**LRD4365**	80…104
90	160	96	(3)	**110**	178	103	(3)	**NSX250●MA** (3)	220	1760	**LC3D115**	**LRD4365**	80…104
–	–	–	–	**132**	215	125	(3)	**NSX250●MA** (3)	220	1760	**LC3D150**	**LRD4369**	110…140
110	195	116	(3)	–	–	–	–	**NSX250●MA** (3)	220	1760	**LC3D115**	**LRD4367**	95…120
–	–	–	–	**160**	256	148	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	2240	**LC3D150**	**LR9D5369**	90…150
–	–	–	–	**200**	321	186	(3)	**NSX630●** + **Micrologic 1.3M** (3)	500	3150	**LC3F225**	**LR9F5371**	132…220
132	230	139	(3)	–	–	–	–	**NSX400●** + **Micrologic 1.3M** (3)	320	2240	**LC3D150**	**LRD4369**	110…140
160	280	165	(3)	–	–	–	–	**NSX400●** + **Micrologic 1.3M** (3)	320	2560	**LC3F185**	**LR9F5371**	132…220
200	350	204	(3)	**220**	353	204	(3)	**NSX630●** + **Micrologic 1.3M** (3)	500	3150	**LC3F225**	**LR9F5371**	132…220
220	388	225	(3)	**250**	401	233	(3)	**NSX630●** + **Micrologic 1.3M** (3)	500	3500	**LC3F265**	**LR9F7375**	200…330
280	480	278	(3)	–	–	–	–	**NSX630●** + **Micrologic 1.3M** (3)	500	4000	**LC3F330**	**LR9F7375**	200…330
–	–	–	–	**315**	505	295	(3)	**NSX800●** + **Micrologic 5.0 - LR off**	800	4000	**LC3F330**	**LR9F7375**	200…330
315	540	322	(3)	**355**	518	300	(3)	**NSX800●** + **Micrologic 5.0 - LR off**	800	4500	**LC3F330**	**LR9F7375**	200…330
–	–	–	–	**375**	575	334	(3)	**NSX800●** + **Micrologic 5.0 - LR off**	800	5000	**LC3F400**	**LR9F7379**	300…500

(1) IrD: current in the motor windings in delta connection.
(2) Irm: setting current of the magnetic trip.
(3) Products marketed under the Merlin Gerin brand. Reference to be completed by replacing the ● with the breaking performance code:

Breaking performance Iq (kA)	NSX100●MA		NSX160●MA, NSX250●MA		NSX400●, NSX630●		NS800●	
400/415 V	36	70	36	70	70	150	70	150
440 V	35	65	35	65	65	130	65	130
Code	**F**	**H**	**F**	**H**	**H**	**L**	**H**	**L**

*(4) For mounting 3 contactors **LC1 D●●A**, star-delta starter kit **LAD 9SD3** must be ordered separately, see page B8/31.*

TeSys motor starters - open version

Star-delta starters with circuit breaker, contactors and thermal overload relay

1.5 to 250 kW at 400/415 V: type 2 coordination

Maximum operating rate: LC3 D: 30 starts/hour; LC3 F: 12 starts/hour.
Maximum starting time: LC3 D: 30 seconds; LC3 F: 20 seconds.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3						Circuit breaker			Star-delta contactors	Thermal overload relay	
400/415 V			440 V			Reference	Rating	Irm (1)	Reference	Reference	Setting range
P	Ie	Iq	P	Ie	Iq						
kW	A	kA	kW	A	kA		A	A			A
1.5	3.6	130	**1.5**	3.06	130	**GV2L08**	4	51	3 x **LC1D09**	**LRD08**	2.5…4
2.2 **3**	4.9 6.5	130 130	**2.2** **3**	4.42 5.77	130 130	**GV2L10**	6.3	78	3 x **LC1D09**	**LRD10**	4…6
–	–	–	**4**	7.9	20	**GV2L14**	10	138	3 x **LC1D18**	**LRD14**	7…10
4	8.5	130	–	–	–	**GV2L14**	10	138	3 x **LC1D18**	**LRD16**	9…13
5.5	11.5	50	**5.5**	10.4	20	**GV2L16**	14	170	3 x **LC1D25**	**LRD16**	9…13
7.5	15.5	50	**7.5**	13.7	20	**GV2L20**	18	223	3 x **LC1D25**	**LRD21**	12…18
–	–	–	**9**	16.9	20	**GV2L22**	25	327	3 x **LC1D25**	**LRD21**	12…18
9 **11**	18.1 22	50 50	– **11**	– 20.1	– 20	**GV2L22**	25	327	3 x **LC1D25**	**LRD22**	16…24
15	29	50	**15**	26.5	50	**GV3L32**	32	448	3 x **LC1D40A** (2)	**LRD332**	23…32
18.5	35	50	–	–	–	**GV3L40**	40	560	2 x **LC1D50A** +1 x **LC1D40A** (2)	**LRD340**	30…40
–	–	–	**18.5**	32.8	50	**GV3L40**	40	560	2 x **LC1D65A** +1 x **LC1D40A** (2)	**LRD340**	30…40
22	41	50	–	–	–	**GV3L50**	50	700	2 x **LC1D50A** +1 x **LC1D40A** (2)	**LRD350**	37…50
–	–	–	**22**	39	50	**GV3L50**	50	700	2 x **LC1D65A** +1 x **LC1D40A** (2)	**LRD350**	37…50
30	55	50	**30**	51.5	50	**GV3L65**	65	910	2 x **LC1D65A** +1 x **LC1D40A** (2)	**LRD365**	48…65
–	–	–	**37**	64	50	**GV3L65**	65	910	3 x **LC1D80**	**LRD3359**	48…65
37	66	100	–	–	–	**GV4L80**	80	640	3 x **LC1D80**	**LRD3363**	63…80
–	–	–	**45**	76	70	**GV4L80**	80	800	3 x **LC1D80**	**LRD3363**	63…80
45	80	100	–	–	–	**GV4L115**	115	805	3 x **LC1D115**	**LR9D5367**	60…100
–	–	–	**55**	90	70	**GV4L115**	115	920	3 x **LC1D115**	**LR9D5367**	60…100
55	97	100	–	–	–	**GV4L115**	115	920	3 x **LC1D115**	**LR9D5369**	90…150
55	97	(3)	–	–	–	**NSX160●MA** (3)	150	1200	3 x **LC1D115**	**LR9D5369**	90…150
–	–	–	**75**	125	(3)	**NSX160●MA** (3)	150	1200	3 x **LC1D150**	**LR9D5369**	90…150
75	132	(3)	**90**	146	(3)	**NSX160●MA** (3)	150	1200	3 x **LC1D150**	**LR9D5369**	90…150
90	160	(3)	**110**	178	(3)	**NSX250●MA** (3)	220	1760	3 x **LC1F185**	**LR9F5371**	132…220
110	195	(3)	–	–	–	**NSX250●MA** (3)	220	1760	3 x **LC1F225**	**LR9F5371**	132…220
–	–	–	**132**	215	(3)	**NSX250●MA** (3)	220	1760	3 x **LC1F225**	**LR9F7375**	200…330
132	230	(3)	**160**	256	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	2240	3 x **LC1F265**	**LR9F7375**	200…330
160	280	(3)	–	–	–	**NSX400●** + **Micrologic 1.3M** (3)	320	2560	3 x **LC1F330**	**LR9F7375**	200…330
–	–	–	**200**	321	(3)	**NSX400●** + **Micrologic 1.3M** (3)	320	2880	3 x **LC1F330**	**LR9F7379**	300…500
200	350	(3)	**220**	353	(3)	**NSX630●** + **Micrologic 1.3M** (3)	500	3150	3 x **LC1F400**	**LR9F7379**	300…500
220	388	(3)	**250**	401	(3)	**NSX630●** + **Micrologic 1.3M** (3)	500	3500	3 x **LC1F400**	**LR9F7379**	300…500
250	430	(3)	–	–	–	**NSX630●** + **Micrologic 1.3M** (3)	500	4000	3 x **LC1F500**	**LR9F7379**	300…500

(1) Irm: setting current of the magnetic trip.
*(2) For mounting 3 contactors **LC1 D●●A**, star-delta starter kit **LAD 9SD3** must be ordered separately, see page B8/31.*
(3) Products marketed under the Merlin Gerin brand. Reference to be completed by replacing the ● with the breaking performance code:

Breaking performance Iq (kA)	NSX100●MA		NSX160●MA, NSX250●MA		NSX400●, NSX630●	
400/415 V	36	70	36	70	70	150
440 V	35	65	35	65	65	130
Code	**F**	**H**	**F**	**H**	**H**	**L**

Contactor utilisation categories conforming to IEC 60947-1

The standard utilisation categories define the current values which the contactor must be able to make or break.

These values depend on:
- the type of load being switched: squirrel cage or slip ring motor, resistors,
- the conditions under which making or breaking takes place: motor stalled, starting or running, reversing, plugging.

a.c. applications

Category AC-1	This category applies to all types of a.c. load with a power factor equal to or greater than 0.95 ($\cos \varphi \geq 0.95$). Application examples: heating, distribution.
Category AC-2	This category applies to starting, plugging and inching of slip ring motors. ■ On closing, the contactor makes the starting current, which is about 2.5 times the rated current of the motor. ■ On opening, it must break the starting current, at a voltage less than or equal to the mains supply voltage.
Category AC-3	This category applies to squirrel cage motors with breaking during normal running of the motor. ■ On closing, the contactor makes the starting current, which is about 5 to 7 times the rated current of the motor. ■ On opening, it breaks the rated current drawn by the motor. Application examples: all standard squirrel cage motors: lifts, escalators, conveyor belts, bucket elevators, compressors, pumps, mixers, air conditioning units, etc... .
Category AC-4	This category covers applications with plugging and inching of squirrel cage and slip ring motors. The contactor closes at a current peak which may be as high as 5 or 7 times the rated motor current. On opening it breaks this same current at a voltage which is higher, the lower the motor speed. This voltage can be the same as the mains voltage. Breaking is severe. Application examples: printing machines, wire drawing machines, cranes and hoists, metallurgy industry.

d.c. applications

Category DC-1	This category applies to all types of d.c. load with a time constant (L/R) of less than or equal to 1 ms.
Category DC-3	This category applies to starting, counter-current braking and inching of shunt motors. Time constant ≤ 2 ms. ■ On closing, the contactor makes the starting current, which is about 2.5 times the rated motor current. ■ On opening, the contactor must be able to break 2.5 times the starting current at a voltage which is less than or equal to the mains voltage. The slower the motor speed, and therefore the lower its back e.m.f., the higher this voltage. Breaking is difficult.
Category DC-5	This category applies to starting, counter-current braking and inching of series wound motors. Time constant ≤ 7.5 ms. On closing, the contactor makes a starting current peak which may be as high as 2.5 times the rated motor current. On opening, the contactor breaks this same current at a voltage which is higher, the lower the motor speed. This voltage can be the same as the mains voltage. Breaking is severe.

Utilisation categories for auxiliary contacts & control relays conforming to IEC 60947-1

a.c. applications

Category AC-14 (1)	This category applies to the switching of electromagnetic loads whose power drawn with the electromagnet closed is less than 72 VA. Application example: switching the operating coil of contactors and relays.
Category AC-15 (1)	This category applies to the switching of electromagnetic loads whose power drawn with the electromagnet closed is more than 72 VA. Application example: switching the operating coil of contactors.

d.c. applications

Category DC-13 (2)	This category applies to the switching of electromagnetic loads for which the time taken to reach 95 % of the steady state current (T = 0.95) is equal to 6 times the power P drawn by the load (with P ≤ 50 W). Application example: switching the operating coil of contactors without economy resistor.

(1) Replaces category AC-11.
(2) Replaces category DC-11.

TeSys contactors

Definitions and comments

Definitions

Altitude

The rarefied atmosphere at high altitude reduces the dielectric strength of the air and hence the rated operational voltage of the contactor. It also reduces the cooling effect of the air and hence the rated operational current of the contactor (unless the temperature drops at the same time).

No derating is necessary up to 3000 m.

Derating factors to be applied above this altitude for main pole operational voltage and current (a.c. supply) are as follows.

Altitude	3500 m	4000 m	4500 m	5000 m
Rated operetional voltage	0.90	0.80	0.70	0.60
Rated operational current	0.92	0.90	0.88	0.86

Ambient air temperature

The temperature of the air surrounding the device, measured near to the device.
The operating characteristics are given:
- with no restriction for temperatures between -5 and +55 °C,
- with restrictions, if necessary, for temperatures between -50 and +70 °C.

Rated operational current (Ie)

This is defined taking into account the rated operational voltage, operating rate and duty, utilisation category and ambient temperature around the device.

Rated conventional thermal current (Ith) (1)

The current which a closed contactor can sustain for a minimum of 8 hours without its temperature rise exceeding the limits given in the standards.

Permissible short time rating

The current which a closed contactor can sustain for a short time after a period of no load, without dangerous overheating.

Rated operational voltage (Ue)

This is the voltage value which, in conjunction with the rated operational current, determines the use of the contactor or starter, and on which the corresponding tests and the utilisation category are based. For 3-phase circuits it is expressed as the voltage between phases.
Apart from exceptional cases such as rotor short-circuiting, the rated operational voltage Ue is less than or equal to the rated insulation voltage Ui.

Rated control circuit voltage (Uc)

The rated value of the control circuit voltage, on which the operating characteristics are based. For a.c. applications, the values are given for a near sinusoidal wave form (less than 5 % total harmonic distortion).

Rated insulation voltage (Ui)

This is the voltage value used to define the insulation characteristics of a device and referred to in dielectric tests determining leakage paths and creepage distances. As the specifications are not identical for all standards, the rated value given for each of them is not necessarily the same.

Rated impulse withstand voltage (Uimp)

The peak value of a voltage surge which the device is able to withstand without breaking down.

Rated operational power (expressed in kW)

The rated power of the standard motor which can be switched by the contactor, at the stated operational voltage.

Rated breaking capacity (2)

This is the current value which the contactor can break in accordance with the breaking conditions specified in the IEC standard.

Rated making capacity (2)

This is the current value which the contactor can make in accordance with the making conditions specified in the IEC standard.

On-load factor (m)



This is the ratio between the time the current flows (t) and the duration of the cycle (T).
Cycle duration: duration of current flow + time at zero current.

Pole impedance

The impedance of one pole is the sum of the impedance of all the circuit components between the input terminal and the output terminal.
The impedance comprises a resistive component (R) and an inductive component ($X = L\omega$).
The total impedance therefore depends on the frequency and is normally given for 50 Hz.
This average value is given for the pole at its rated operational current.

Electrical durability

This is the average number of on-load operating cycles which the main pole contacts can perform without maintenance. The electrical durability depends on the utilisation category, the rated operational current and the rated operational voltage.

Mechanical durability

This is the average number of no-load operating cycles (i.e. with zero current flow through the main poles) which the contactor can perform without mechanical failure.

(1) Conventional thermal current, in free air, conforming to IEC standards.
(2) For a.c. applications, the breaking and making capacities are expressed by the rms value of the symmetrical component of the short-circuit current. Taking into account the maximum asymmetry which may exist in the circuit, the contacts therefore have to withstand a peak asymmetrical current which may be twice the rms symmetrical component.
***Note:** these definitions are extracted from standard IEC 60947-1.*

TeSys contactors

For utilisation category AC-3

Operational current and power conforming to IEC ($\theta \leq 60$ °C)

Contactor size			LC1/ LP1 K06	LC1/ LP1 K09	LC1 K12	LC1 K16	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
Maximum operational current in AC-3	≤ 440 V	**A**	6	9	12	16	9	12	18	25	32	38	40
Rated operational power P (standard motor power ratings)	220/240 V	**kW**	1.5	2.2	3	3	2.2	3	4	5.5	7.5	9	11
	380/400 V	**kW**	2.2	4	5.5	7.5	4	5.5	7.5	11	15	18.5	18.5
	415 V	**kW**	2.2	4	5.5	7.5	4	5.5	9	11	15	18.5	22
	440 V	**kW**	3	4	5.5	7.5	4	5.5	9	11	15	18.5	22
	500 V	**kW**	3	4	4	5.5	5.5	7.5	10	15	18.5	18.5	22
	660/690 V	**kW**	3	4	4	4	5.5	7.5	10	15	18.5	18.5	30
	1000 V	**kW**	–	–	–	–	–	–	–	–	–	–	–

Maximum operating rate in operating cycles/hour (1)

On-load factor	Operational power	LC1/ LP1 K06	LC1/ LP1 K09	LC1 K12	LC1 K16	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
≤ 85 %	P	–	–	–	–	1200	1200	1200	1200	1000	1000	1000
	0.5 P	–	–	–	–	3000	3000	2500	2500	2500	2500	2500
≤ 25 %	P	–	–	–	–	1800	1800	1800	1800	1200	1200	1200

Operational current and power conforming to UL, CSA ($\theta \leq 60$ °C)

Contactor size			LC1/ LP1 K06	LC1/ LP1 K09	LC1/ LP1 K12	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
Maximum operational current in AC-3	≤ 440 V	**A**	6	9	12	9	12	18	25	32	–	40
Rated operational power P (standard motor power ratings 60 Hz)	200/208 V	**HP**	1.5	2	3	2	3	5	7.5	10	–	10
	230/240 V	**HP**	1.5	3	3	2	3	5	7.5	10	–	10
	460/480 V	**HP**	3	5	7.5	5	7.5	10	15	20	–	30
	575/600 V	**HP**	3	5	10	7.5	10	15	20	25	–	30

(1) Depending on the operational power and the on-load factor ($\theta \leq 60$ °C).
(2) Other values: please contact us.

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors

For utilisation category AC-3

LC1 D50A	LC1 D65A	LC1 D80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1000	LC1 BL	LC1 BM	LC1 BP	LC1 BR
50	65	80	80	95	115	150	185	225	265	330	400	500	630	780	800	1000	750	1000	1500	1800
15	18,5	22	22	25	30	40	55	63	75	100	110	147	200	220	250	315	220	280	425	500
22	30	37	37	45	55	75	90	110	132	160	200	250	335	400	450	560	400	500	750	900
25	37	37	45	45	59	80	100	110	140	180	220	280	375	425	450	630	425	530	800	900
30	37	37	45	45	59	80	100	110	140	200	250	295	400	425	450	670	450	560	800	900
30	37	37	55	55	75	90	110	129	160	200	257	355	400	450	450	–	500	600	750	900
33	37	37	45	45	80	100	110	129	160	220	280	335	450	475	475	–	560	670	750	900
–	–	-	45	45	65	75	100	100	147	160	185	335	450	450	450	–	530	530	670	750

LC1 D50A	LC1 D65A	LC1 D80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1000	LC1 BL	LC1 BM	LC1 BP	LC1 BR
1000	1000	1000	750	750	750	750	750	750	750	750	500	500	500	500	500	(2)	120	120	120	120
2500	2500	2500	2000	2000	2000	1200	2000	2000	2000	2000	1200	1200	1200	1200	600	(2)	120	120	120	120
1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	600	600	(2)	120	120	120	120

LC1 D50A	LC1 D65A	LC1 D80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1000
50	65	65	80	95	115	150	185	225	265	330	400	500	630	780	800	1000
15	20	20	30	30	30	40	50	60	60	75	100	150	250	–	350	350
15	20	20	30	30	40	50	60	75	75	100	125	200	300	450	400	400
40	40	40	60	60	75	100	125	150	150	200	250	400	600	900	900	900
40	50	50	60	60	100	125	150	150	200	250	300	500	800	900	900	–

TeSys contactors
For utilisation category AC-3

Selection according to required electrical durability, in category AC-3 (Ue ≤ 440 V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.
The current broken (Ic) in category AC-3 is equal to the rated operational current (Ie) of the motor.

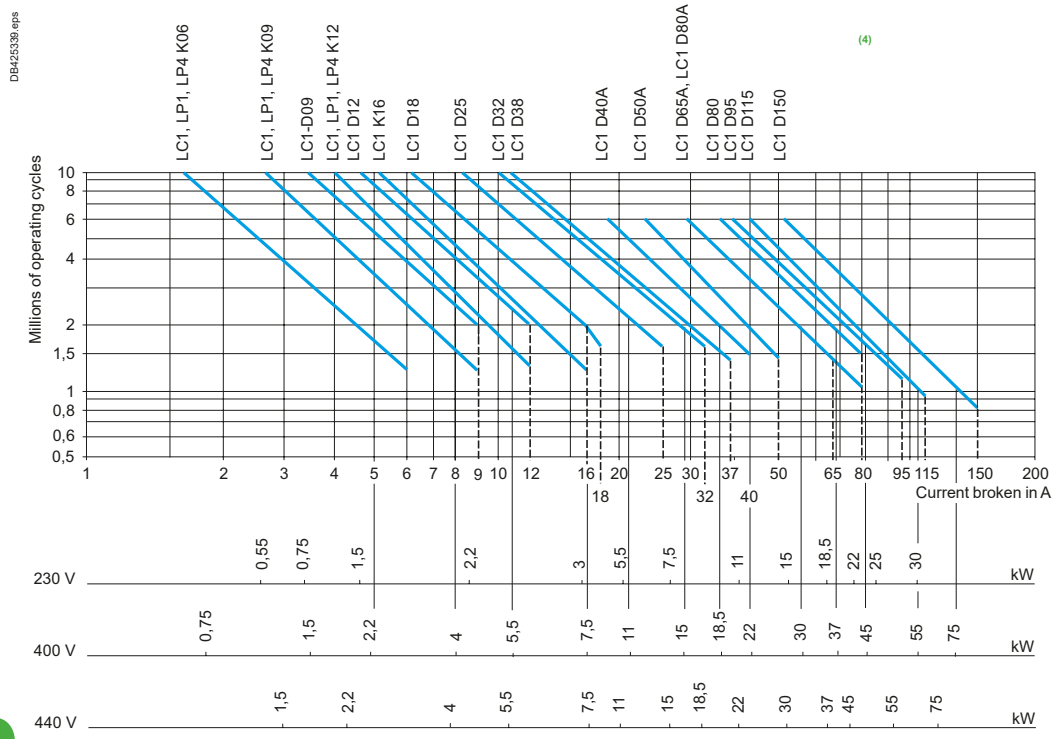

Operational power in kW-50 Hz.

Example:

Asynchronous motor with P = 5.5 kW - Ue = 400 V - Ie = 11 A - Ic = Ie = 11 A
or asynchronous motor with P = 5.5 kW - Ue = 415 V - Ie = 11 A - Ic = Ie = 11 A
3 million operating cycles required.
The above selection curves show the contactor rating needed: LC1 D18.

Note: *for TeSys D green, consult online datasheets for values.*

Selection according to required electrical durability, in category AC-3 (Ue = 660/690 V) (1)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.
The current broken (Ic) in category AC-3 is equal to the rated operational current (Ie) of the motor.

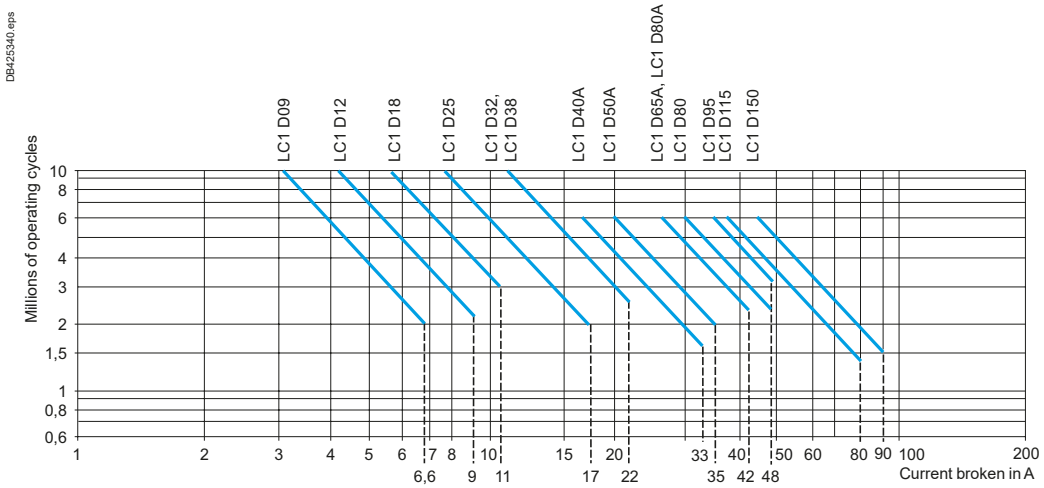

(1) For Ue = 1000 V, use the 660/690 V curves, but do not exceed the operational current at the operational power indicated for 1000 V.

Coordination and standards

TeSys contactors

For utilisation category AC-3

Selection according to required electrical durability, in category AC-3 (Ue ≤ 440 V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.
The current broken (Ic) in category AC-3 is equal to the rated operational current (Ie) of the motor.

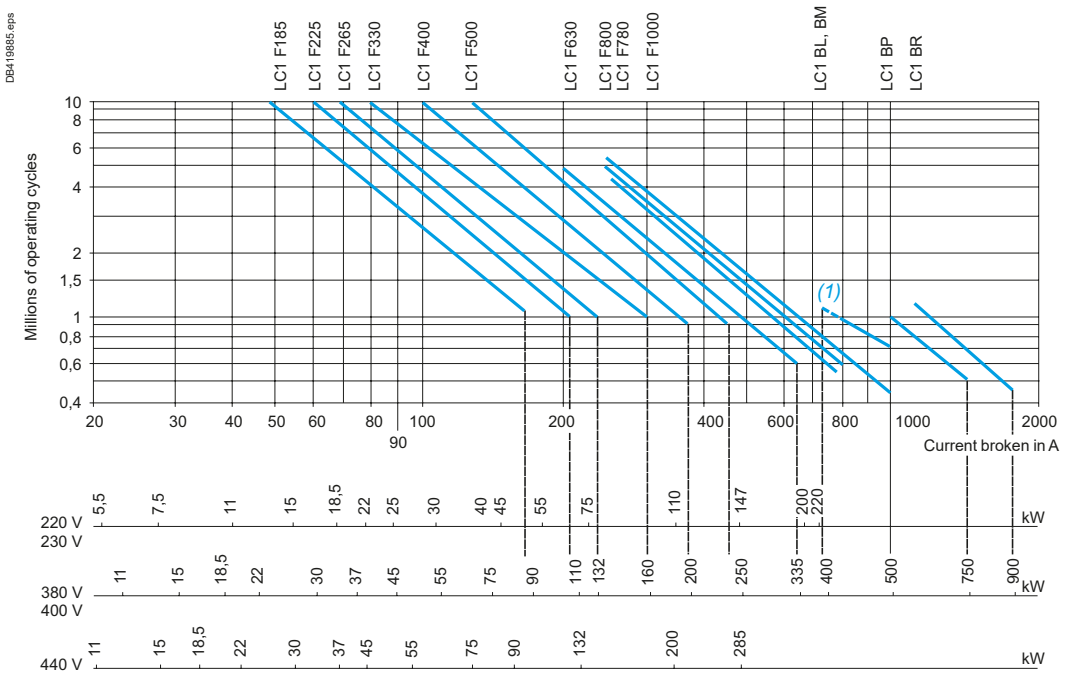

Operational power in kW-50 Hz.

Example:

Asynchronous motor with P = 132 kW - Ue = 380 V - Ie = 245 A - Ic = Ie = 245 A
or asynchronous motor with P = 132 kW - Ue = 415 V - Ie = 240 A - Ic = Ie = 240 A
1.5 million operating cycles required.
The above selection curves show the contactor rating needed: LC1 F330.

(1) The dotted lines are only applicable to LC1 BL contactors.

Selection according to required electrical durability, in category AC-3 (Ue = 660/690 V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst running.
The current broken (Ic) in category AC-3 is equal to the rated operational current (Ie) of the motor.

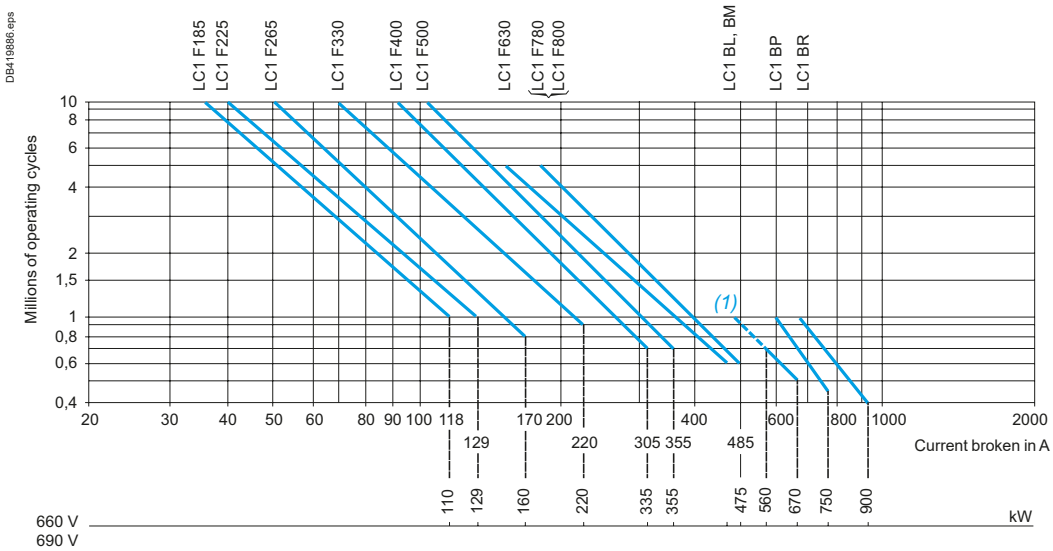

Example:

Asynchronous motor with P = 132 kW - Ue = 660 V - Ie = 140 A - Ic = Ie = 140 A
1.5 million operating cycles required.
The above selection curves show the contactor rating needed: LC1 F330.

(1) The dotted lines are only applicable to LC1 BL contactors.

Coordination and standards

TeSys contactors

For utilisation category AC-1

Maximum operational current (open-mounted device)

Contactor size			LC1/ LP1 K09	LC1/ LP1 K12	LC1 D09	LC1 DT20	LC1 D12 DT25	LC1 D18 DT32	LC1 D25 DT40	LC1 D32	LC1 D38	LC1 D40A DT60A	LC1 D50A
Maximum operating rate in operating cycles/hour			600	600	600	600	600	600	600	600	600	600	600
Connection conforming to IEC 60947-1	Cable c.s.a.	mm²	4	4	4	4	4	6	6	10	10	35	35
	Bar c.s.a.	mm	–	–	–	–	–	–	–	–	–	–	–
Operational current in AC-1 in A, according to the ambient temperature conforming to IEC 60947-1	≤ 40 °C	A	20	20	25	20	25	32	40	50	50	60	80
	≤ 60 °C	A (4)	20	20	25	20	25	32	40	50	50	60	80
	≤ 70 °C	A (4)	(1)	(1)	17	(1)	17	22	28	35	35	42	56
Maximum operational power ≤ 60 °C	220/230 V	kW	8	8	9	8	9	11	14	18	18	21	29
	240 V	kW	8	8	9	8	9	12	15	19	19	23	31
	380/400 V	kW	14	14	15	14	15	20	25	31	31	37	50
	415 V	kW	14	14	17	14	17	21	27	34	34	41	54
	440 V	kW	15	15	18	15	18	23	29	36	36	43	58
	500 V	kW	17	17	20	17	20	23	33	41	41	49	65
	660/690 V	kW	22	22	27	22	27	34	43	54	54	65	80
	1000 V	kW	–	–	–	–	–	–	–	–	–	–	–

(1) Please consult your Regional Sales Office.
*(2) With set of right-angled connectors **LA9F2100.***
*(3) With set of right-angled connectors **LA9F2600**.*
*(4) **LC1F115** to **LC1F2600**: maximum coil control voltage must not exceed rated Uc for temperature ≥ 60 °C.*

Increase in operational current by parallel connection of poles

Apply the following coefficients to the currents or power values given above; these coefficients take into account an often unbalanced current distribution between the poles:

- 2 poles in parallel: K = 1.6
- 3 poles in parallel: K = 2.25
- 4 poles in parallel: K = 2.8

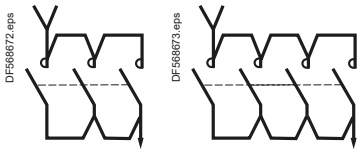

Selection according to required electrical durability, in category AC-1 (Ue ≤ 690 V)

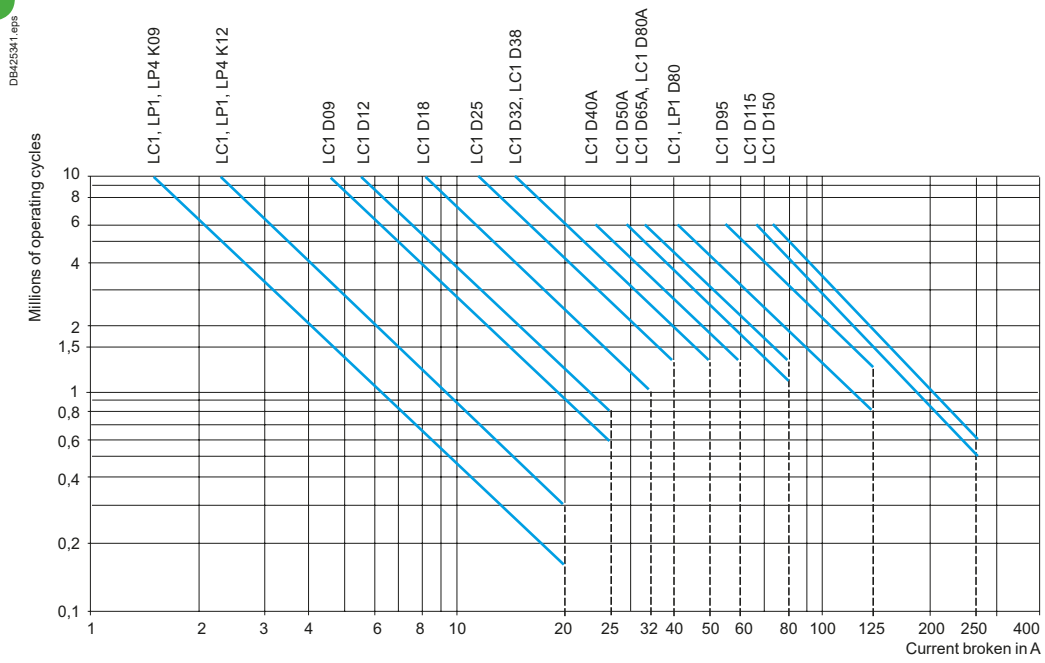

Note: for TeSys D green, consult online datasheets for values.

Control of resistive circuits (cos ϕ ≥ 0.95).
The current broken (Ic) in category AC-1 is equal to the current (Ie) normally drawn by the load.

Example:

- Ue = 220 V - Ie = 50 A θ ≤ 40 °C - Ic = Ie = 50 A
- 2 million operating cycles required
- the above selection curves show the contactor rating needed: LC1 D50A.

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors

For utilisation category AC-1

LC1 D65A D80A DT80A	LC1/ LP1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 F1000 (1)	LC1S F1200	LC1 F1250	LC1 F1400	LC1 F1700	LC1 F2100	LC1 F2600	LC1 BL	LC1 BM	LC1 BP	LC1 BR
600	600	600	600	600	600	600	600	600	600	600	600	600	600		300	300	200	200	200	200	120	120	120	120
35	50	50	120	120	150	185	185	240	–	–	–	–	–		–	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	2 30x5	2 40x5	2 60x5	2 100x5	2 60x5		2 50x8	2 100x5	2 100x5	3 100x5	4 100x5	3 100x10	2 50x5	2 80x5	2 100x5	2 100x10
80	125	125	250	250	275	315	350	400	500	700	1000	1600	1000		1200	1260	1400	1700	2100 (2)	2600	800	1250	2000	2750
80	125	125	200	200	240	280	300	360	430	580	850	1350	850		1110	1060	1190	1450	1750 (2)	2600 (3)	700	1100	1750	2400
56	80	80	160	160	180	200	250	290	340	500	700	1100	700		1020	900	1080	1300	1500 (2)	2150 (3)	600	900	1500	2000
29	45	45	80	80	90	100	120	145	170	240	350	550	350		400	420	474	570	700	840	300	425	700	1000
31	49	49	83	83	100	110	125	160	180	255	370	570	370		410	440	490	600	780	920	330	450	800	1100
50	78	78	135	135	165	175	210	250	300	430	600	950	600		700	730	820	1000	1200	1450	500	800	1200	1600
54	85	85	140	140	170	185	220	260	310	445	630	1000	630		720	760	850	1050	1300	1580	525	825	1250	1700
58	90	90	150	150	180	200	230	290	330	470	670	1050	670		750	810	910	1100	1350	1680	550	850	1400	2000
65	102	102	170	170	200	220	270	320	380	660	750	1200	750		850	920	1000	1250	1550	1910	600	900	1500	2100
80	135	135	235	235	280	300	370	400	530	740	1000	1650	1000		1200	1260	1400	1700	2100	2520	800	1100	1900	2700
–	120	120	345	345	410	450	540	640	760	950	1500	2400	1500		–	1840	2100	2500	3100	3820	1100	1700	3000	4200

(1) Please consult your Regional Sales Office.
*(2) With set of right-angled connectors **LA9F2100.***
*(3) With set of right-angled connectors **LA9F2600.***
*(4) **LC1F115** to **LC1F2600**: maximum coil control voltage must not exceed rated Uc for temperature ⩾ 60 °C.*

Selection according to required electrical durability, in category AC-1 (Ue ⩽ 690 V)

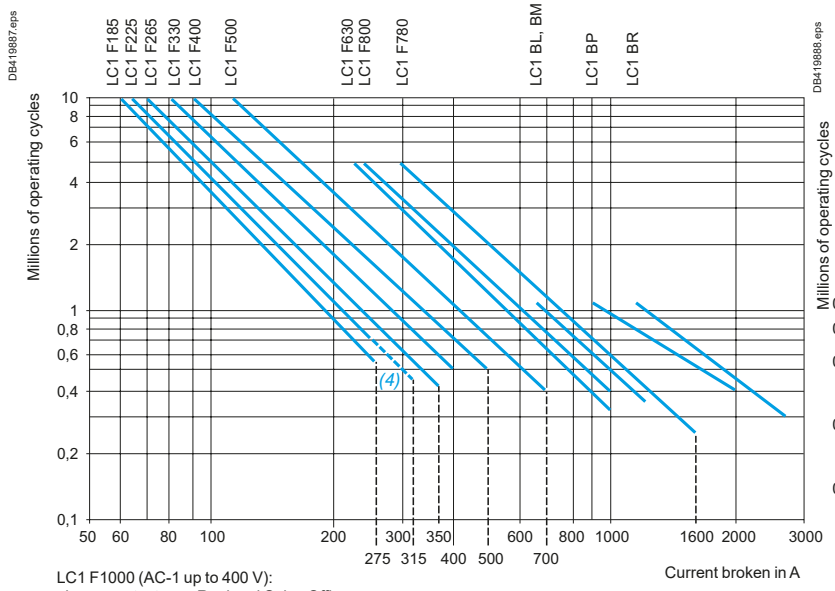

LC1 F1000 (AC-1 up to 400 V):
please contact your Regional Sales Office.

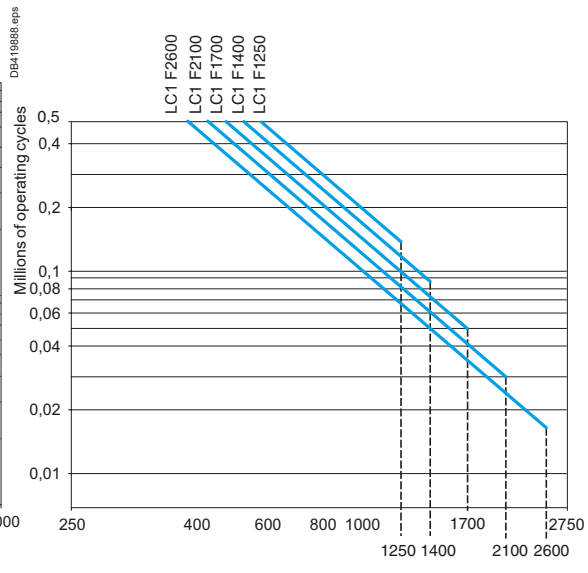

Example:

- Ue = 220 V - Ie = 500 A - θ ⩽ 40 °C - Ic = Ie = 500 A
- 2 million operating cycles required
- the above selection curves show the contactor rating needed: LC1 F780.

(1) Please consult your Regional Sales Office
(2) With set of right-angled connectors LA9F2100
(3) With set of right-angled connectors LA9F2600
*(4) The dotted lines are only applicable to **LC1 F225**.*

TeSys contactors

For utilisation categories AC-2 or AC-4

Maximum breaking current

Category AC-2: slip ring motors - breaking the starting current.
Category AC-4: squirrel cage motors - breaking the starting current.

Contactor size			LC1/ LP1 K06	LC1/ LP1 K09	LC1/ LP1 K12	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A
In category AC-4 (Ie max)	Ue ≤ 440 V Ie max broken = 6 x I motor	**A**	36	54	54	54	72	108	150	192	192	240
	440 V < Ue ≤ 690 V Ie max broken = 6 x I motor	**A**	26	40	40	40	50	70	90	105	105	150
Depending on the maximum operating rate (1) and the on-load factor, θ ≤ 60 °C (2)												
From 150 and 15 % to 300 and 10 %		**A**	20	30	30	30	40	45	75	80	80	110
From 150 and 20 % to 600 and 10 %		**A**	18	27	27	27	36	40	67	70	70	96
From 150 and 30 % to 1200 and 10 %		**A**	16	24	24	24	30	35	56	60	60	80
From 150 and 55 % to 2400 and 10 %		**A**	13	19	19	19	24	30	45	50	50	62
From 150 and 85 % to 3600 and 10 %		**A**	10	16	16	16	21	25	40	45	45	53

(1) Do not exceed the maximum number of operating cycles.
(2) For temperatures higher than 60 °C, use a maximum operating rate value equal to 80 % of the actual value when selecting from the tables.

Counter current braking (plugging)

The current varies from the maximum plug-braking current to the rated motor current.
The making current must be compatible with the rated making and breaking capacities of the contactor.

As breaking normally takes place at a current value at or near the locked rotor current, the contactor can be selected using the criteria for categories AC-2 and AC-4.

Permissible AC-4 power rating for 200 000 operating cycles

Operational voltage		LC●/ LP● K06	LC●/ LP● K09	LC● LP● K12	LC● D09	LC● D12	LC● D18	LC● D25	LC● D32	LC● D38	LC● D40A
220/230 V	**kW**	0.75	1.1	1.1	1.5	1.5	2.2	3	4	4	4
380/400 V	**kW**	1.5	2.2	2.2	2.2	3.7	4	5.5	7.5	7.5	9
415 V	**kW**	1.5	2.2	2.2	2.2	3	3.7	5.5	7.5	7.5	9
440 V	**kW**	1.5	2.2	2.2	2.2	3	3.7	5.5	7.5	7.5	11
500 V	**kW**	2.2	3	3	3	4	5.5	7.5	9	9	11
660/690 V	**kW**	3	4	4	4	5.5	7.5	10	11	11	15

TeSys contactors

For utilisation categories AC-2 or AC-4

	LC1 D50A	LC1 D65A	LC1 D80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F26	LC1 F330	LC1 F40	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
	300	390	390	480	570	630	830	1020	1230	1470	1800	2220	2760	3360	4260	3690	4320	5000	7500	9000
	170	210	210	250	250	540	640	708	810	1020	1410	1830	2130	2760	2910	2910	4000	4800	5400	6600
	140	160	160	200	200	280	310	380	420	560	670	780	1100	1400	1600	1600	2250	3000	4500	5400
	120	148	148	170	170	250	280	350	400	500	600	700	950	1250	1400	1400	2000	2400	3750	5000
	100	132	132	145	145	215	240	300	330	400	500	600	750	950	1100	1100	1500	2000	3000	3600
	80	110	110	120	120	150	170	240	270	320	390	450	600	720	820	820	1000	1500	2000	2500
	70	90	90	100	100	125	145	170	190	230	290	350	500	660	710	710	750	1000	1500	1800

	LC● D50A	LC● D65A	LC1 D80A	LC● D80	LC● D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
	5.5	7.5	7.5	7.5	9	9	11	18.5	22	28	33	40	45	55	63	63	90	110	150	200
	11	11	11	15	15	18.5	22	33	40	51	59	75	80	100	110	110	160	160	220	250
	11	11	11	15	15	18.5	22	37	45	55	63	80	90	100	110	110	160	160	250	280
	11	15	15	15	15	18.5	22	37	45	59	63	80	100	110	132	132	160	200	250	315
	15	15	15	22	22	30	37	45	55	63	75	90	110	132	150	150	180	200	250	355
	15	18.5	18.5	25	25	30	45	63	75	90	110	129	140	160	185	185	200	250	315	450

TeSys contactors

For utilisation categories AC-2 or AC-4

Selection according to required electrical durability, in categories AC-2 or AC-4 (Ue ≤ 440 V)

Control of 3-phase asynchronous squirrel cage motors (AC-4) or slip ring motors (AC-2) with breaking whilst motor stalled.
The current broken (Ic) in AC-2 is equal to 2.5 x Ie.
The current broken (Ic) in AC-4 is equal to 6 x Ie (Ie = rated operational current of the motor).

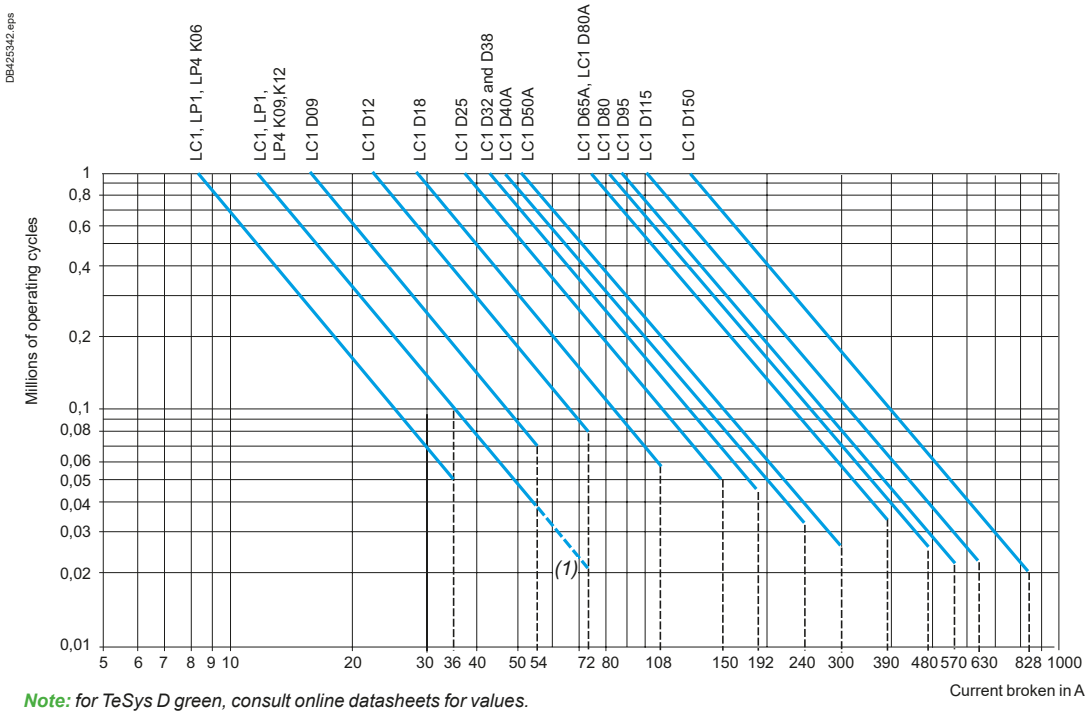

Note: for TeSys D green, consult online datasheets for values.

Example:

- asynchronous motor with P = 5.5 kW - Ue = 400 V - Ie = 11 A. Ic = 6 x Ie = 66 A
- or asynchronous motor with P = 5.5 kW - Ue = 415 V - Ie = 11 A. Ic = 6 x Ie = 66 A
- 200 000 operating cycles required
- the above selection curves show the contactor rating needed: LC1 D25.

(1) The dotted lines are only applicable to LC1, LP1 K12 contactors.

Selection according to required electrical durability, use in category AC-4 (440 V < Ue ≤ 690 V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst motor stalled.
The current broken (Ic) in AC-2 is equal to 2.5 x Ie.
The current broken (Ic) in AC-4 is equal to 6 x Ie (Ie = rated operational current of the motor).

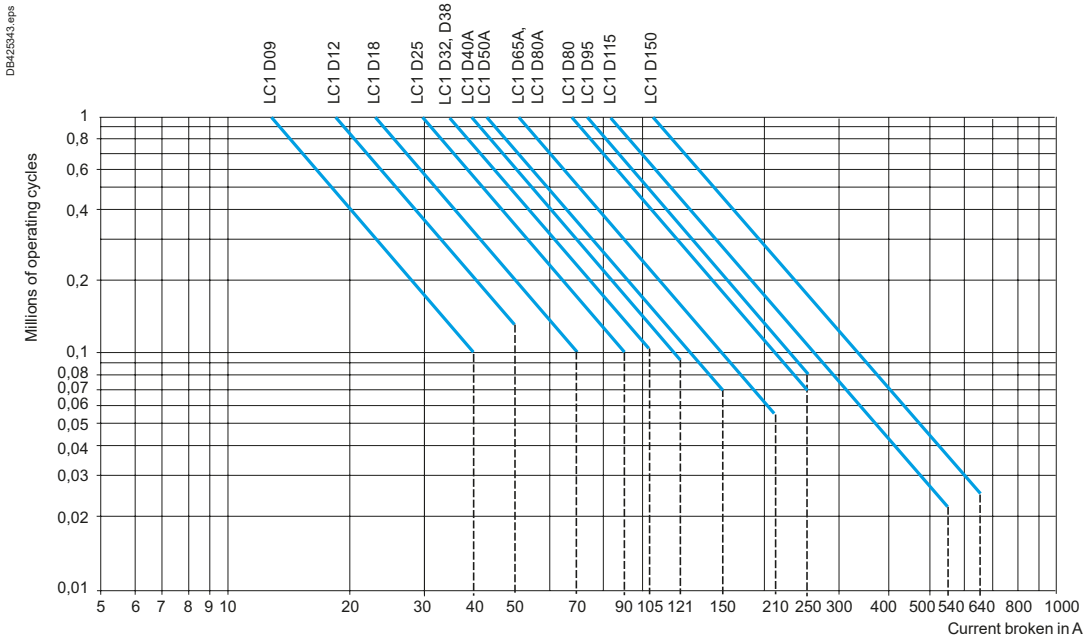

Note: for TeSys D green, consult online datasheets for values.

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

Life Is On Schneider Electric

TeSys contactors

For utilisation categories AC-2 or AC-4

Selection according to required electrical durability, in categories AC-2 or AC-4 (Ue ≤ 440 V)

Control of 3-phase asynchronous squirrel cage motors (AC-4) or slip ring motors (AC-2) with breaking whilst motor stalled.
The current broken (Ic) in AC-4 is equal to 6 x Ie.
(Ie = rated operational current of the motor).

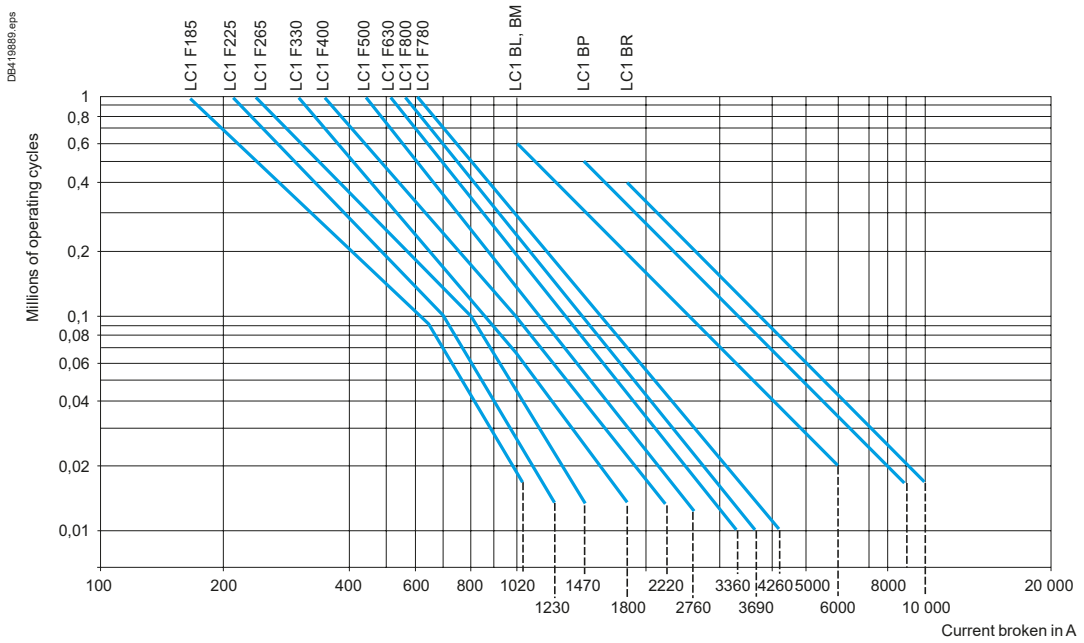

Example:

- asynchronous motor with P = 90 kW - Ue = 380 V - Ie = 170 A. Ic = 6 x Ie = 1020 A.

or asynchronous motor with P = 90 kW - Ue = 415 V - Ie = 165 A. Ic = 6 x Ie = 990 A.

- 60 000 operating cycles required.
- the above selection curves show the contactor rating needed: LC1 F265.

Selection according to required electrical durability, use in category AC-4 (440 V < Ue ≤ 690 V)

Control of 3-phase asynchronous squirrel cage motors with breaking whilst motor stalled.
The current broken (Ic) in AC-4 is equal to 6 x Ie (Ie = rated operational current of the motor).

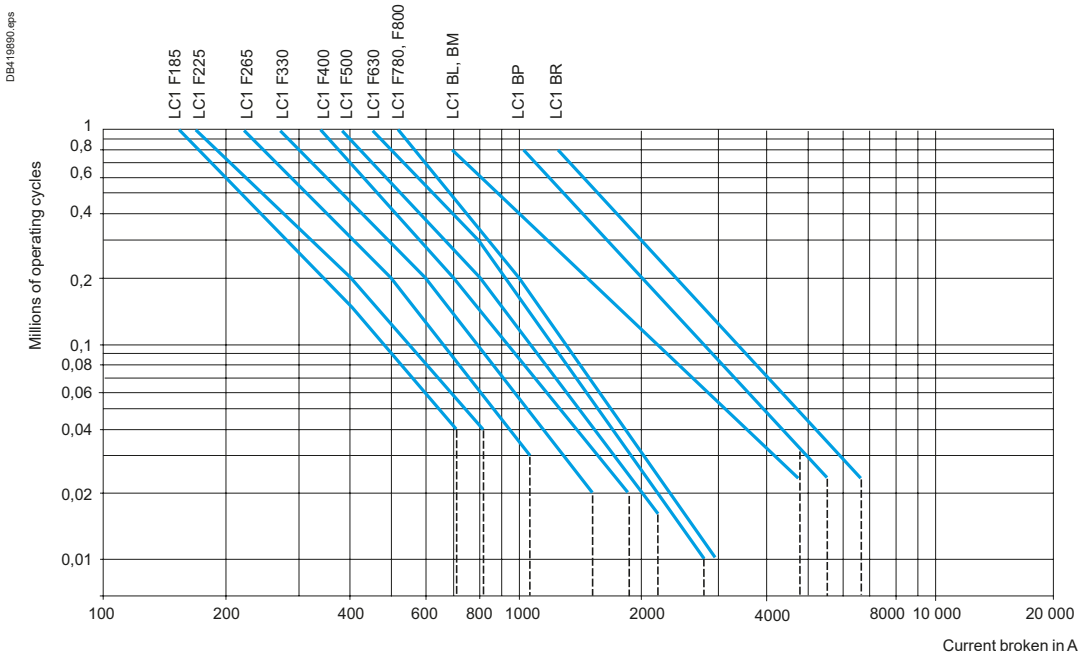

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors

For utilisation categories DC-1 to DC-5 (2)



1 pole



2 poles



3 poles



4 poles

Rated operational current (Ie) in Amperes, in utilisation category DC-1, resistive loads: time constant $\frac{L}{R}$ ≤ 1 ms, ambient temperature ≤ 60 °C

Rated operational voltage Ue	No. of poles connected in series	Contactor rating (1) (2)								
		LC1 D09	LC1 DT20	LC1 D12 DT25	LC1 D18 DT32	LC1 D25 DT40	LC1 D32	LC1 D38	LC1 D40A	LC1 DT60A
V										
24	1	20	20	20	25	32	40	40	50	50
	2	20	20	20	25	32	40	40	50	50
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
48/75	1	20	20	20	25	32	40	40	50	50
	2	20	20	20	25	32	40	40	50	50
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
125	1	4	4	4	4	7	7	7	7	7
	2	20	20	20	25	32	40	40	50	50
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
250	1	1	1	1	1	1	1	1	1	1
	2	4	4	4	4	7	7	7	7	7
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
300	3	4	4	4	4	7	7	7	7	–
	4	–	20	20	25	32	–	–	–	50
460	1	–	–	–	–	–	–	–	–	–
	4	–	–	–	–	–	–	–	–	–
900	2	–	–	–	–	–	–	–	–	–
1200	3	–	–	–	–	–	–	–	–	–
1500	4	–	–	–	–	–	–	–	–	–

Rated operational current (Ie) in Amperes, in utilisation category DC-2 to DC-5, inductive loads: time constant $\frac{L}{R}$ ≤ 15 ms, ambient temperature ≤ 60 °C

Rated operational voltage Ue	No. of poles connected in series	Contactor rating (1) (2)								
		LC1 D09	LC1 DT20	LC1 D12 DT25	LC1 D18 DT32	LC1 D25 DT40	LC1 D32	LC1 D38	LC1 D40A	LC1 DT60A
V										
24	1	20	20	20	25	32	40	40	50	50
	2	20	20	20	25	32	40	40	50	50
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
48/75	1	20	20	20	25	32	40	40	50	50
	2	20	20	20	25	32	40	40	50	50
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
125	1	2	2	2	2	3	3	3	4	4
	2	20	20	20	25	32	40	40	50	50
	3	20	20	20	25	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
250	1	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1	1
	2	2	2	2	2	3	3	3	4	4
	3	8	8	8	8	32	40	40	50	50
	4	–	20	20	25	32	–	–	–	50
300	3	2	2	2	2	3	3	3	3	3
	4	–	8	8	8	32	–	–	–	50
460	1	–	–	–	–	–	–	–	–	–
	4	–	–	–	–	–	–	–	–	–
900	2	–	–	–	–	–	–	–	–	–
1200	3	–	–	–	–	–	–	–	–	–
1500	4	–	–	–	–	–	–	–	–	–

(1) For rated operational currents of contactors LC1, LP1 K: please contact us.
(2) TeSys D Green contactors are not validated for DC-1 to DC-5 applications.

Coordination and standards

TeSys contactors

For utilisation categories DC-1 to DC-5 (2)

LC1 D50A	LC1 D65A D80A	LC1 DT80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
7	7	7	12	12	12	12	210	230	270	320	380	520	760	1180	760	700	1100	1750	2400
65	65	65	100	100	200	200	210	230	270	320	380	520	760	1180	760	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
1	1.5	1.5	2	2	10	10	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
7	7	7	12	12	200	200	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
7	7	7	12	12	200	200	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1000	850	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
–	–	–	–	–	200	–	190	200	250	280	350	450	700	1000	700	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400

LC1 D50A	LC1 D65A D80A	LC1 DT80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	–	–	–	–
65	65	65	100	100	200	200	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
4	4	4	5	5	10	10	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
65	65	65	100	100	200	200	160	180	250	300	350	500	700	1000	700	700	1100	1750	2400
65	65	65	100	100	200	200	240	240	280	310	350	550	850	1000	850	700	1100	1750	2400
–	–	65	100	–	200	–	240	240	280	310	350	550	850	1000	850	700	1100	1750	2400
1	1.5	1.5	1	1	3	3	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
4	4	4	5	5	200	200	140	160	220	280	310	480	680	900	680	700	1100	1750	2400
65	65	65	100	100	200	200	160	180	250	300	350	500	700	1000	700	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
3	3	3	5	5	200	200	140	160	220	280	310	480	680	900	680	700	1100	1750	2400
–	–	65	100	–	200	–	240	260	300	360	430	580	850	1300	850	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
–	–	–	–	–	200	–	140	160	220	280	310	480	680	800	680	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400
–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	700	1100	1750	2400

TeSys contactors

For utilisation categories DC-1 to DC-5 (1)

Selection according to required electrical durability, use in categories DC-1 to DC-5

The criteria for contactor selection are:
- the rated operational current Ie
- the rated operational voltage Ue
- the utilisation category and the time constant L/R
- the required electrical durability.

Maximum operating rate (operating cycles)

The following limits must not be exceeded: 120 operating cycles/hour at rated operational current Ie.

Electrical durability (1)

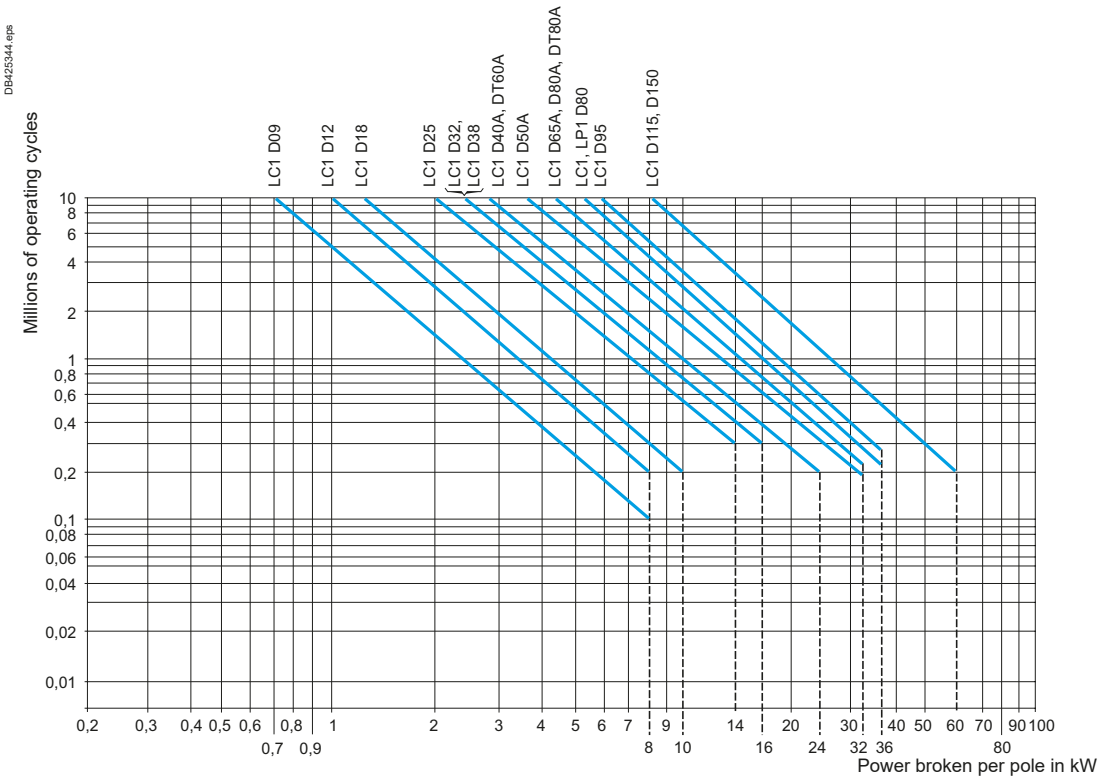

(1) TeSys D Green contactors are not validated for DC-1 to DC-5 applications

Example

Series wound motor - P = 1.5 kW - Ue = 200 V - Ie = 7.5 A.
Utilisation: reversing, inching.
- Utilisation category = DC-5.
- Select contactor LC1 D09 with 3 poles in series.
- The power broken is: Pc total = 2.5 x 200 x 7.5 = 3.75 kW.
- The power broken per pole is: 1.25 kW.
- The electrical durability read from the curve is ≥ 3 millions of operating cycles.



Use of poles in parallel

Electrical durability can be increased by using poles connected in parallel.

With N poles connected in parallel, the electrical durability becomes: electrical durability read from the curves x N x 0.7.

Note:
When the poles are connected in parallel, the maximum operational currents indicated on pages A6/36 and A6/37 must not be exceeded.

Note:
Ensure that the connections are made in such a way as to equalise the currents in each pole.

TeSys contactors

For utilisation categories DC-1 to DC-5 (1)

Selection according to required electrical durability, use in categories DC-1 to DC-5

Determining the electrical durability

The electrical durability can be read directly from the curves below, having previously calculated the power broken as follows:
P broken = U broken x I broken.
The tables below give the values of Uc and Ic for the various utilisation categories.

Power broken			
Utilisation categories	**U broken**	**I broken**	**P broken**
DC-1 Non inductive or slightly inductive loads	Ue	Ie	Ue x Ie
DC-2 Shunt wound motors, breaking whilst motor running	0.1 Ue	Ie	0.1 Ue x Ie
DC-3 Shunt wound motors, reversing, inching	Ue	2.5 Ie	Ue x 2.5 Ie
DC-4 Series wound motors, breaking whilst motor running	0.3 Ue	Ie	0.3 Ue x Ie
DC-5 Series wound motors, reversing, inching	Ue	2.5 Ie	Ue x 2.5 Ie

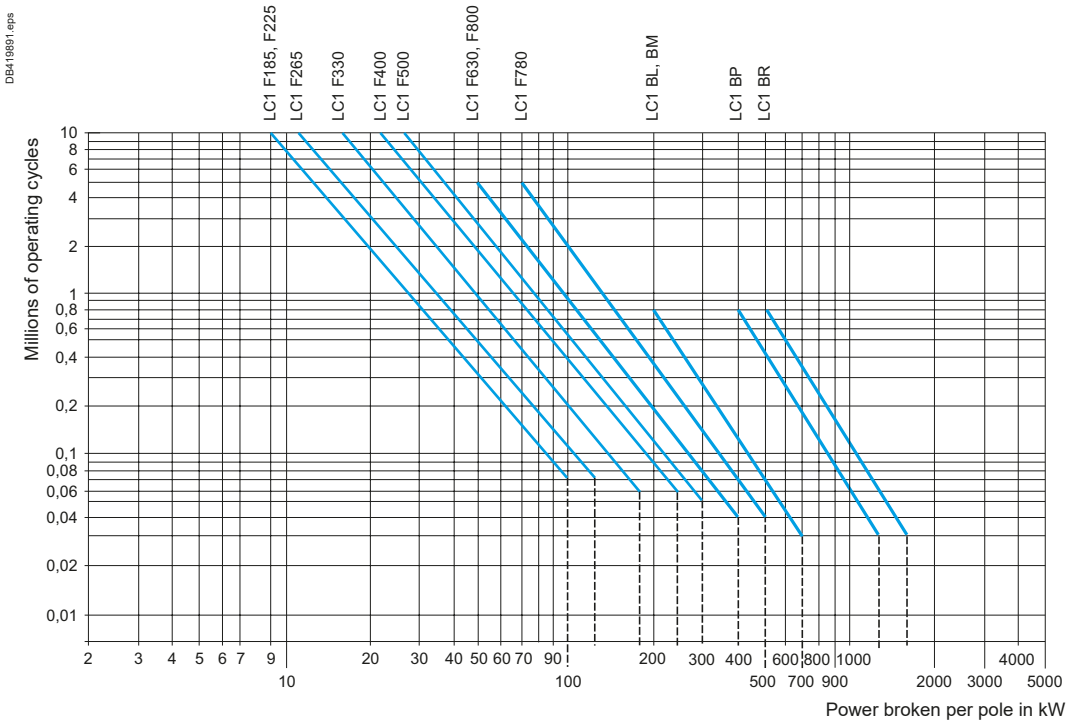

Example
Series wound motor: P = 40 kW - Ue = 200 V - Ie = 200 A.
Utilisation: reversing, inching.
Utilisation category = DC-5.

- Select contactor LC1 F265 with 2 poles in series.
- The power broken is: Pc total = 2.5 x 200 x 200 = 100 kW.
- The power broken per pole is 50 kW.
- The electrical durability read from the curve is 500000 operating cycles.

TeSys contactors
For lighting circuits

General

The operating conditions of lighting circuits have the following characteristics:
- continuous duty: the switching device can remain closed for several days or even months
- a dispersion factor of 1: all luminaires in the same group are switched on or off simultaneously
- a relatively high temperature around the device due to the enclosure, the presence of fuses, or an unventilated control panel location.

This is why the operational current for lighting is lower than the value given for AC-1 duty.

Protection

The continuous duty current drawn by a lighting circuit is constant. In fact:
- it is unlikely that the number of luminaires of an existing circuit will be modified
- this type of circuit cannot create an overload of long duration.

It is therefore only necessary to provide short-circuit protection.
This can be provided by:
- gG type fuses, or
- modular circuit breakers.

Nevertheless, it is always possible and sometimes more economical (smaller cable size) to protect the circuit by a thermal overload relay and associated aM type uses.

Distribution system

Single-phase circuit, 220/240 V

The tables on pages A6/41 to A6/45 are based on a single-phase 220/240 V circuit and can therefore be applied directly in this case.

3-phase circuit, 380/415 V (with neutral)

The total number of lamps (N) to be switched simultaneously is divided into three equal groups, each connected between one phase and neutral. The contactor can then be selected from the 220/240 V single-phase tables for a number of lamps equal to $\frac{N}{3}$ lamps.

3-phase circuit, 220/240 V

The total number of lamps (N) to be switched simultaneously is divided into three equal groups, each connected between 2 phases (L1-L2), (L2-L3), (L3-L1).
The contactor can then be selected from the 220/240 V single-phase table for a number of lamps equal to $\frac{N}{\sqrt{3}}$ lamps.

Contactor selection tables

For the different types of lamps, the tables on pages A6/41 to A6/45 give the maximum number of lamps of unit power P (in Watts), which can be switched simultaneously for each size of contactor.
They are based on:
- a 220/240 V single-phase circuit
- an ambient temperature of 55 °C (1), taking into account the operating conditions (see General paragraph)
- an electrical life of more than 10 years (200 days' operation per year).

They take into account:
- the total current drawn (including ballast)
- transient phenomena which occur at switch-on
- the starting currents and their duration
- the circulation of any harmonics which may be present.

Lamps with compensating capacitor C (µF) connected in parallel

Parallel connected compensating capacitors **C** cause a current peak at the moment of switch-on. To ensure that the value of this current peak remains compatible with the making characteristics of the contactors, the unit value of the capacitance must not exceed the following:

Switching contactor rating	LC1 K09	LP1 K09	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A	LC1 D50A	LC1 D65A	LC1 D80A	LC1 D80
Maximum unit value C (µF) of parallel connected compensating capacitor	7	3	18	18	25	60	96	96	120	120	240	240	240

Switching contactor rating	LC1 D80	LC1 D95	LC1 D115	LC1 D150	LC1 F185	LC1 F225	LC1 F265	LC1 F330	LC1 F400	LC1 F500	LC1 F630	LC1 F800
Maximum unit value C (µF) of parallel connected compensating capacitor	240	240	300	360	800	1200	1700	2500	4000	6000	9000	10800

This value is independent of the number of lamps switched by the contactor.
(1) For an ambient temperature of 40 °C, multiply the number by 1.2.

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors
For lighting circuits

Usual values

The tables show the following values:
- IB: value of current drawn by each lamp at its rated voltage,
- C: unit capacitance for each lamp,

corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Incandescent and halogen lamps

P (W)	60	75	100	150	200	300	500	750	1000	
IB (A)	0.27	0.34	0.45	0.68	0.91	1.40	2.30	3.40	4.60	LC1
Max. no. of lamps according to P (W)	35	28	21	14	10	6	4	2	2	K09
	59	47	35	23	17	11	7	4	3	D09, D12
	77	61	46	30	23	15	9	6	4	D18
	92	73	55	36	27	18	11	7	5	D25
	129	103	77	51	38	25	15	10	7	D32, D38
	163	129	97	64	48	31	19	13	9	D40A
	207	164	124	82	62	40	24	16	12	D50A, D65A, D80A
	296	235	177	117	88	57	34	23	17	D80, D95
	430	340	256	170	126	82	50	34	24	D115
	466	370	280	184	138	90	54	36	26	D150
	710	564	426	282	210	136	82	56	40	F185
	770	610	462	304	228	148	90	60	44	F225
	888	704	532	352	262	170	104	70	52	F265
	1006	800	604	400	298	194	118	80	58	F330
	1274	1010	764	504	378	244	148	100	74	F400
	1718	1364	1030	682	508	330	200	136	100	F500
	2328	1850	1396	924	690	448	272	184	136	F630
	2776	2204	1666	1102	824	534	326	220	162	F800

Mixed lighting lamps

P (W)	100	160	250	500	1000	
IB (A)	0.45	0.72	1.10	2.30	4.50	LC1
Max. no. of lamps according to P (W)	21	13	8	4	2	K09
	35	22	14	7	3	D09, D12
	46	29	18	9	4	D18
	55	36	23	11	5	D25
	77	48	30	15	7	D32, D38
	97	61	38	19	9	D40A
	124	77	49	24	12	D50A, D65A, D80A
	177	111	70	34	17	D80, D95
	256	160	104	50	26	D115
	280	174	114	54	28	D150
	426	266	174	82	42	F185
	462	288	188	90	46	F225
	532	332	218	104	52	F265
	604	378	246	118	60	F330
	764	478	312	150	76	F400
	1030	644	422	202	102	F500
	1398	874	572	272	140	F630
	1666	1040	680	326	166	F800

TeSys contactors
For lighting circuits

Usual values

The tables show the following values:
- IB: value of current drawn by each lamp at its rated voltage
- C: unit capacitance for each lamp

corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Fluorescent lamps with starter. Single fitting

	Non corrected				With parallel correction						
P (W)	**20**	**40**	**65**	**80**	**110**	**20**	**40**	**65**	**80**	**110**	
IB (A)	**0.39**	**0.45**	**0.70**	**0.80**	**1.2**	**0.17**	**0.26**	**0.42**	**0.52**	**0.72**	
C (µF)	**–**	**–**	**–**	**–**	**–**	**5**	**5**	**7**	**7**	**16**	**LC1**
Max. no. of lamps according to P (W)	24	21	13	12	8	56	36	22	18	–	**K09**
	41	35	22	20	13	94	61	38	30	22	**D09, D12**
	53	46	30	26	17	123	80	50	40	29	**D18**
	66	57	37	32	21	152	100	61	50	36	**D25**
	89	77	50	43	29	205	134	83	67	48	**D32, D38**
	112	97	62	55	36	258	169	104	84	61	**D40A**
	143	124	80	70	46	329	215	133	107	77	**D50A, D65A, D80A**
	205	177	114	100	66	470	367	190	153	111	**D80, D95**
	410	354	228	200	132	940	614	380	306	222	**D115, D150**
	492	426	274	240	160	1128	738	456	368	266	**F185**
	532	462	296	260	172	1224	800	490	400	288	**F225**
	614	532	342	300	200	1412	922	570	462	332	**F265**
	696	604	388	340	226	1600	1046	648	522	378	**F330**
	882	764	490	430	286	2024	1322	818	662	478	**F400**
	1190	1030	662	580	386	2728	1724	1104	892	644	**F500**
	1612	1398	698	786	524	3700	2418	1498	1210	874	**F630, F800**

Fluorescent lamps with starter. Twin fitting

	Non corrected					With series correction					
P (W)	**2x20**	**2x40**	**2x65**	**2x80**	**2x110**	**2x20**	**2x40**	**2x65**	**2x80**	**2x110**	
IB (A)	**2x0.22**	**2x0.41**	**2x0.67**	**2x0.82**	**2x1.1**	**2x0.13**	**2x0.24**	**2x0.39**	**2x0.48**	**2x0.65**	**LC1**
Max. no. of lamps according to P (W)	2x21	2x11	2x7	2x5	2x4	2x36	2x20	2x12	2x10	2x7	**K09**
	2x36	2x18	2x10	2x8	2x6	2x60	2x32	2x20	2x16	2x12	**D09, D12**
	2x46	2x24	2x14	2x12	2x8	2x80	2x42	2x26	2x20	2x16	**D18**
	2x58	2x30	2x18	2x14	2x10	2x100	2x54	2x32	2x26	2x20	**D25**
	2x78	2x42	2x26	2x20	2x14	2x134	2x72	2x44	2x36	2x26	**D32, D38**
	2x100	2x52	2x32	2x26	2x18	2x168	2x90	2x56	2x44	2x32	**D40A**
	2x126	2x68	2x40	2x34	2x24	2x214	2x116	2x70	2x58	2x42	**D50A, D65A, D80A**
	2x180	2x96	2x58	2x48	2x36	2x306	2x166	2x102	2x82	2x60	**D80, D95**
	2x360	2x194	2x118	2x96	2x72	2x614	2x332	2x204	2x166	2x122	**D115, D150**
	2x436	2x234	2x142	2x116	2x86	2x738	2x400	2x246	2x200	2x148	**F185**
	2x472	2x254	2x154	2x126	2x94	2x800	2x432	2x266	2x216	2x160	**F225**
	2x544	2x292	2x178	2x146	2x108	2x922	2x500	2x308	2x250	2x184	**F265**
	2x618	2x332	2x202	2x166	2x124	2x1046	2x566	2x348	2x282	2x208	**F330**
	2x782	2x420	2x256	2x210	2x156	2x1322	2x716	2x440	2x358	2x264	**F400**
	2x1054	2x566	2x346	2x282	2x210	2x1784	2x966	2x594	2x482	2x356	**F500**
	2x1430	2x766	2x468	2x384	2x286	2x2418	2x1310	2x806	2x654	2x484	**F630, F800**

TeSys contactors
For lighting circuits

Usual values

The tables show the following values:
- IB: value of current drawn by each lamp at its rated voltage
- C: unit capacitance for each lamp

corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Fluorescent lamps without starter. Single fitting

	Non corrected					With parallel correction					
P (W)	**20**	**40**	**65**	**80**	**110**	**20**	**40**	**65**	**80**	**110**	
IB (A)	**0.43**	**0.55**	**0.80**	**0.95**	**1.4**	**0.19**	**0.29**	**0.46**	**0.57**	**0.79**	
C (µF)	**–**	**–**	**–**	**–**	**–**	**5**	**5**	**7**	**7**	**16**	**LC1**
Max. no. of lamps according to P (W)	22	17	12	10	6	50	33	20	16	–	**K09**
	37	29	20	16	11	84	55	34	28	20	**D09, D12**
	48	38	26	22	15	110	72	45	36	26	**D18**
	60	47	32	27	18	136	89	56	45	32	**D25**
	97	63	43	36	25	184	101	76	61	44	**D32, D38**
	102	80	55	46	31	231	151	95	77	55	**D40A**
	130	101	70	58	40	294	193	121	98	70	**D50A, D65A, D80A**
	186	145	100	84	57	421	275	173	140	101	**D80, D95**
	372	290	200	168	114	842	550	346	280	202	**D115, D150**
	446	348	240	202	136	1010	662	416	336	242	**F185**
	484	378	260	218	148	1094	716	452	364	262	**F225**
	558	436	300	252	170	1262	828	522	420	304	**F265**
	632	494	340	286	194	1432	938	590	476	344	**F330**
	800	624	430	362	246	1810	1186	748	604	434	**F400**
	1078	844	580	488	330	2442	1600	1008	814	586	**F500**
	1462	1144	786	662	448	3310	2168	1366	1104	796	**F630, F800**

Fluorescent lamps without starter. Twin fitting

	Non corrected					With series correction					
P (W)	**2x20**	**2x40**	**2x65**	**2x80**	**2x110**	**2x20**	**2x40**	**2x65**	**2x80**	**2x110**	
IB (A)	**2x0.25**	**2x0.47**	**2x0.76**	**2x0.93**	**2x1.3**	**2x0.14**	**2x0.26**	**2x0.43**	**2x0.53**	**2x0.72**	**LC1**
Max. no. of lamps according to P (W)	2x19	2x10	2x6	2x5	2x3	2x34	2x18	2x11	2x9	2x6	**K09**
	2x32	2x16	2x10	2x8	2x6	2x56	2x30	2x18	2x14	2x10	**D09, D12**
	2x42	2x22	2x12	2x10	2x8	2x74	2x40	2x24	2x18	2x14	**D18**
	2x52	2x26	2x16	2x12	2x10	2x92	2x50	2x30	2x24	2x18	**D25**
	2x70	2x36	2x22	2x18	2x12	2x124	2x66	2x40	2x32	2x24	**D32, D38**
	2x88	2x46	2x28	2x22	2x16	2x156	2x84	2x50	2x40	2x30	**D40A**
	2x112	2x58	2x36	2x30	2x20	2x200	2x106	2x64	2x52	2x38	**D50A, D65A, D80A**
	2x160	2x84	2x52	2x42	2x30	2x234	2x152	2x92	2x74	2x54	**D80, D95**
	2x320	2x170	2x104	2x86	2x60	2x570	2x306	2x186	2x150	2x110	**D115, D150**
	2x384	2x204	2x126	2x102	2x74	2x686	2x368	2x222	2x180	2x132	**F185**
	2x416	2x220	2x136	2x112	2x80	2x742	2x400	2x242	2x196	2x144	**F225**
	2x480	2x254	2x158	2x128	2x92	2x856	2x462	2x278	2x226	2x166	**F265**
	2x544	2x288	2x178	2x146	2x104	2x970	2x522	2x316	2x256	2x188	**F330**
	2x688	2x366	2x226	2x184	2x132	2x1228	2x662	2x400	2x324	2x238	**F400**
	2x928	2x494	2x304	2x248	2x178	2x1656	2x892	2x540	2x438	2x322	**F500**
	2x1258	2x668	2x414	2x338	2x242	2x2246	2x1210	2x730	2x592	2x436	**F630, F800**

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors
For lighting circuits

Usual values

The tables show the following values:
- IB: value of current drawn by each lamp at its rated voltage
- C: unit capacitance for each lamp

corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

Low pressure sodium vapour lamps

	Non corrected							With parallel correction							
P (W)	**35**	**55**	**90**	**135**	**150**	**180**	**200**	**35**	**55**	**90**	**135**	**150**	**180**	**200**	
IB (A)	**1.2**	**1.6**	**2.4**	**3.1**	**3.2**	**3.3**	**3.4**	**0.3**	**0.4**	**0.6**	**0.9**	**1**	**1.2**	**1.3**	
C (µF)	**–**	**–**	**–**	**–**	**–**	**–**	**–**	**17**	**17**	**25**	**36**	**36**	**36**	**36**	**LC1**
Max. no. of lamps according to P (W)	6	5	3	2	2	2	2	–	–	–	–	–	–	–	**K09**
	10	7	5	3	3	3	3	40	30	–	–	–	–	–	**D09, D12**
	12	9	6	4	4	4	4	50	37	25	–	–	–	–	**D18**
	15	11	7	6	5	5	5	63	47	31	21	19	15	14	**D25**
	21	16	10	8	8	7	7	86	65	43	28	26	21	20	**D32, D38**
	27	20	13	10	10	10	9	110	82	55	36	33	27	25	**D40A**
	35	26	17	13	13	12	12	140	105	70	46	42	35	32	**D50A, D65A, D80A**
	50	37	25	19	18	18	17	200	150	100	66	60	50	46	**D80, D95**
	100	75	50	38	36	36	34	400	300	200	132	120	100	92	**D115, D150**
	140	104	70	54	52	50	48	560	420	280	186	168	140	128	**F185**
	152	114	76	58	56	54	54	606	454	302	202	182	152	140	**F225**
	174	130	88	68	66	64	62	700	524	350	232	210	174	162	**F265**
	198	148	98	76	74	72	70	792	594	396	264	238	198	182	**F330**
	250	188	124	96	94	90	88	1002	752	502	334	300	250	252	**F400**
	338	254	168	130	126	122	118	1352	1014	676	450	406	338	312	**F500**
	496	372	248	192	186	180	174	1982	1488	992	660	594	496	458	**F630, F800**

High pressure sodium vapour lamps

	Non corrected					With parallel correction					
P (W)	**150**	**250**	**400**	**700**	**1000**	**150**	**250**	**400**	**700**	**1000**	
IB (A)	**1.9**	**3.2**	**5**	**8.8**	**12.4**	**0.84**	**1.4**	**2.2**	**3.9**	**5.5**	
C (µF)	**–**	**–**	**–**	**–**	**–**	**20**	**32**	**48**	**96**	**120**	**LC1**
Max. no. of lamps according to P (W)	4	2	1	–	–	–	–	–	–	–	**K09**
	6	3	2	1	–	–	–	–	–	–	**D09, D12**
	7	4	3	1	1	17	–	–	–	–	**D18**
	10	5	3	2	1	22	13	8	–	–	**D25**
	13	8	5	2	2	30	18	11	6	–	**D32, D38**
	17	10	6	3	2	39	23	15	8	6	**D40A**
	22	13	8	4	3	50	30	19	10	7	**D50A, D65A, D80A**
	31	18	12	6	4	71	42	27	15	10	**D80, D95**
	62	36	24	12	8	142	84	54	30	20	**D115, D150**
	88	52	34	18	14	200	120	76	42	30	**F185**
	96	56	36	20	16	216	130	82	46	32	**F225**
	110	66	42	24	18	250	150	94	54	38	**F265**
	124	74	48	26	20	282	170	108	60	42	**F330**
	158	94	60	34	24	358	214	136	76	54	**F400**
	214	126	80	46	32	482	290	184	104	74	**F500**
	312	186	118	68	48	708	424	270	152	108	**F630, F800**

TeSys contactors
For lighting circuits

Usual values

The tables show the following values:
- IB: value of current drawn by each lamp at its rated voltage
- C: unit capacitance for each lamp

corresponding to the values normally quoted by lamp manufacturers.

These values are given for an ambient temperature of 55 °C (for 40 °C, multiply the number by 1.2).

High pressure mercury vapour lamps

	Non corrected							With parallel correction							
P (W)	**50**	**80**	**125**	**250**	**400**	**700**	**1000**	**50**	**80**	**125**	**250**	**400**	**700**	**1000**	
IB (A)	**0.54**	**0.81**	**1.20**	**2.30**	**4.10**	**6.80**	**9.90**	**0.3**	**0.45**	**0.67**	**1.3**	**2.3**	**3.8**	**5.5**	
C (µF)	**–**	**–**	**–**	**–**	**–**	**–**	**–**	**10**	**10**	**10**	**18**	**25**	**40**	**60**	**LC1**
Max. no. of lamps according to P (W)	14	9	6	3	1	–	–	–	–	–	–	–	–	–	**K09**
	22	14	9	5	2	1	1	40	26	17	9	–	–	–	**D09, D12**
	27	18	12	6	3	2	1	50	33	22	11	6	–	–	**D18**
	35	23	15	8	4	2	1	63	42	28	14	8	5	3	**D25**
	48	32	21	11	6	3	2	86	57	38	20	11	6	4	**D32, D38**
	61	40	27	14	8	4	3	110	73	49	25	14	8	6	**D40A**
	77	51	34	17	10	6	4	140	93	62	32	18	11	7	**D50A, D65A, D80A**
	111	74	49	26	14	8	6	200	133	89	46	26	15	10	**D80, D95**
	222	148	100	52	28	16	12	400	266	178	92	52	30	20	**D115, D150**
	310	206	140	72	40	24	17	560	372	250	128	72	44	30	**F185**
	336	224	152	78	44	26	18	606	404	272	140	78	48	32	**F225**
	388	258	174	90	50	30	20	700	466	312	162	90	54	38	**F265**
	440	294	198	102	58	34	24	792	528	354	182	102	62	42	**F330**
	556	372	250	130	72	44	30	1002	668	448	232	130	78	54	**F400**
	752	500	338	176	98	60	40	1352	902	606	312	176	106	74	**F500**
	1102	734	496	258	144	88	60	1982	1322	888	458	258	156	108	**F630, F800**

Metal iodine vapour lamps

	Non corrected				With parallel correction				
P (W)	**250**	**400**	**1000**	**2000**	**250**	**400**	**1000**	**2000**	
IB (A)	**2.5**	**3.6**	**9.5**	**20**	**1.4**	**2**	**5.3**	**11.2**	
C (µF)	**–**	**–**	**–**	**–**	**32**	**32**	**64**	**140**	**LC1**
Max. no. of lamps according to P (W)	3	2	–	–	–	–	–	–	**K09**
	4	3	1	–	–	–	–	–	**D09, D12**
	6	4	1	–	–	–	–	–	**D18**
	7	5	2	–	13	9	–	–	**D25**
	10	7	2	1	18	13	4	–	**D32, D38**
	13	9	3	1	23	16	6	–	**D40A**
	16	11	4	2	30	21	7	–	**D50A, D65A, D80A**
	24	16	6	3	42	30	11	5	**D80, D95**
	48	32	12	6	84	60	22	10	**D115, D150**
	66	46	18	8	120	84	32	14	**F185**
	72	50	20	10	130	90	34	16	**F225**
	84	58	22	12	150	104	40	18	**F265**
	94	66	24	14	170	118	44	20	**F330**
	120	84	32	16	214	150	56	26	**F400**
	162	112	42	20	290	202	76	36	**F500**
	238	164	62	30	424	298	112	52	**F630, F800**

TeSys contactors
For heating circuits



General
A heating circuit is a power switching circuit supplying one or more resistive heating elements switched by a contactor. The same general rules apply as for motor circuits, except that heating circuits are not normally subjected to overload currents. It is therefore only necessary to provide short-circuit protection.

Characteristics of heating elements
The examples below are based on resistive heating elements used for industrial furnaces or for the heating of buildings (infra-red or resistive radiant type, convector heaters, closed loop heating circuits, etc.). The variation in resistance values between hot and cold states causes a current peak at switch-on which never exceeds 2 to 3 times the rated operational current (In). This initial peak does not recur during normal operation where subsequent switching is thermostatically controlled. The rated power and current of a heater are given for the normal operating temperature.

Protection
The steady state current drawn by a heating circuit is constant when the voltage is stable. In fact:
- it is unlikely that the number of loads in an existing circuit will be modified
- this type of circuit cannot create overloads. It is therefore only necessary to provide short-circuit protection.

This can be provided by:
- gG type fuses, or
- modular circuit breakers.

Nevertheless, it is always possible and sometimes more economical (smaller cable size) to protect the circuit by a thermal overload relay and associated aM type fuses.

Switching, control, protection
A heating element or group of heating elements of a given power may be either single-phase or 3-phase and may be supplied from a 220/127 V or a 400/230 V distribution system. Excluding a single-phase 127 V system (which is no longer commonly used), the following 3 types of circuit arrangement are possible:
- single-phase, 2-pole switching
- single-phase, 4-pole switching
- 3-phase switching



Circuit controlled by 2 poles of the contactor.

Component selection according to the power switched
The combinations suggested below are based on an ambient temperature of 55 °C and for powers at the nominal voltage, but they also ensure switching in the event of prolonged overloads up to 1.05 Ue.

Single-phase, 2-pole switching				
Maximum power (kW)				Contactor rating
220/240 V	380/415 V	660/690 V	1000 V	
3.5	6.5	11	–	**LC1, LP1K09**
4.5	8	14	–	**LC1D12**
6	10.5	18.5	–	**LC1D18**
7	13	22.5	–	**LC1D25**
10	18	30.5	–	**LC1D32, LC1D38**
13	22.5	39.5	48	**LC1D40A**
16.5	28.5	43.5	68	**LC1D65A, LC1D80A**
24	42	73	82.5	**LC1, LP1D80**
44	76	118	157	**LC1D115, LC1D150**
48	83	130	170	**LC1F185**
52	90	145	185	**LC1F225**
60	104	160	210	**LC1F265**
75	130	200	250	**LC1F330**
86	145	230	300	**LC1F4002**
116	200	310	400	**LC1F5002**
170	290	450	695	**LC1F6302, LC1F800**
270	460	715	945	**LC1F780**
140	242	370	490	**LC1BL32**
220	380	580	770	**LC1BM32**
350	605	925	1225	**LC1BP32**
480	830	1270	1680	**LC1BR32**

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors
For heating circuits





Circuit controlled by a 4-pole contactor with the poles parallel connected in pairs using appropriate connecting links.
This solution enables the control of power values approximately equivalent to those controlled by the same contactor on 3-phase.



Circuit controlled by 3 poles of the contactor.

Component selection according to the power switched

Single-phase, 4-pole switching

Maximum power (kW)				Contactor rating
220/240 V	380/415 V	660/690 V	1000 V	
4.5	8	13.5	–	**LC1, LP1K09004**
7	13	22.5	–	**LC1DT25**
12	21	36.5	–	**LC1DT40**
26	45.5	79.5	109	**LC1DT80A**
38	66	117.5	132	**LC1, LP1D80004**
70	121	190	251	**LC1D115004**
76	132	202	270	**LC1F1854**
80	142	230	295	**LC1F2254**
96	166	253	335	**LC1F2654**
120	205	320	400	**LC1F3304**
137	236	363	480	**LC1F4004**
185	320	490	650	**LC1F5004**
272	470	718	950	**LC1F6304**
425	735	1140	1520	**LC1F7804**
224	387	590	785	**LC1BL34**
352	608	930	1230	**LC1BM34**
560	968	1478	1960	**LC1BP34**
768	1328	2025	2685	**LC1BR34**

3-phase switching

Maximum power (kW)				Contactor rating
220/240 V	380/415 V	660/690 V	1000 V	
4.5	8	13.5	–	**LC1, LP1K09**
7	13	22.5	–	**LC1D12**
10	18	30.5	–	**LC1D18**
13	22.5	39.5	–	**LC1D25**
18	31	52.5	–	**LC1D32, LC1D38**
22.5	38	68	78	**LC1D40A**
28.5	49	86	112.5	**LC1D65A, LC1D80A**
40.5	70.5	126	135.5	**LC1, LP1D80**
76	131	206	275	**LC1D115, LC1D150**
82	143	220	295	**LC1F185**
90	155	250	320	**LC1F225**
103	179	275	370	**LC1F265**
130	225	345	432	**LC1F330**
149	256	395	525	**LC1F400**
200	346	530	710	**LC1F500**
294	509	780	1030	**LC1F630, LC1F800**
463	800	1235	1650	**LC1F780**
242	419	640	850	**LC1BL33**
380	658	1005	1350	**LC1BM33**
606	1047	1600	2150	**LC1BP33**
830	1437	2200	2950	**LC1BR33**

Application example

For a 220 V, 50 Hz, single-phase circuit supplying a total heating load of 12.5 kW. Select a 3-pole contactor **LC1D65A**.

(1) See complete contactor references on pages B8/2 to B8/7 or consult your Regional Sales Office.

TeSys contactors

For switching the primaries of 3-phase LV/LV transformers



Operating conditions

Maximum ambient temperature: 55 °C.

When a transformer is switched on, there is generally an initial current surge which reaches its peak value almost instantaneously and then decreases in a largely exponential manner to quickly reach its steady state value.

The value of this current depends on:
- the characteristics of the magnetic circuit and of the windings (cross sectional area of the core, rated inductance, number of turns, layout and size of the windings, ...)
- the performance of the magnetic laminations used
- the magnetic state of the circuit and the instantaneous value of the a.c. mains voltage at the moment of switch-on.

The inrush current at the moment of switch-on can reach 20 to 40 times the rated current for the various kVA power ratings in the tables below. This value is independent of the “no-load” or “on-load” state of the transformer.

Contactor selection

The peak magnetising current of the transformer must be lower than the values given in the tables below.
Maximum operating rate: 120 operating cycles/hour.

Contactor rating			LC1/ LP1 K06	LC1/ LP1 K09	LC1 D09	LC1 D12	LC1 D18	LC1 D25	LC1 D32	LC1 D38	LC1 D40A	LC1 D50A	LC1 D65A D80A	LC1 D80	LC1 D95	LC1 D115	LC1 D150
Maximum permissible current peak at switch-on		A	160	225	350	350	420	630	770	770	1100	1250	1400	1550	1650	1800	2000
Maximum operational power (1)	220 V 240 V	kVA	2	2.5	4	4	5	7	8.5	8.5	14	16	18	19.5	19.5	25	25
	380 V 400 V	kVA	3.5	5	7	7	8	12.5	15	15	24	27	31	34	34	50	50
	415 V 440 V	kVA	4	5.5	8	8	9	14	17	17	28	32	36	39	39	55	55
	500 V	kVA	5	7	9	9	11	16.5	20	20	32	36	40	45	45	65	65
	660 V 690 V	kVA	6	8.5	12	12	14	21.5	26.5	26.5	42	48	53	59	59	80	80
	1000 V	kVA	–	–	–	–	–	–	–	–	–	–	–	85	95	100	100

Contactor rating			LC1 F185	LC1 F225	LC1 F265	LC1 F330	LP1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 F800	LC1 BL	LC1 BM	LC1 BP	LC1 BR
Maximum permissible current peak at switch-on		A	2900	3300	3800	5000	6300	7700	9000	12 000	11 000	18 000	18 000	24 000	30 000
Maximum operational power (1)	220 V 240 V	kVA	40	45	50	65	75	100	120	175	145	230	230	300	380
	380 V 400 V	kVA	75	80	90	120	130	170	200	280	245	400	400	530	660
	415 V 440 V	kVA	80	90	100	130	140	190	220	310	270	450	450	560	700
	500 V	kVA	95	100	110	140	170	225	260	350	315	480	480	600	750
	660 V 690 V	kVA	120	130	140	170	200	270	350	400	425	600	600	800	950
	1000 V	kVA	150	170	200	225	250	375	470	650	550	700	700	1000	1200

(1) Maximum operational power corresponding to a current peak at switch-on of 30 In.

Coordination and standards

TeSys contactors

For switching 3-phase capacitor banks used for power factor correction

Standard contactors

Capacitors, together with the circuits to which they are connected, form oscillatory circuits which can, at the moment of switch-on, give rise to high transient currents (> 180 In) at high frequencies (1 to 15 kHz).
As a general rule, the peak current on energisation is lower when:

- the mains inductances are high
- the line transformer ratings are low
- the transformer short-circuit voltage is high
- the ratio between the sum of the ratings of the capacitors already switched into the circuit and that of the capacitor to be switched in is small (for multiple step capacitor banks).

In accordance with standards IEC 60070, NF C 54-100, VDE 0560, the switching contactor must be able to withstand a continuous current of 1.43 times the rated current of the capacitor bank step being switched.
The rated operational powers given in the tables below take this overload into account.
Short-circuit protection is normally provided by gI type HPC fuses rated at 1.7 to 2 In.

Operating conditions

Capacitors are directly switched. **The values of peak current at switch-on must not exceed the values indicated opposite.**
An inductor may be inserted in each of the three phases supplying the capacitors to reduce the peak current, if necessary.
Inductance values are determined according to the selected operating temperature.

Power factor correction by a single-step capacitor bank

The use of a choke inductor is unnecessary: the inductance of the mains supply is adequate to limit the peak to a value compatible with the contactor characteristics.

Power factor correction by a multiple-step capacitor bank

Select a special contactor as defined on page B8/21.
If a standard contactor is used, it is essential to insert a choke inductor in each of the three phases of each step.

Standard contactors

Maximum operating rate: 120 operating cycles/hour.
Electrical durability at maxiumum load: 100 000 operating cycles.
With choke inductors connected, where necessary.

Operational power at 50/60 Hz						Max. peak current	Contactor rating
θ ≤ 40 °C (1)			θ ≤ 55 °C (1)				
220/240 V	400/440 V	600/690 V	220/240 V	400/440 V	600/690 V		
kVAR	kVAR	kVAR	kVAR	kVAR	kVAR	A	
6	11	15	6	11	15	560	**LC1D09, D12**
9	15	20	9	15	20	850	**LC1D18**
11	20	25	11	20	25	1600	**LC1D25**
14	25	30	14	25	30	1900	**LC1D32, D38**
17	30	37	17	30	37	2160	**LC1D40**
22	40	50	22	40	50	2160	**LC1D50**
22	40	50	22	40	50	3040	**LC1D65**
35	60	75	35	60	75	3040	**LC1D80, D95**
50	90	125	38	75	80	3100	**LC1D115**
60	110	135	40	85	90	3300	**LC1D150**
70	125	160	50	100	100	3500	**LC1F185**
80	140	190	60	110	110	4000	**LC1F225**
90	160	225	75	125	125	5000	**LC1F265**
100	190	275	85	140	165	6500	**LC1F330**
125	220	300	100	160	200	8000	**LC1F400**
180	300	400	125	220	300	10 000	**LC1F500**
250	400	600	190	350	500	12 000	**LC1F630**
250	400	600	190	350	500	14 200	**LC1F800**
200	350	500	180	350	500	25 000	**LC1BL**
300	550	650	250	500	600	25 000	**LC1BM**
500	850	950	400	750	750	25 000	**LC1BP**
600	1100	1300	500	1000	1000	25 000	**LC1BR**

(1) Upper limit of temperature category conforming to IEC 60070.

Characteristics: pages B8/63 to B8/69
References: pages B8/2 to B8/7
Dimensions, Schemes: pages B8/76 to B8/82

TeSys contactors
For auto-transformer starting



Applications

Auto-transformer starting is suitable for starting all types of squirrel cage motors: with 3, 6 or even 9 terminals according to North American technology.
Starting is performed at reduced voltage and produces maximum torque at minimum line current.
It allows the starting torque ($C = f(U)^2$) to be adapted to the resistive torque of the driven machine by means of the 2 or 3 intermediate voltage take-off connections on the auto-transformer (0.65 and 0.8 Un or 0.5, 0.65 and 0.8 Un). In general, only one take-off connection is used.
This type of starting is used for high power and/or high inertia machines.
The motor is never disconnected from its power supply during starting (closed transition) and transient phenomena are eliminated.

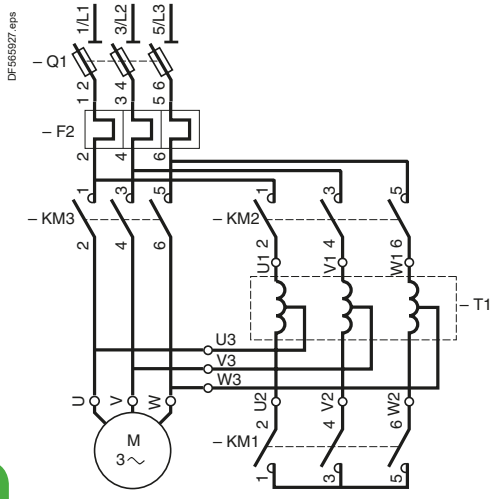

Recommended wiring scheme

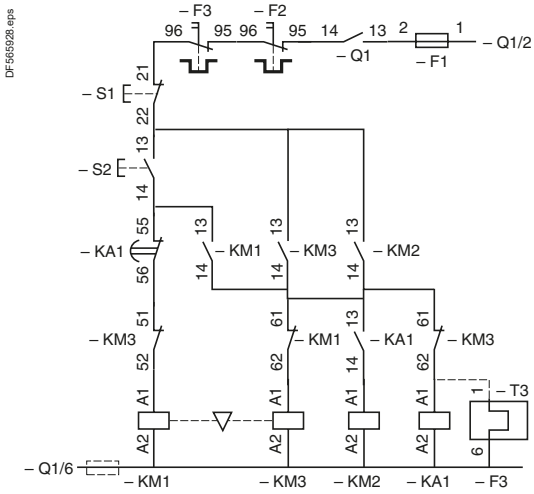

Operation

Starting is performed in 3 stages:
■ star connection of the auto-transformer is made by KM1, then contactor KM2 closes and the motor starts under reduced voltage
■ the neutral point is opened by KM1; part of the auto-transformer winding is switched into each phase for a short moment, constituting a stator starting inductance
■ KM3 switches the motor to full mains voltage and causes the auto-transformer to be shunted out of circuit by KM2.

The auto-transformer used generally has an air gap (adjusted or not) in order to obtain, during the second phase of starting, a series inductance whose value is compatible with correct starting.

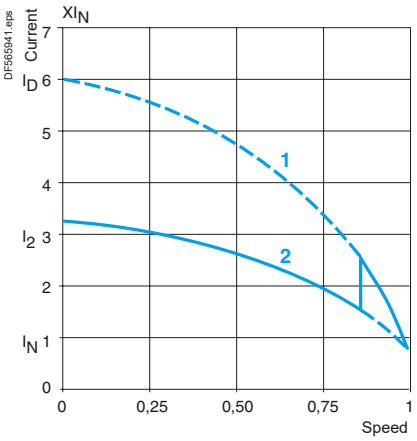

1 Direct switching current
2 Current with auto-transformer

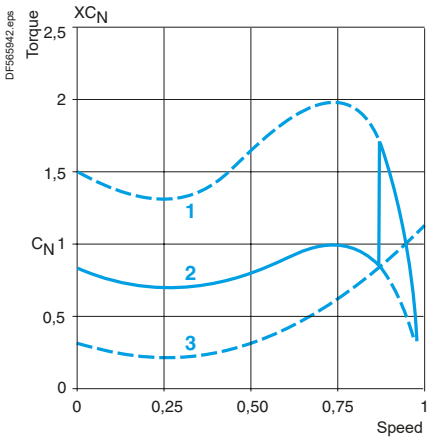

1 Direct motor torque
2 Torque with auto-transformer
3 Resistive torque of the machine

Life Is On Schneider Electric

TeSys contactors

For auto-transformer starting



Auto-transformer starters from 59 to 900 kW up to 440 V (type 1 coordination)

The components recommended in the table below have been determined according to the following characteristics:
- auto-transformer: on 0.65 Un connection with non adjusted air gap
- 3 starts per hour, of which 2 consecutive
- motor starting current: Id/In = 6
- Iq = 70 kA
- transient current on closing of KM3 ⩽ 7 $\sqrt{2}$ In
- maximum starting time: 30 seconds
- ambient temperature θ ⩽ 40 °C.

Switch-disconnector-fuses: operators and accessories, please consult your Regional Sales Office.
Contactors: 3-pole.
LC1 D: see pages B8/2 and B8/7,
LC1 F: please consult your Regional Sales Office,
LC1 B: please consult your Regional Sales Office.

Auxiliary contact blocks:
- for contactors LC1 D: one LAD N11 (1 N/O + 1 N/C) on KM1
- for contactors LC1 F: one LAD N22 (2 N/O + 2 N/C) on KM1, KM2 and KM3.

Thermal overload relays:
- LR: see pages B11/4 to B11/9
- LR9 D: see pages B11/5 to B11/9
- LR9 F: please consult your Regional Sales Office.

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3					Switch-disconnector-fuse Reference	aM fuses		Contactors			Overload relays	
						Size	Rating	KM3 LC1	KM2 LC1	KM1 LC1	Reference (1)	Setting range
220/ 230 V	380/ 400 V	415 V	440 V	In max								
kW	kW	kW	kW	A			A					A
30	55	59	59	105	**GS●K**	22 x 58	125	**D115**	**D115**	**D3210**	**LR9D5369**	90…150
											LRD4367	95…120
40	75	80	80	138	**GS●L**	T0	160	**D150**	**D115**	**D5011**	**LR9D5369**	90…150
											LRD4369	110…140
51	90	90	100	170	**GS●N**	T1	200	**F185**	**D115**	**D5011**	**LR9F5371**	132…220
63	110	110	110	205	**GS●N**	T1	250	**F225**	**D150**	**D8011**	**LR9F5371**	132…220
75	132	132	150	245	**GS●N**	T1	250	**F265**	**F185**	**D115**	**LR9F7375**	200…330
90	160	160	185	300	**GS●QQ**	T2	315	**F330**	**F265**	**D115**	**LR9F7375**	200…330
110	200	200	220	370	**GS●QQ**	T2	400	**F400**	**F330**	**D115**	**LR9F7379**	300…500
140	250	257	280	460	**GS2S**	T3	500	**F500**	**F400**	**D115**	**LR9F7379**	300…500
180	315	355	375	584	**GS2S**	T3	630	**F630**	**F400**	**D185**	**LR9F7381**	380…630
200	355	375	400	635	**GS2V**	T4	800	**F800**	**F500**	**F185**	**TC800/1 + LRD05**	505…800
220	400	425	450	710	**GS2V**	T4	800	**F800**	**F500**	**F265**	**TC800/1 + LRD05**	505…800
250	450	475	500	800	**GS2V**	T4	800	**F800**	**F500**	**F265**	**TC1000/1 + LRD05**	630…1000
280	500	530	560	900	**GS2V**	T4	1000	**BM33●22**	**F630**	**F330**	**TC1000/1 LRD05**	630…1000
315	560	600	630	1000	**GS2V**	T4	1000	**BM33●22**	**F630**	**F400**	**TC1250/1 LRD05**	790…1250
335	630	670	710	1100	**GS2V**	T4	1250	**BP33●22**	**F630**	**F400**	**TC1250/1 LRD05**	790…1250
400	710	750	800	1260	**On base**	T4	2 x 800 (2)	**BP33●22**	**F780**	**F400**	**TC1500/1 LRD05**	945…1500
450	800	800	800	1450	**On base**	T4	2 x 800 (2)	**BP33●22**	**F780**	**F400**	**TC1750/1 LRD05**	100…1750
500	900	900	900	1600	**On base**	T4	2 x 800 (2)	**BR33●22**	**F780**	**F500**	**TC2000/1 LRD05**	260…2000

(1) For power ratings greater than or equal to 400 kW at 415 V, use one LRD-05 on the current transformer.
(2) Check with the motor manufacturer whether the fuses should be fitted in parallel.

TeSys contactors

For rotor circuits of slip-ring motors

Applications

These contactors are used to eliminate starting resistance in the rotor circuit of slip-ring motors.

The most common application is for starters without inching and without rotor speed adjustment: pumps, fans, conveyors, compressors, ...

In the case of control by means of a manually operated master controller, the use of contactors with magnetic blow-out is recommended. Please consult your Regional Sales Office.

For hoisting applications, contactor selection must take into account the type of motor duty, the operating rate, the rotor voltage and current, the type of connection, the ambient temperature, etc.
Please consult your Regional Sales Office.

Operation

The rotor circuit contactors are interlocked with the stator contactor and therefore do not open until after the stator contactor has opened, when the rotor voltage has disappeared, or virtually disappeared.

They make the current corresponding to the normal starting peak (1.5 to 2.5 times the rated rotor current) and open the circuit under no-load. Making and breaking are easy.

Different types of rotor connection

Star connection



Delta connection



'V' connection



'W' connection



Contactor selection according to the type of connection

Rotor current and voltage coefficients

Coefficients to be applied to the operational current values shown in the table below.

Type of connection	Rotor I coefficient	3-phase rotor Ue (1)			
		Maximum		With counter-current	
	Operational I	LC1 F	LC1 B	LC1 F	LC1 B
Star	1	2000 V	2000 V	1000 V	1000 V
Delta	1.4	1700 V	1700 V	850 V	850 V
In V	1	1700 V	1700 V	850 V	850 V
In W	1.6	1700 V	1700 V	850 V	850 V

Selection according to the operational current

The selection examples below take into account:

- a ratio of 2 between the maximum operational rotor voltage (Uer) and the rated stator operational voltage (Ues). This ratio is given in standard IEC 60947-4,
- a guarantee of occasional duty (making and breaking capacities) specified in the above standards.

Time current flowing	Contactor rating										
	LC1 D150	LC1 F185	LC1 F265	LC1 F400	LC1 F500	LC1 F630	LC1 F780	LC1 BL	LC1 BM	LC1 BP	LC1 BR
Intermediate contactor: with number of operating cycles ≤ 30/h											
10 s	450 A	550 A	800 A	1100 A	1500 A	2000 A	2500 A	2000 A	2400 A	3750 A	5000 A
30 s	280 A	400 A	550 A	730 A	1000 A	1500 A	2000 A	1200 A	1800 A	2600 A	3600 A
60 s	220 A	300 A	400 A	550 A	750 A	1200 A	1500 A	1000 A	1500 A	2200 A	3000 A
Intermediate contactor: with number of operating cycles ≤ 60/h											
5 s	450 A	550 A	800 A	1100 A	1500 A	2000 A	2500 A	2000 A	2400 A	3750 A	5000 A
10 s	330 A	450 A	620 A	860 A	1250 A	1800 A	2300 A	1600 A	2200 A	3400 A	4500 A
30 s	220 A	300 A	400 A	550 A	750 A	1200 A	1500 A	1000 A	1500 A	2200 A	3000 A
Intermediate contactor: with number of operating cycles ≤ 150/h for LC1 F and 120/h for LC1 B											
5 s	300 A	420 A	580 A	820 A	1150 A	1650 A	2200 A	1500 A	2100 A	3200 A	4200 A
10 s	250 A	350 A	430 A	600 A	850 A	1300 A	1600 A	1100 A	1600 A	2300 A	3200 A
Rotor short-circuit contactor and intermediate contactor: with number of operating cycles > 150/h for LC1 F and 120/h for LC1 B											
–	200 A	270 A	350 A	500 A	700 A	1000 A	1600 A	800 A	1250 A	2000 A	2750 A
Electrical durability											
For automatic starting, the electrical durability is in the region of 1 million operating cycles.											

(1) For use up to 3000 V, please consult your Regional Sales Office.

Voltage drop caused by the inrush current

When the operating coil of a contactor is energised, the inrush current produces a voltage drop in the control circuit cable caused by the resistance of the conductors, which can adversely affect closing of the contactor.
An excessive voltage drop in the control supply cables (both a.c. and d.c.) can lead to non closure of the contactor poles or even destruction of the coil due to overheating.
This phenomenon is aggravated by:
- a long line
- a low control circuit voltage
- a cable with a small c.s.a.
- a high inrush power drawn by the coil.

The maximum length of cable, depending on the control voltage, the inrush power and the conductor c.s.a., is indicated in the graphs below.

Remedial action

To reduce the voltage drop at switch-on:
- increase the conductor c.s.a.
- use a higher control circuit voltage
- use an intermediate control relay.

These graphs are for a maximum line voltage drop of 5 %. They give a direct indication of the copper conductor c.s.a. to be used for the control cable, depending on its length, the inrush power drawn by the contactor coil and the control circuit voltage (see example page A6/55).

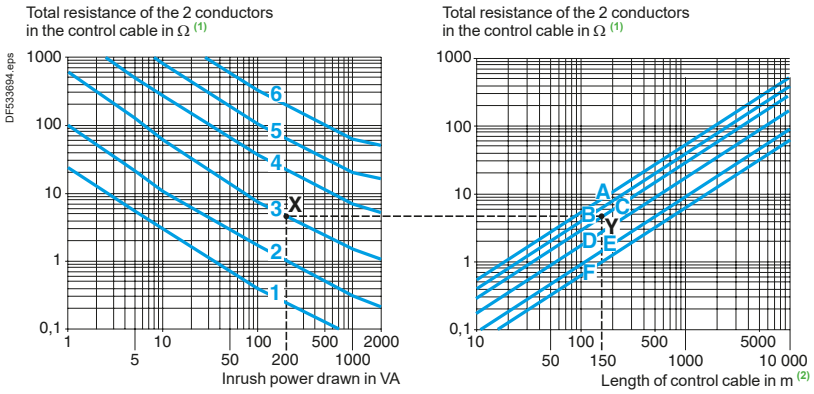

1 ∼ 24 V	3 ∼ 115 V	5 ∼ 400 V

C.s.a. of copper cables		
A 0.75 mm²	C 1.5 mm²	E 4 mm²

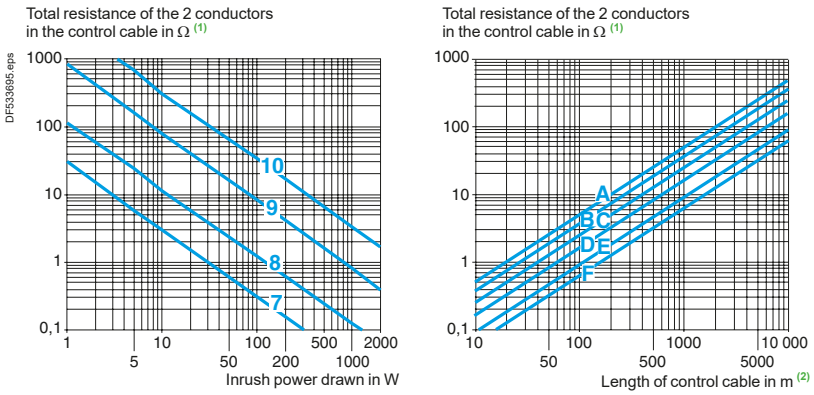

2 ∼ 48 V	4 ∼ 230 V	6 ∼ 690 V

B 1 mm²	D 2.5 mm²	F 6 mm²

7 ⎓ 24 V	9 ⎓ 125 V
8 ⎓ 48 V	10 ⎓ 250 V

C.s.a. of copper cables		
A 0.75 mm²	C 1.5 mm²	E 4 mm²
B 1 mm²	D 2.5 mm²	F 6 mm²

(1) For 3-wire control, the current only flows in 2 of the conductors.
(2) This is the length of the cable comprising 2 or 3 conductors. (Distance between the contactor and the control device).

Voltage drop caused by the inrush current

What cable c.s.a. is required for the control circuit of an LC1 D40A, 115 V contactor, operated from a distance of 150 metres?

■ Contactor LC1 D40A, voltage 115 V, 50 Hz: inrush power: 200 VA.

On the left-hand graph on the page opposite, point X is at the intersection of the vertical line corresponding to 200 VA and the ∿ 115 V voltage curve.

On the right-hand graph on the page opposite, point Y is at the intersection of the vertical line corresponding to 150 m and the horizontal line passing through point X.

Use the conductor c.s.a. indicated by the curve which passes through point Y, i.e.: 1.5 mm^2.

If point Y lies between two c.s.a. curves, choose the larger of the c.s.a. values.

Calculating the maximum cable length

The maximum permissible length for acceptable line voltage drop is calculated by the formula:

$$L = \frac{U^2}{SA} .s.K$$

where:

L : distance between the contactor and the control device in m (length of the cable)
U : supply voltage in V
SA : apparent inrush power drawn by the coil in VA
s : conductor c.s.a. in mm^2
K : factor given in the table below.

a.c. supply	**SA in VA**	**20**	**40**	**100**	**150**	**200**
	K	1.38	1.5	1.8	2	2.15

d.c. supply	Irrespective of the apparent inrush power SA, expressed in W
	K = 1.38

Residual current in the coil due to cable capacitance

When the control contact of a contactor is opened, the control cable capacitance is effectively in series with the coil of the electromagnet. This capacitance can cause a residual current to be maintained in the coil, with the risk that the contactor will remain closed.

This only applies to contactors operating on an a.c. supply.

This phenomenon is aggravated by:
- a long line length between the coil control contact and the contactor, or between the coil control contact and the power supply,
- a high control circuit voltage,
- a low coil consumption, sealed,
- a low value of contactor drop-out voltage.

The maximum control cable length, according to the contactor coil supply voltage, is indicated in the graph on the page opposite.

Remedial action

Various solutions can be adopted to avoid the risk of the contactor remaining closed due to cable capacitance:
- use a d.c. control voltage, or
- add a rectifier, connected as shown in the scheme below, but retaining an a.c. operating coil: in this way, rectified a.c. current flows in the control cable.

When calculating the maximum cable length, take the resistance of the conductors into account.

.

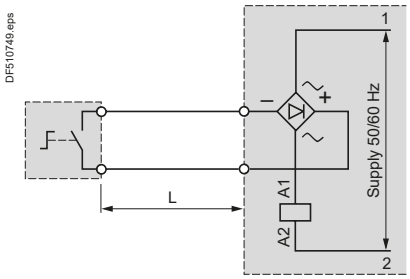

- Connect a resistor in parallel with the contactor coil (1).

Value of the resistance:

$$R\,\Omega = \frac{1}{10^{-3}\,C\,(\mu F)}$$ (C capacitance of the control cable)

Power to be dissipated:

$$PW = \frac{U^2}{R}$$

(1) To avoid increasing the voltage drop due to inrush current, this resistor must be brought into operation after the contactor has closed by using an N/O contact.

Residual current in the coil due to cable capacitance

These graphs are for a capacitance, between 2 conductors, of 0.2 µF/km. They make it possible to determine whether there is a risk of the contactor remaining closed due to the power drawn by the coil when sealed, as well as the control circuit voltage, according to the length of the control cable.

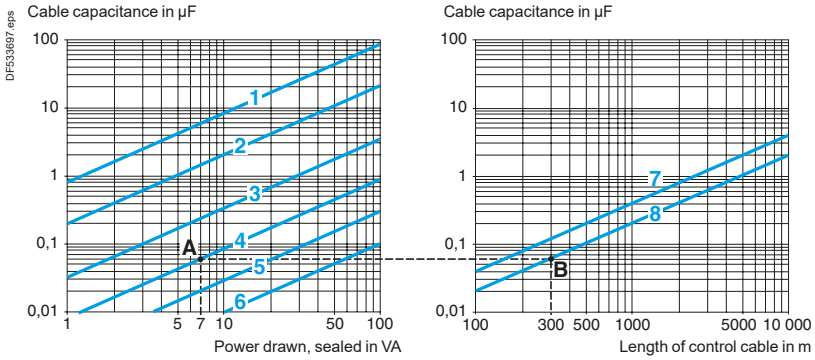

1	∼ 24 V	3	∼ 115 V	5	∼ 400 V	7	3-wire control
2	∼ 48 V	4	∼ 230 V	6	∼ 690 V	8	2-wire control

In the zones below the straight lines for 3-wire and 2-wire control respectively, there is a risk of the contactor remaining closed.

Examples

What is the maximum length for the control cable of an LC1 D12 contactor, operating on 230 V, with 2-wire control?

■ Contactor LC1 D12, voltage 230 V, 50 Hz: power sealed 7 VA.

On the left-hand graph, point A is at the intersection of the vertical line for 7 VA with the ∼ 230 V voltage curve.

On the right-hand graph, point B is at the intersection of the horizontal line with the 2-wire control curve.

The maximum cable length is therefore 300 m.

In the same example, with a 600 m cable, the point lies in the risk zone. A resistor must therefore be connected in parallel with the contactor coil.

$$R = \frac{1}{10^{-3} \cdot C} = \frac{1}{10^{-3} \cdot 0.12} = 8.3\ \Omega$$

Value of this resistance:

$$P = \frac{U^2}{R} = \frac{(220)^2}{8300} = 6\ W$$

Power to be dissipated:

Alternative solution: use a d.c. control supply.

Calculating the cable length

The maximum permitted length of control cable to avoid the effects of capacitance is calculated using the formula:

$$L = 455 \cdot \frac{S}{U^2.Co}$$

L : distance between the contactor and the control device in km (length of the cable),
S : apparent power, sealed, in VA,
U : control voltage in V,
Co : line capacitance of the cable in µF/km.

Technical information

Current of asynchronous squirrel cage motors at nominal load

3-phase 4-pole motors

Current values for power in kW

Rated operational power (1)	Indicative rated operational current values at:			
	230 V	400 V	500 V	690 V
kW	A			
0.06	0.35	0.2	0.16	0.12
0.09	0.52	0.3	0.24	0.17
0.12	0.7	0.44	0.32	0.23
0.18	1	0.6	0.48	0.35
0.25	1.5	0.85	0.68	0.49
0.37	1.9	1.1	0.88	0.64
0.55	2.6	1.5	1.2	0.87
0.75	3.3	1.9	1.5	1.1
1.1	4.7	2.7	2.2	1.6
1.5	6.3	3.6	2.9	2.1
2.2	8.5	4.9	3.9	2.8
3	11.3	6.5	5.2	3.8
4	15	8.5	6.8	4.9
5.5	20	11.5	9.2	6.7
7.5	27	15.5	12.4	8.9
11	38	22	17.6	12.8
15	51	29	23	17
18.5	61	35	28	21
22	72	41	33	24
30	96	55	44	32
37	115	66	53	39
45	140	80	64	47
55	169	97	78	57
75	230	132	106	77
90	278	160	128	93
110	340	195	156	113
132	400	230	184	134
160	487	280	224	162
200	609	350	280	203
250	748	430	344	250
315	940	540	432	313
355	1061	610	488	354
400	1200	690	552	400
500	1478	850	680	493
560	1652	950	760	551
630	1844	1060	848	615
710	2070	1190	952	690
800	2340	1346	1076	780
900	2640	1518	1214	880
1000	2910	1673	1339	970

Current values for power in hp

Rated operational power (2)	Indicative rated operational current values at:						
	110 - 120 V	200 V	208 V	220 - 240 V	380 - 415 V	440 - 480 V	550 - 600 V
hp	A						
1/2	4.4	2.5	2.4	2.2	1.3	1.1	0.9
3/4	6.4	3.7	3.5	3.2	1.8	1.6	1.3
1	8.4	4.8	4.6	4.2	2.3	2.1	1.7
1 1/2	12	6.9	6.6	6	3.3	3	2.4
2	13.6	7.8	7.5	6.8	4.3	3.4	2.7
3	19.2	11	10.6	9.6	6.1	4.8	3.9
5	30.4	17.5	16.7	15.2	9.7	7.6	6.1
7 1/2	44	25.3	24.2	22	14	11	9
10	56	32.2	30.8	28	18	14	11
15	84	48.3	46.2	42	27	21	17
20	108	62.1	59.4	54	34	27	22
25	136	78.2	74.8	68	44	34	27
30	160	92	88	80	51	40	32
40	208	120	114	104	66	52	41
50	260	150	143	130	83	65	52
60	-	177	169	154	103	77	62
75	-	221	211	192	128	96	77
100	-	285	273	248	165	124	99
125	-	359	343	312	208	156	125
150	-	414	396	360	240	180	144
200	-	552	528	480	320	240	192
250	-	-	-	604	403	302	242
300	-	-	-	722	482	361	289
350	-	-	-	828	560	414	336
400	-	-	-	954	636	477	382
450	-	-	-	1030	–	515	412
500	-	-	-	1180	786	590	472

(1) Values conforming to standard IEC 60072-1 (at 50 Hz).
(2) Values conforming to standard UL 508 (at 60 Hz).

***Note:** These values are given as a guide. They may vary depending on the type of motor, its polarity and the manufacturer.*

Life Is On Schneider Electric

Standardisation

Conformity to standards

Schneider Electric products satisfy, in the majority of cases, national (for example: BS in Great Britain, NF in France, DIN in Germany), European (for example: CENELEC) or international (IEC) standards. These product standards precisely define the performance of the designated products (such as IEC 60947 series for low voltage equipment).
When used correctly, as designated by the manufacturer and in accordance with regulations and correct practices, these products will allow users to build equipment, machine systems or installations that conform to their appropriate standards (for example: IEC 60204-1, relating to electrical equipment used on industrial machines).
Schneider Electric is able to provide proof of conformity of its production to the standards it has chosen to comply with, through its quality assurance system.
On request, and depending on the situation, Schneider Electric can provide the following:

- a declaration of conformity,
- a certificate of conformity (CB certificate, Asefa/Lovag),
- a homologation certificate or approval, in the countries where this procedure is required or for particular specifications, such as those existing in the merchant navy.

Standard	Certification authority		Country
	Name	Regulation authority	
ANSI	American National Standards Institute	ANSI	USA
BS	British Standards Institution	BSI	Great Britain
CEI	Comitato Elettrotecnico Italiano	CEI	Italy
DIN/VDE	Verband Deutscher Electrotechniker	VDE	Germany
EN	Comité Européen de Normalisation Electrotechnique	CENELEC	Europe
TR Regulation	Eurasian Customs Union	EAC	Russia, Belarus, Kazakhstan
IEC	International Electrotechnical Commission	IEC	Worldwide
JIS	Japanese Industrial Standards Committee	JISC	Japan
NBN	Institut Belge de Normalisation	IBN	Belgium
NEN	Nederlands Normalisatie Institut	NNI	Netherlands
NF	Union Technique de l'Electricité	UTE	France
SAA	Standards Association of Australia	SAA	Australia
UNE	Asociacion Española de Normalizacion y Certificacion	AENOR	Spain

European EN standards

These are technical specifications established in conjunction with, and with approval of, the relative bodies within the various CENELEC member countries (European Union, European Free Trade Association and many central and eastern European countries having «member» or «affiliated» status). Prepared in accordance with the principle of consensus, the European standards are the result of a weighted majority vote. Such adopted standards are then integrated into the national collection of standards, and contradictory national standards are withdrawn.
European standards incorporated within the French collection of standards carry the prefix NF EN. At the 'Union Technique de l'Electricité' *(Technical Union of Electricity)* (UTE), the French version of a corresponding European standard carries a dual number: European reference (NF EN …) and classification index (C …).
Therefore, the standard NF EN 60947-4-1 relating to motor contactors and starters, effectively constitutes the French version of the European standard EN 60947-4-1 and carries the UTE classification C 63-110.
This standard is identical to the British standard BS EN 60947-4-1 or the German standard DIN EN 60947-4-1.
Whenever reasonably practical, European standards reflect the international standards (IEC).
With regard to automation system components and distribution equipment, in addition to complying with the requirements of French NF standards, Schneider Electric brand components conform to the standards of all other major industrial countries.

Regulations

European Directives

Opening up of European markets assumes harmonisation of the regulations pertaining to each of the member countries of the European Union.
The purpose of the European Directive is to eliminate obstacles hindering the free circulation of goods within the European Union, and it must be applied in all member countries. Member countries are obliged to transcribe each Directive into their national legislation and to simultaneously withdraw any contradictory regulations. The Directives, in particular those of a technical nature which concern us, only establish the objectives to be achieved, referred to as "essential requirements".
The manufacturer must take all the necessary measures to ensure that his products conform to the requirements of each Directive applicable to his production.
As a general rule, the manufacturer certifies conformity to the essential requirements of the Directive(s) for his product by affixing the CE marking.
The CE marking is affixed to Schneider Electric brand products concerned, in order to confirm compliance with French and European regulations.

Significance of the CE marking

- The CE marking affixed to a product signifies that the manufacturer declares that the product conforms to the relevant European Directive(s) which concern it; this condition must be met to allow free distribution and circulation within the countries of the European Union of any product subject to one or more of the E.U. Directives.
- The CE marking is intended solely for national market control authorities.
- The CE marking must not be confused with a conformity mark.

Technical information

Product standards and certifications

European Directives

For electrical equipment, only conformity to standards signifies that the product is suitable for its designated function, and only the guarantee of an established manufacturer can provide a high level of quality assurance.
For Schneider Electric brand products, one or several Directives are likely to be applicable, depending on the product, and in particular:

- the Low Voltage Directive 2014/35/EU: the CE marking relating to this Directive has been compulsory since April 2016.
- the Electromagnetic Compatibility Directive 2014/30/EU: the CE marking on products covered by this Directive has been compulsory since April 2016.

CB certificate, Asefa/Lovag certificate

- CB certification is issued according to IEC standards in respect to a multilateral agreement between almost industrial countries called CB scheme. It allows international certification of electrical and electronic products so that a single certification facilitates a worldwide market access.
- The function of ASEFA (Association des Stations d'Essais Française d'Appareils électriques - *Association of French Testing Stations for Low Voltage Industrial Electrical Equipment)* is to carry out tests of conformity to standards and to issue certificates of conformity and test reports. ASEFA laboratories are authorised by the French authorisation committee (COFRAC).
  ASEFA is now a member of the European agreement group LOVAG (Low Voltage Agreement Group). This means that any certificates issued by LOVAG/ASEFA are recognised by all the authorities which are members of the group and carry the same validity as those issued by any of the member authorities.

Quality labels

When components can be used in domestic and similar applications, it is sometimes recommended that a "Quality label" be obtained, which is a form of certification of conformity.

Code	Quality label	Country
CEBEC	Comité Electrotechnique Belge	Belgium
KEMA-KEUR	Keuring van Electrotechnische Materialen	Netherlands
NF	Union Technique de l'Electricité	France
ÖVE	Österreichischer Verband für Electrotechnik	Austria
SEMKO	Svenska Electriska Materiel Kontrollanatalten	Sweden

Product certifications

In some countries, the certification of certain electrical components is a legal requirement. In this case, a certificate of conformity to the standard is issued by the official test authority.
Each certified device must bear the relevant certification symbols when these are mandatory:

Code	Certification authority	Country
CSA	Canadian Standards Association	Canada
UL	Underwriters Laboratories	USA
CCC	China Compulsory Certification	China

Note on certifications issued by the Underwriters Laboratories (UL). There are two levels of approval:

"Recognized" ( ) The component is fully approved for inclusion in equipment built in a workshop, where the operating limits are known by the equipment manufacturer and where its use within such limits is acceptable by the Underwriters Laboratories.
The component is not approved as a "Product for general use" because its manufacturing characteristics are incomplete or its application possibilities are limited.
A "Recognized" component does not necessarily carry the certification symbol.

"Listed" (UL) The component conforms to all the requirements of the classification applicable to it and may therefore be used both as a "Product for general use" and as a component in assembled equipment. A "Listed" component must carry the certification symbol.

Marine classification societies

Prior approval (= certification) by certain marine classification societies is generally required for electrical equipment which is intended for use on board merchant vessels.

Standard	Classification authority	Country
ABS	American Bureau of Shipping	Unites States of America
KRoS	Korean register of Shipping	South Korea
BV	Bureau Veritas	France
DNV-GL	Det Norske Veritas - Germanischer Lloyd	Norway - Germany
LRoS	Lloyd's Register of Shipping	Great Britain
NKK	Nippon Kaiji Kyokaï	Japan
RINA	Registro Italiano Navale	Italy
RRS	Register of Shipping	Russia

***Note:** for further details on a specific product, please refer to the "Characteristics" pages in this catalogue or consult your Regional Sales Office.*

Technical information

Protective treatment of equipment according to climatic environment

Depending on the climatic and environmental conditions in which the equipment is placed, Schneider Electric can offer specially adapted products to meet your requirements.

In order to make the correct choice of protective finish, two points should be remembered:
- the prevailing climate of the country is never the only criterion,
- only the atmosphere in the immediate vicinity of the equipment need be considered.

All climates treatment “TC”

This is the standard treatment for Schneider-electric brand equipment and is suitable for the vast majority of applications. It is the equivalent of treatments described as “Klimafest”, “Climateproof”.
In particular, it meets the requirements specified in the following publications:
- Publication UTE C 63-100 (method I), successive cycles of humid heat at: +40 °C and 95 % relative humidity.
- DIN 50016 - Variations of ambient conditions within a climatic chamber: +23 °C and 83 % relative humidity, +40 °C and 92 % relative humidity.

It also meets the requirements of the following marine classification societies: BV-LR-GL-DNV-RINA.

Characteristics

- Steel components are usually treated with zinc. When they have a mechanical function, they may also be painted.
- Insulating materials are selected for their high electrical, dielectric and mechanical characteristics.
- Metal enclosures have a stoved paint finish, applied over a primary phosphate protective coat, or are galvanised (e.g. some prefabricated busbar trunking components).

Limits for use of “TC” (All climates) treatment

- “TC” treatment is suitable for the following temperatures and humidity:

Temperature (°C)	Relative humidity (%)
20	95
40	80
50	50

“TC” treatment is therefore suitable for all latitudes and in particular tropical and equatorial regions where the equipment is mounted in normally ventilated industrial premises. Being sheltered from external climatic conditions, temperature variations are small, the risk of condensation is minimised and the risk of dripping water is virtually non-existent.

Extension of use of “TC” (All climates) treatment

In cases where the humidity around the equipment exceeds the conditions described above, or in equatorial regions if the equipment is mounted outdoors, or if it is placed in a very humid location (laundries, sugar refineries, steam rooms, etc.), “TC” treatment can still be used if the following precautions are taken:
- The enclosure in which the equipment is mounted must be protected with a “TH” finish (see next page) and must be well ventilated to avoid condensation and dripping water (e.g. enclosure base plate mounted on spacers).
- Components mounted inside the enclosure must have a “TC” finish.
- If the equipment is to be switched off for long periods, a heater must be provided (0.2 to 0.5 kW per square decimetre of enclosure), that switches on automatically when the equipment is turned off. This heater keeps the inside of the enclosure at a temperature slightly higher than the outside surrounding temperature, thereby avoiding any risk of condensation and dripping water (the heat produced by the equipment itself during normal running is sufficient to provide this temperature difference).
- Special considerations for “Operator dialog” and “Detection” products: for certain pilot devices, the use of “TC” treatment can be extended to outdoor use provided their enclosure is made of light alloys, zinc alloys or plastic material. In this case, it is also essential to ensure that the degree of protection against penetration of liquids and solid objects is suitable for the applications involved.

Technical information

Protective treatment of equipment according to climatic environment

"TH" treatment for hot and humid environments

This treatment is suitable for hot and humid atmospheres where installations are regularly subject to condensation, dripping water and the risk of fungi.

In addition, plastic insulating components are resistant to attacks from insects such as termites and cockroaches. These properties have often led to this treatment being described as "Tropical Finish", but this does not mean that all equipment installed in tropical and equatorial regions must systematically have undergone "TH" treatment. On the other hand, certain operating conditions in temperate climates may well require the use of "TH" treated equipment (see limitations for use of "TC" treatment).

Special characteristics of "TH" treatment

■ All insulating components are made of materials which are either resistant to fungi or treated with a fungicide, and which have increased resistance to creepage (Standards IEC 60112, NF C 26-220, DIN 5348).
■ Metal enclosures receive a top-coat of stoved, fungicidal paint, applied over a rust inhibiting undercoat. Components with "TH" treatment may be subject to a surcharge (1). Please consult your Regional Sales Office.

Protective treatment selection guide

Surrounding environment	Duty cycle	Internal heating of enclosure when not in use	Type of climate	Protective treatment of equipment	Protective treatment of enclosure
Indoors					
No dripping water or condensation	Unimportant	Not necessary	Unimportant	"TC"	"TC"
Presence of dripping water or condensation	Frequent switching off for periods of more than 1 day	No	Temperate	"TC"	"TH"
			Equatorial	"TH"	"TH"
		Yes	Unimportant	"TC"	"TH"
	Continuous	Not necessary	Unimportant	"TC"	"TH"
Outdoors (sheltered)					
No dripping water or dew	Unimportant	Not necessary	Temperate	"TC"	"TC"
			Equatorial	"TH"	"TH"
Exposed outdoors or near the sea					
Frequent and regular presence of dripping water or dew	Frequent switching off for periods of more than 1 day	No	Temperate	"TC"	"TH"
			Equatorial	"TH"	"TH"
		Yes	Unimportant	"TC"	"TH"
	Continuous	Not necessary	Unimportant	"TC"	"TH"

These treatments cover, in particular, the applications defined by methods I and II of guide UTE C 63-100.

Special precautions for electronic equipment

Electronic products always meet the requirements of "TC" treatment. A number of them are "TH" treated as standard.

Some electronic products (for example: programmable controllers, flush mountable controllers CCX and flush mountable operator terminals XBT) require the use of an enclosure providing a degree of protection to at least IP 54, as defined by standards IEC 60664 and NF C 20 040, for use in industrial applications or in environmental conditions requiring "TH" treatment.

These electronic products, including flush mountable products, must have a degree of protection to at least IP 20 (provided either by their own enclosure or by their installation method) for restricted access locations where the degree of pollution does not exceed 2 (a test booth not containing machinery or other dust producing activities, for example).

Special treatments

For particularly harsh industrial environments, Schneider Electric is able to offer special protective treatments. Please consult your Regional Sales Office.

(1) A large number of the Schneider electric brand products are "TH" treated as standard and are, therefore, not subject to a surcharge.

Technical information

Degrees of protection provided by enclosures IP code

Degrees of protection against the penetration of solid bodies, water and personnel access to live parts

The European standard EN 60529 dated October 1991, IEC publication 529 (2nd edition - November 1989), defines a coding system (IP code) for indicating the degree of protection provided by electrical equipment enclosures against accidental direct contact with live parts and against the ingress of solid foreign objects or water. This standard does not apply to protection against the risk of explosion or conditions such as humidity, corrosive gasses, fungi or vermin.
Certain equipment is designed to be mounted on an enclosure which will contribute towards achieving the required degree of protection (example : control devices mounted on an enclosure).
Different parts of an equipment can have different degrees of protection (example : enclosure with an opening in the base).
Standard NF C 15-100 (May 1991 edition), section 512, table 51 A, provides a cross-reference between the various degrees of protection and the environmental conditions classification, relating to the selection of equipment according to external factors.
Practical guide UTE C 15-103 shows, in the form of tables, the characteristics required for electrical equipment (including minimum degrees of protection), according to the locations in which they are installed.

IP ●●● code

The IP code comprises **2 characteristic numerals** (e.g. **IP 55**) and may include **an additional letter** when the actual protection of personnel against direct contact with live parts is better than that indicated by the first numeral (e.g. IP 20C).
Any characteristic numeral which is unspecified is replaced by an X (e.g. IP XXB).

1st characteristic numeral

corresponds to protection of the equipment against penetration of solid objects and protection of personnel against direct contact with live parts.

	Protection of the equipment		Protection of personnel
0	Non-protected		Non-protected
1	Ø 50 mm	Protected against the penetration of solid objects having a diameter greater than or equal to 50 mm	Protected against direct contact with the back of the hand (accidental contacts).
2	Ø 12,5 mm 	Protected against the penetration of solid objects having a diameter greater than or equal to 12.5 mm.	Protected against direct finger contact.
3	Ø 2,5 mm 	Protected against the penetration of solid objects having a diameter greater than or equal to 2.5 mm.	Protected against direct contact with a Ø2.5 mm tool.
4	Ø 1 mm 	Protected against the penetration of solid objects having a diameter greater than or equal to 1 mm.	Protected against direct contact with a Ø1 mm wire.
5		Dust protected (no harmful deposits).	Protected against direct contact with a Ø1 mm wire.
6		Dust tight.	Protected against direct contact with a Ø1 mm wire.

2nd characteristic numeral

corresponds to protection of the equipment against penetration of water with harmful effects.

0	Non-protected	
1		Protected against vertical dripping water, (condensation).
2		Protected against dripping water at an angle of up to 15°.
3		Protected against rain at an angle of up to 60°.
4		Protected against splashing water in all directions.
5		Protected against water jets in all directions.
6		Protected against powerful jets of water and waves.
7		Protected against the effects of temporary immersion.
8		Protected against the effects of prolonged immersion under specified conditions.

Additional letter

corresponds to protection of personnel against direct contact with live parts.

A	With the back of the hand.
B	With the finger.
C	With a Ø2.5 mm tool.
D	With a Ø1 mm wire.

Technical information

Degrees of protection provided by enclosures IK code

Degrees of protection against mechanical impact

The European standard EN 50102 dated March 1995 defines a coding system (IK code) for indicating the degree of protection provided by electrical equipment enclosures against external mechanical impact.
Standard NF C 15-100 (May 1991 edition), section 512, table 51 A, provides a cross-reference between the various degrees of protection and the environmental conditions classification, relating to the selection of equipment according to external factors.
Practical guide UTE C 15-103 shows, in the form of tables, the characteristics required for electrical equipment (including minimum degrees of protection), according to the locations in which they are installed.

IK ●● code

The IK code comprises **2 characteristic numerals** (e.g. **IK 05**).

2 characteristic numerals

corresponding to a value of impact energy.

		h (cm)	Energy (J)
00	Non-protected		
01		7.5	0.15
02		10	0.2
03		17.5	0.35
04		25	0.5
05		35	0.7
06		20	1
07		40	2
08		30	5
09		20	10
10		40	20

Life Is On Schneider Electric