Dimensions

GV2 ME



GV AX



GV AD, AM, AN, AU, AS, AX



GV AE



	b
GV2 ME●●	89
GV2 ME●●3	101

(1) Maximum
X1 Electrical clearance = 40 mm for Ue ≤ 690 V

GV2 P

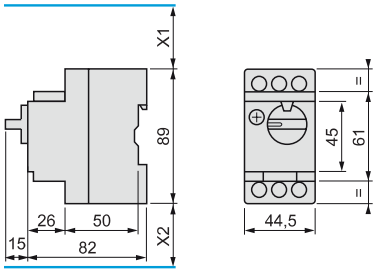

GV AD, AM, AN, AU, AS



GV2 AK00



(1) Maximum
X1 Electrical clearance = 40 mm for Ue ≤ 415 V, or 80 mm for Ue = 440 V,
or 120 mm for Ue = 500 and 690 V
X2 = 40 mm

GV2 GH7



Mounting

GV2 ME

On 35 mm ⊥⊥ rail



On panel with adapter plate GV2 AF02





On pre-slotted plate AM1 PA



On rails DZ5 MB201



c = 78.5 on AM1 DP200 (35 x 7.5)
c = 86 on AM1 DE200, ED200 (35 x 15)

GV2 P

On rail AM1 DE200, ED200 (35 x 15)



Panel mounted



On pre-slotted plate AM1 PA



Adapter plate GK2 AF01





Dimensions

GV2 AF01

Combination GV2 ME + TeSys k contactor





GV2 AF3

Combination GV2 ME + TeSys d contactor



Combination GV2 P + TeSys d contactor

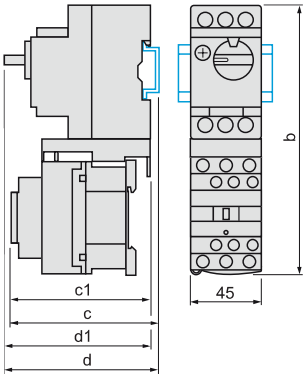

GV2 ME +	LC1 D09 ...D18	LC1 D25 and D32
b	176.4	186.8
c1	94.1	100.4
c	99.6	105.9

GV2 P +	LC1 D09 ...D18	LC1 D25 and D32
b	176.4	186.8
c1	100.1	106.4
c	105.6	111.9
d1	95	95
d	100.5	100.5

3

Dimensions *(continued)*

GV2 AF4 + LAD 311

Combination GV2 ME + TeSys d contactor

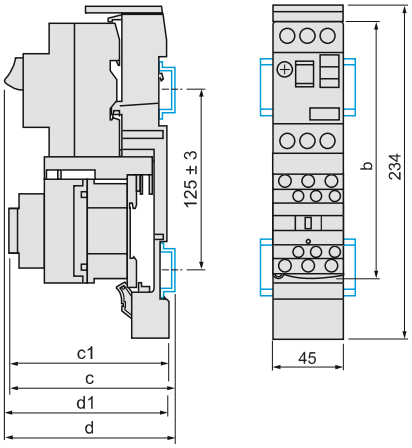

GV2 ME +	LC1 D09…D18	LC1 D25 and D32
b	176.4	186.8
c1	103.1	136.4
c	135.6	141.9
d1	107	107
d	112.5	112.5

Combination GV2 P + TeSys d contactor

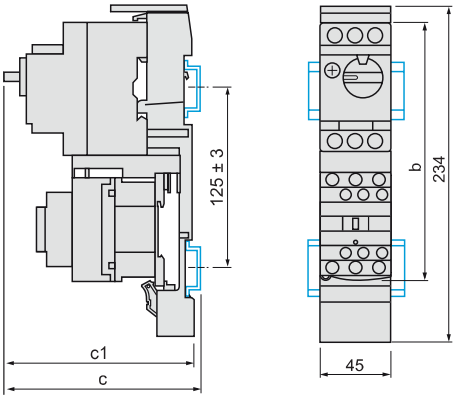

GV2 P +	LC1 D09…D18	LC1 D25 and D32
b	176.4	186.8
c1	136.5	142.4
c	141.6	147.9

GV2 ME + GV1 L3 (current limiter)

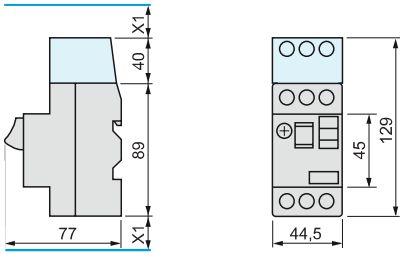

X1 = 10 mm for Ue = 230 V
or 30 mm for 230 V < Ue ≤ 690 V

7.5 mm height compensation plate GV1 F03



Mounting

Mounting of external operator GV2 APN01, GV2 APN02 or GV2 APN04 for motor circuit-breakers GV2 P

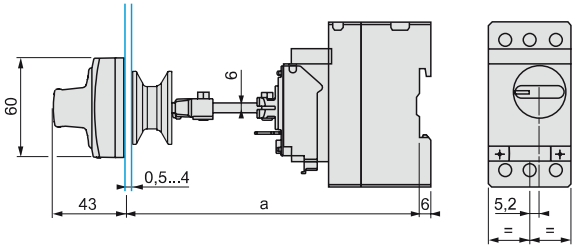

Door cut-out



***(1)** For IP65 only.*

Mounting of external operator GV APH02 for motor circuit-breakers GV2 P

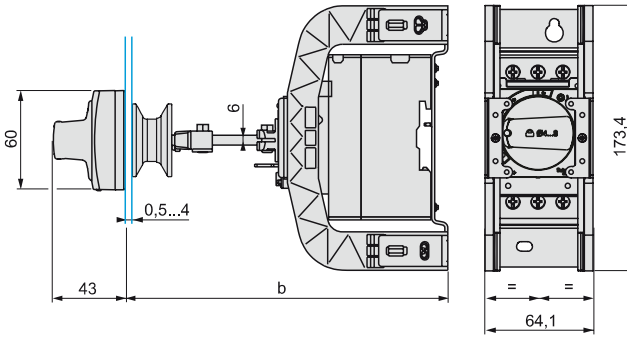

Door cut-out



***(1)** For IP65 only.*

	a		b	
	Mini	**Maxi**	**Mini**	**Maxi**
GV2 APN●●	140	250		
GV2 APN●● + GV APH02			151	250
GV2 APN●● + GV APK11	250	434	-	-
GV2 APN●● + GV APH02 + GV APK11	-	-	250	445

GV2 ME, GV2 P

Sets of busbars GV2 G445, GV2 G454, GV2 G472, with terminal block GV2 G05

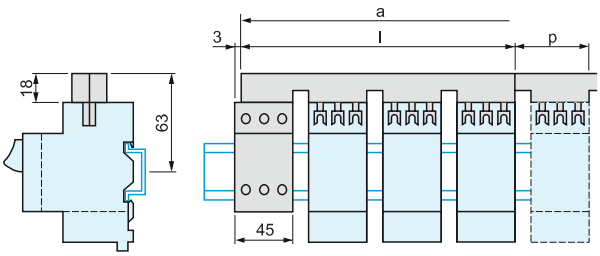

	l	p
GV2 G445 (4 x 45 mm)	179	45
GV2 G454 (4 x 54 mm)	206	54
GV2 G472 (4 x 72 mm)	260	72

	a			
Number of tap-offs	**5**	**6**	**7**	**8**
GV2 G445	224	269	314	359
GV2 G454	260	314	368	422
GV2 G472	332	404	476	548

Sets of busbars GV2 G●●● with terminal block GV1 G09

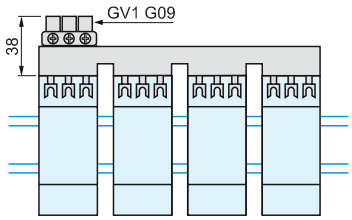

	l
GV2 G245 (2 x 45 mm)	89
GV2 G254 (2 x 54 mm)	98
GV2 G272 (2 x 72 mm)	116

Sets of busbars GV2 G245, GV2 G254, GV2 G272



Sets of busbars GV2 G554

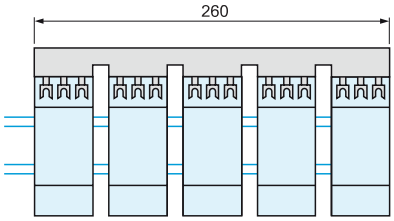

	l
GV2 G345 (3 x 45 mm)	134
GV2 G354 (3 x 54 mm)	152

Sets of busbars GV2 G345 and GV2 G354



GV2 RT

Dimensions

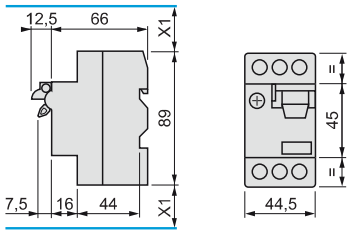

X1: Electrical clearance = 40 mm for Ue < 690 V

Mounting

Mounting of external operator GV2 AP03

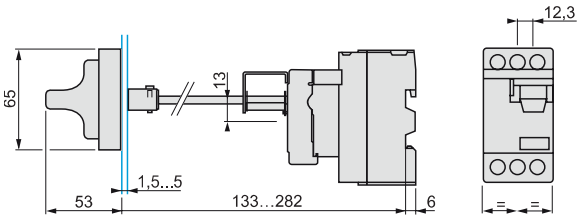

On 35 mm ⎓ rail

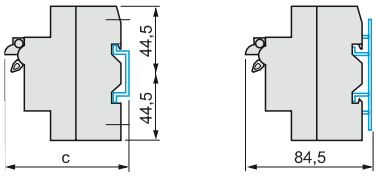

On panel with adapter plate GV2 AF02



On pre-slotted plate AM1 PA



On rails DZ5 MB



c = 80 on AM1 DP200 (35 x 7.5)
c = 88 on AM1 DE200, ED200 (35 x 15)

GV3 P

Dimensions

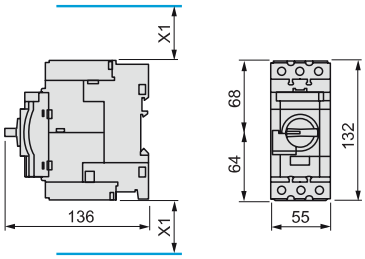



X1 = Electrical clearance (ISC max)
40 mm for Ue ≤ 500 V, 50 mm for Ue ≤ 690 V

(1) Blocks GV AN●● , GV AD●● and GV AM11
(2) Blocks GV3 AU●● and GV3 AS●●

Note: *Leave a gap of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.*
Horizontal mounting is possible up to 40 °C

Mounting

Mounting with TeSys contactor LC1 D40A…D65A

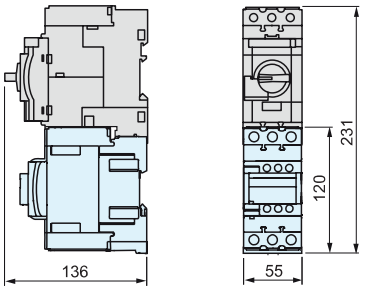

Side by side mounting with TeSys contactor LC1 D40A…D65A (S-shape busbar system GV3 S)

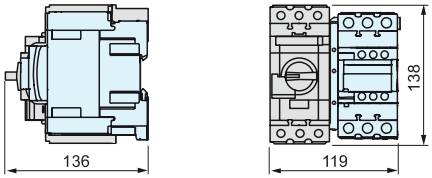

Mounting on rail AM1 DE200 or AM1 ED201



Panel mounting, using M4 screws

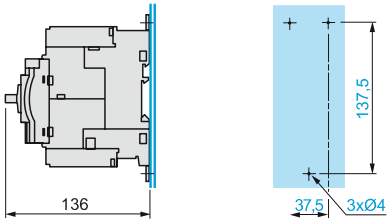

Mounting on pre-slotted plate AM1 PA

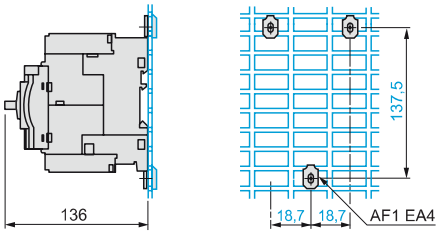

GV3 P *(continued)*

Busbar systems

Set of busbars GV3 G264



Set of busbars GV3 G364



Note: *Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.*
Horizontal mounting is possible up to 40 °C.

Mounting

Mounting of external operator GV3 APN01, GV3 APN02 or GV3 APN04 for motor circuit-breakers GV3 P

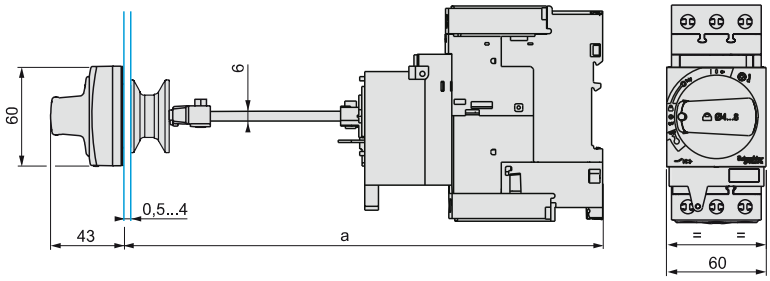

Door cut-out



(1) *For IP65 only.*

Mounting of external operator GV APH03 for motor circuit-breakers GV3 P

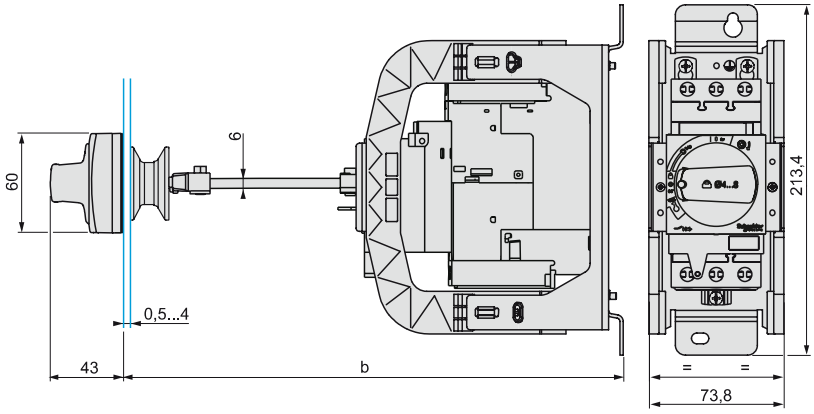

Door cut-out



(1) *For IP65 only.*

	a		b	
	Mini	Maxi	Mini	Maxi
GV3 APN●●	189	300	-	-
GV3 APN●● + GV APK12	300	481		
GV3 APN●● + GV APH03	-	-	200	300
GV3 APN●● + GV APH03 + GV APK12	-	-	300	492

GV3 ME80

Dimensions







X1 = Electrical clearance (ISC max)
40 mm for Ue ≤ 500 V, 50 mm for Ue ≤ 690 V

(1) Blocks GV3 A01…A07.

Mounting

Mounting on rail AM1 DE200 or AM1 ED201



Panel mounting, using M4 screws





Mounting on pre-slotted plate AM1 PA





GV7 R

Dimensions

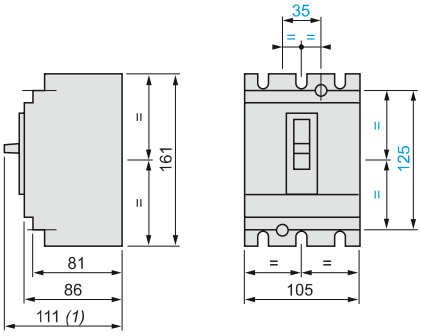

*(1) 126 for **GV7 R●220.***

Motor circuit-breakers with terminal shields or phase barriers GV7 R + GV7 AC01 or AC04

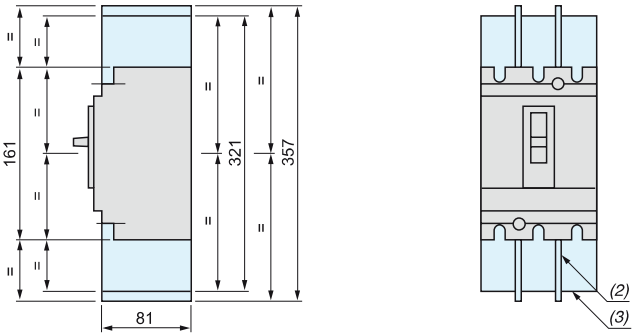

*(2) Phase barriers: **GV7 AC04***
*(3) Terminal shields: **GV7 AC01***

Combination of GV7 R and TeSys contactor LC1 F with kit GV7 AC0●

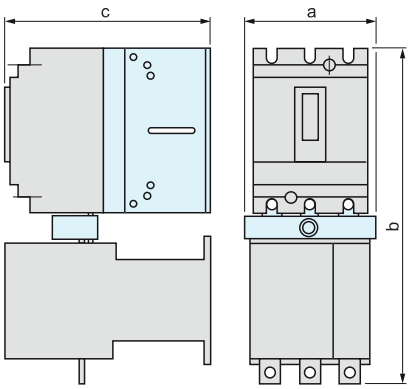

	a	b	c
GV7 R + LC1 F115 or F150 + GV7 AC06	119	334	181
GV7 R + LC1 F185 + GV7 AC06	119	338	188
GV7 R + LC1 F225 + GV7 AC07	131	358	188
GV7 R + LC1 F265 + GV7 AC07	131	364	215

Minimum distance between 2 circuit-breakers mounted side by side = 0

Minimum electrical clearance



		x1	x2
Painted or insulated metal plate, insulation or insulated bar		0	30
Bare metal plate	U ⩽ 440 V	5	35
	440 V < U < 600 V	10	35
	U ⩾ 600 V	20	35

GV7 R

Panel mounting

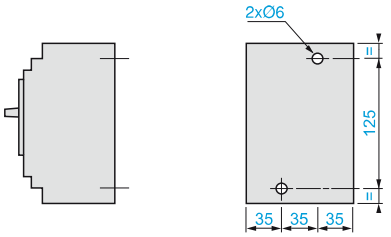

Mounting on 2 mounting rails DZ5 MB201

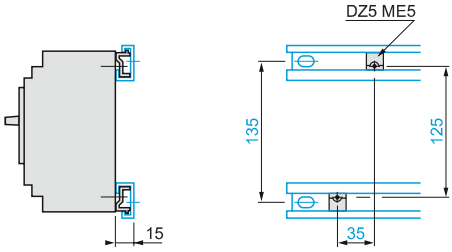

3

Flush-mounting







1 circuit-breaker GV7 R



n circuit-breakers GV7 R side by side



Combination of GV7 R and TeSys contactor LC1 F with kit GV7 AC0●

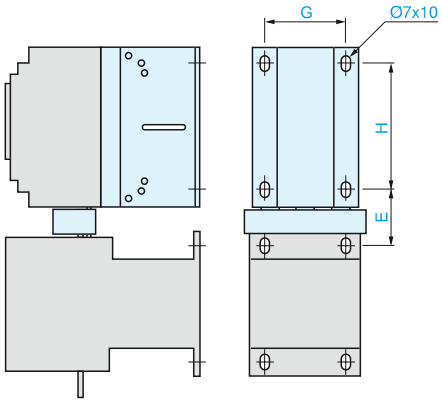

	E	G	H
GV7 R + LC1 F115 + GV7 AC06	44	85	120
GV7 R + LC1 F150 + GV7 AC06	46	85	120
GV7 R + LC1 F185 + GV7 AC06	48	85	120
GV7 R + LC1 F225 + GV7 AC07	57	85	120
GV7 R + LC1 F265 + GV7 AC07	60	85	120

GV7 R

Spreaders GV7 AC03



Connection



Smooth terminals



Connectors



	a
GV7 R●40…R●150	19.5
GV7 R●220	21.5

Direct rotary handle GV7 AP03, GV7 AP04





Flush-mounting





Direct rotary handle GV7 AP03 or GV7 AP04 with conversion accessory GV7 AP05





Front face cut-out



Enclosure viewed from top



Door cut-outs require a minimum distance between the centre of the circuit-breaker and the door hinge point Δ ≥ 100 + (h x 5)

e = 1 to 3 max

Extended rotary handle GV7 AP01, GV7 AP02

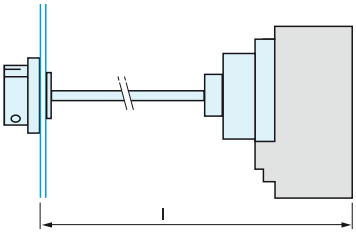



l : 185 min, 600 max
*The shaft of the extended rotary handle **GV7 AP01** or **GV7 AP02** must be cut to length: l – 126 mm.*

Schemes

GV2 ME●● and GV2 RT



GV2 P●●



GV3 P●●



3

Front mounting add-on contact blocks
Instantaneous auxiliary contacts

GV AE1 **GV AE11** **GV AE20**

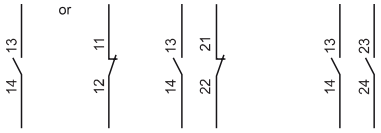

Front mounting add-on contact blocks
Instantaneous auxiliary contacts and fault signalling contacts

GV AED101 **GV AED011**

Side mounting add-on contact blocks
Instantaneous auxiliary contacts and fault signalling contacts

GV AD0110 **GV AD0101** **GV AD1010** **GV AD1001**

Instantaneous auxiliary contacts

GV AN11 **GV AN20**

Short-circuit signalling contacts

GV AM11



Voltage trips

GV AU●●● **GV AS●●●** **GV AX●●●**

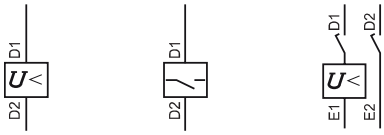

Current limiter

GV1 L3



Use of fault signalling contact and short-circuit signalling contact

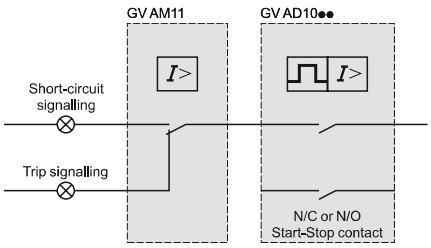

Connection of undervoltage trip for dangerous machines (conforming to INRS) on GV2 ME only

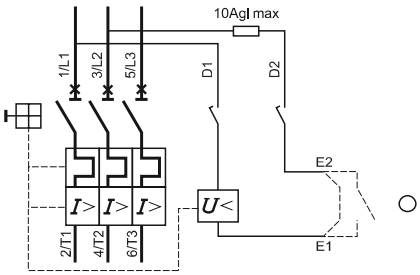

TeSys protection components
Thermal-magnetic motor circuit-breakers GV3 ME80 and GV7 R

Schemes

Motor circuit-breakers
GV3 ME80



Auxiliary contact block modules
GV3 A01 **GV3 A02** **GV3 A03** **GV3 A05** **GV3 A06** **GV3 A07**



Fault signalling contacts
GV3 A08 **GV3 A09**

Voltage trips
GV3 B **GV3 D**

Motor circuit-breakers
GV7 R



Add-on auxiliary contacts according to their location *(1)*
GV7 AE11, GV7 AB11

Location 1 C/O contact	Location 2 Trip indication	Location 3 Electrical fault indication	Location 4 C/O contact
14 12 / 11	94 92 / 91	84 82 / 81	24 22 / 21

A self-adhesive label, supplied with the contact, can be affixed to the front face of the circuit-breaker to allow personalised marking according to the function of the contact or contacts.

(1) See pages 3/20 and 3/61.

Electric trips
GV7 AU●●● **GV7 AS●●●** **GV7 AD111, AD112**

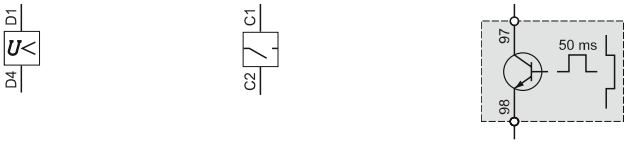

Recommended application schemes GV7 AD111, AD112
Fault indication

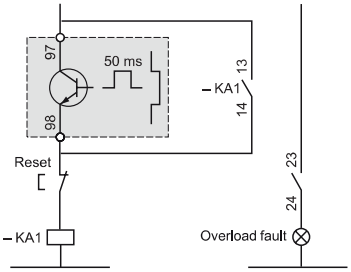

Associated components
KA1: CA2 KN or CAD N

Contactor opening on overload



Associated components
KA1: CAD + LAD 6K10 or RHK
KM1: LC1 D or LC1 F

3

GV2 L

Dimensions

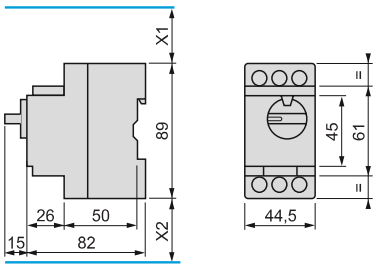

X1 Electrical clearance = 40 mm for Ue ≤ 415 V, or 80 mm for Ue = 440 V, or 120 mm for Ue = 500 and 690 V.
X2 = 40 mm.

GV AD, AM, AN, AU, AS



(1) Maximum

GV2 AK00

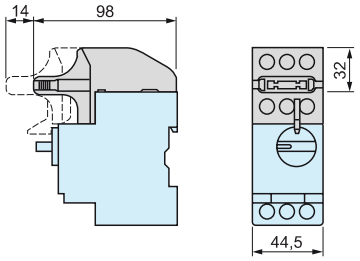

Mounting

On rail AM1 DE200, AM1 ED200 (35 x 15)



Panel mounted



On pre-slotted mounting plate AM1 PA



Adapter plate GK2 AF01





7.5 mm height compensation plate GV1 F03

GV2 LE

Dimensions

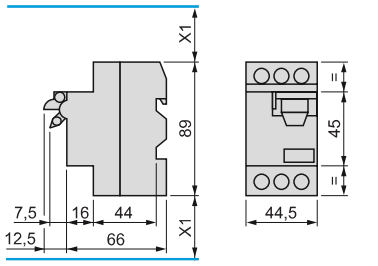

X1 Electrical clearance = 40 mm for Ue ≤ 690 V.

GV AD, AM, AN, AU, AS



(1) Maximum

GV AE

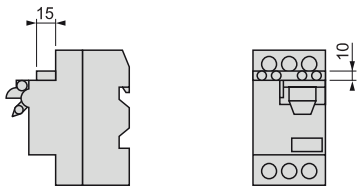

Mounting

On 35 mm ⎓ rail



c = 80 on AM1 DP200 (35 x 7.5) and 88 on AM1 DE200, ED200 (35 x15)

On panel with adapter plate GV2 AF02





On pre-slotted plate AM1 PA



On rails DZ5 MB201



Mounting

Mounting of external operator GV2 APN01, GV2 APN02 or GV2 APN04 for motor circuit-breakers GV2 L

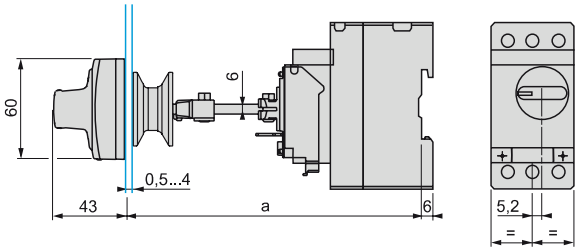

Door cut-out



(1) For IP65 only.

Mounting of external operator GV APH02 for motor circuit-breakers GV2 L

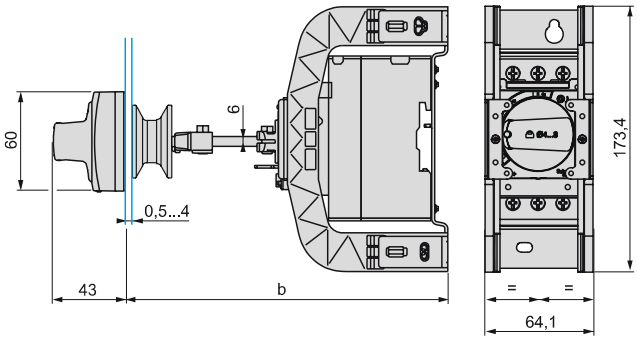

Door cut-out



(1) For IP65 only.

	a		b	
	Mini	Maxi	Mini	Maxi
GV2 APN●●	140	250		
GV2 APN●● + GV APH02			151	250
GV2 APN●● + GV APK11	250	434	-	-
GV2 APN●● + GV APH02 + GV APK11	-	-	250	445

Mounting of external operator GV2 AP03 for GV2 LE

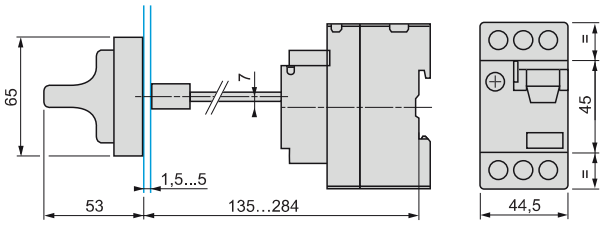

Door cut-out

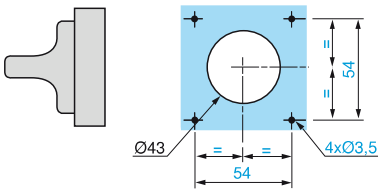

GV2 L and GV2 LE

Sets of busbars GV2 G445, GV2 G454, GV2 G472, with terminal block GV2 G05

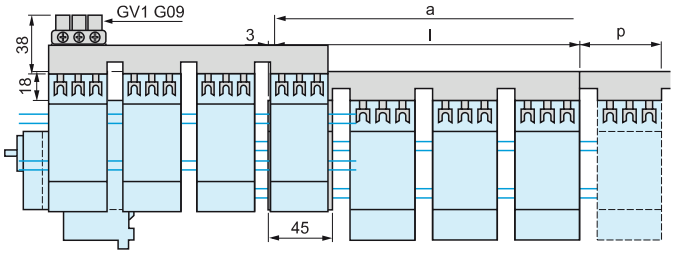

	l	p
GV2 G445 (4 x 45 mm)	179	45
GV2 G454 (4 x 54 mm)	206	54
GV2 G472 (4 x 72 mm)	260	72

	a			
Number of tap-offs	**5**	**6**	**7**	**8**
GV2 G445	224	269	314	359
GV2 G454	260	314	368	422
GV2 G472	332	404	476	548

Sets of busbars for GV2 L and GV2 LE

Sets of busbars GV2 G●●● with term. block GV1 G09

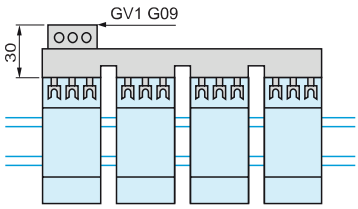

	l
GV2 G245 (2 x 45 mm)	89
GV2 G254 (2 x 54 mm)	98
GV2 G272 (2 x 72 mm)	116

Sets of busbars GV2 G245, GV2 G254, GV2 GR272



Set of busbars GV2 G554

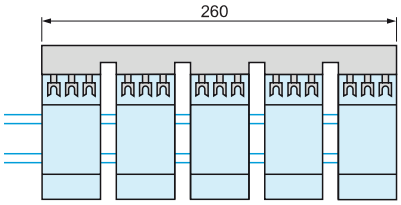

	l
GV2 G345 (3 x 45 mm)	134
GV2 G354 (3 x 54 mm)	152

Sets of busbars GV2 G345 and GV2 G354



GV3 L

Dimensions

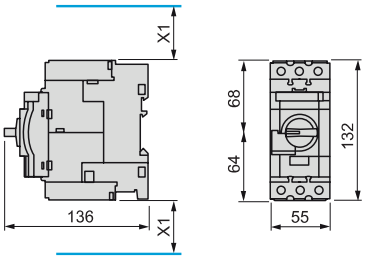



X1 = Electrical clearance (ISC max)
40 mm for Ue ≤ 500 V, 50 mm for Ue ≤ 690 V

(1) Blocks GV AN●● , GV AD●● and GV AM11
(2) Blocks GV3 AU●● and GV3 AS●●

Note: *Leave a space of 9 mm between 2 circuit-breakers: either an empty space or side-mounting add-on contact blocks.*
Side by side mounting is possible up to 40 °C.

Mounting

Mounting with Tesys contactor LC1 D40A…D65A and relay LR3 D313…365

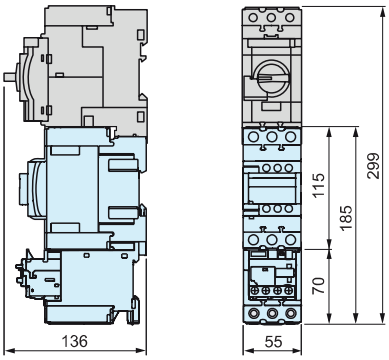

Side by side mounting with Tesys contactor LC1 D40A…D65A (S-shape busbar system GV3 S)

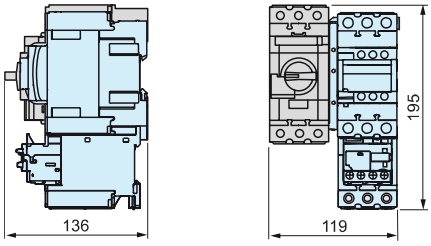

Mounting on rail AM1 DE200 or AM1 ED201



Panel mounting, using M4 screws

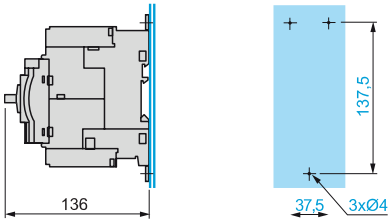

Mounting on pre-slotted plate AM1 PA

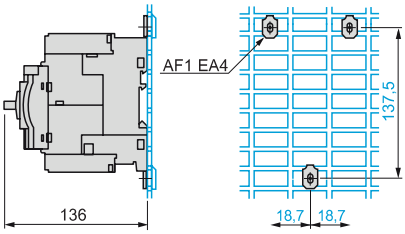

Set of busbars GV3 G264



Set of busbars GV3 G364



3

Mounting

Mounting of external operator GV3 APN01, GV3 APN02 or GV3 APN04 for motor circuit-breakers GV3 L

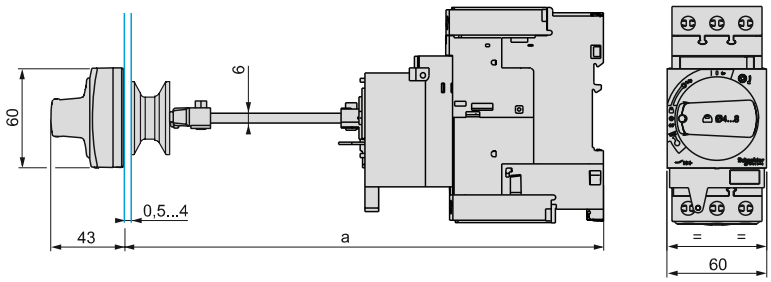

Door cut-out



(1) For IP65 only.

Mounting of external operator GV APH03 for motor circuit-breakers GV3 L

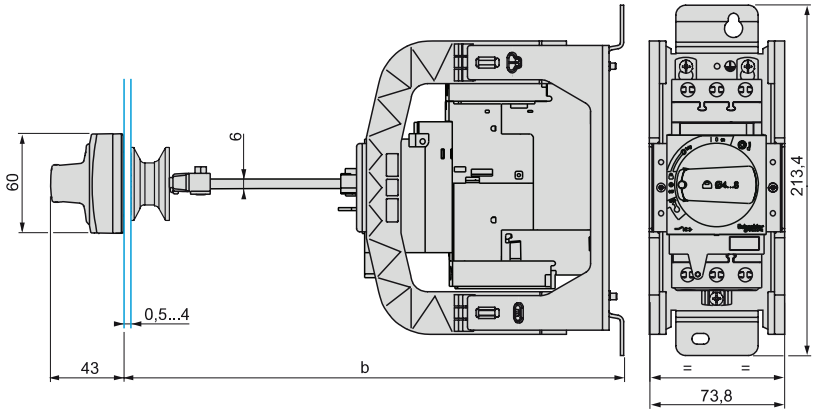

Door cut-out



(1) For IP65 only.

	a		b	
	Mini	Maxi	Mini	Maxi
GV3 APN●●	189	300	-	-
GV3 APN●● + GV APK12	300	481		
GV3 APN●● + GV APH03	-	-	200	300
GV3 APN●● + GV APH03 + GV APK12	-	-	300	492

GK3 EF80

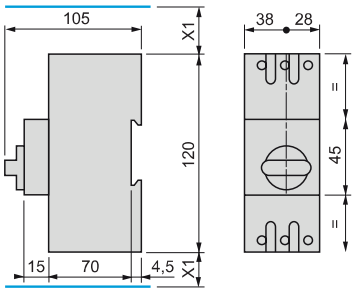

GK3 EF80 + 4 GK2 AX



	Number of GK2 AX				
	0	1	2	3	4
a	66	74.8	83.5	92.5	101

Magnetic motor circuit-breakers

GV2 L●●



GV2 LE●●



GV3 L●●



GK3 EF80



Accessories

Front mounting add-on contact blocks
Instantaneous auxiliary contacts

GV AE1



GV AE11

GV AE20

GV AED101 and GV AED011



Side mounting add-on contact blocks
Instantaneous auxiliary contacts and fault signalling contacts

GV AD0110



GV AD0101



GV AD1010



GV AD1001



Instantaneous auxiliary contacts

GV AN11



GV AN20



Short-circuit signalling contacts

GV AM11



Voltage trips

GV AU●●●



GV AS●●●



Start-Stop signalling contact blocks

GK2 AX10

GK2 AX20



GK2 AX50



Fault signalling contact blocks

GK2 AX12

GK2 AX22



GK2 AX52